

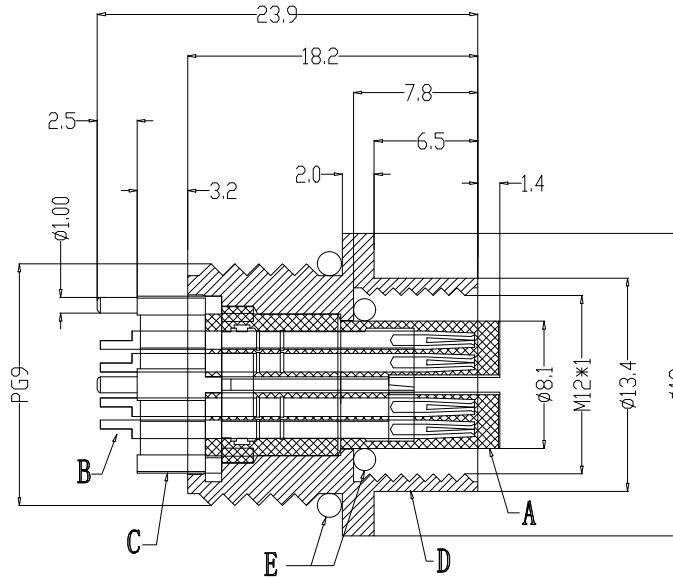
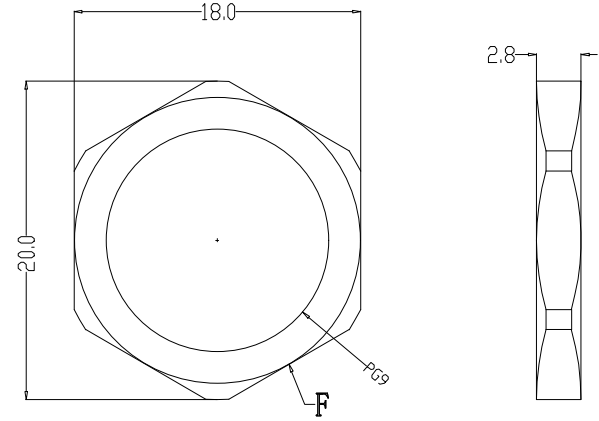
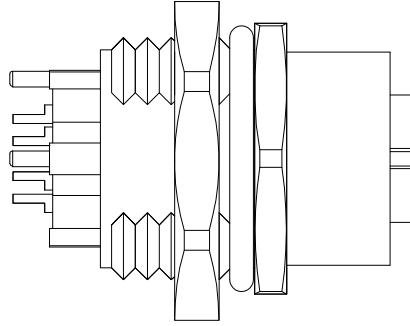


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

Recommended Panel Cut-out

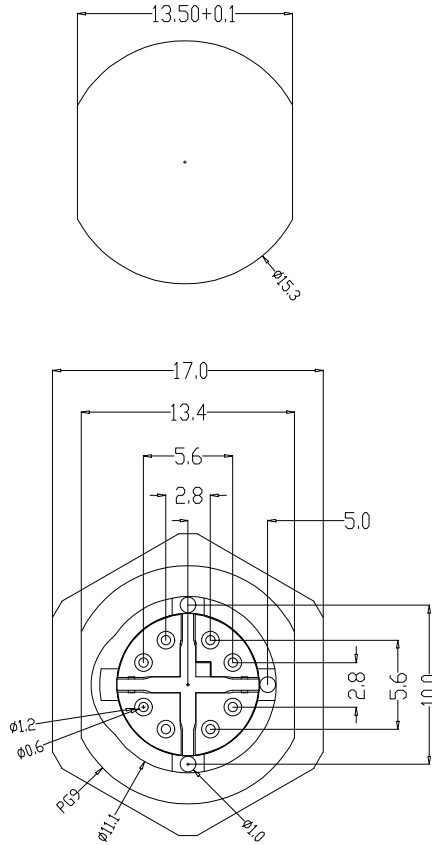

Engagement force	≤50N	Rated volage	48V
Disengagement force	≥10N	Rated current	0.5A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	8
C	OUTER CONTACT	ZINC ALLOY	NICKL PLATED	1
D	SHIELD	BRASS	NICKL PLATED	1
E	O-RING	EPDM	SPECIFY COLOR	2
F	NUT	BRASS	NICKL PLATED	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd	
A0	NEW RELEASE		UNIT:mm	1:1			M12X08-04-111	ENDE05		
			SIZE: A4	APPROVED			TITLE:		REV: A0	SHEET: 1/1
				DESIGNER			M12后锁面板 X编码 8芯母头 焊线式 开孔PG9 SW17T			
				DRAWN						