

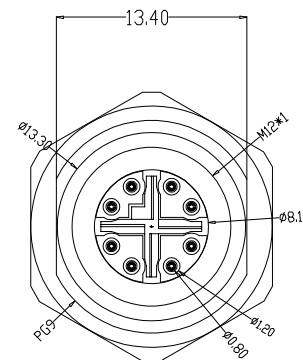
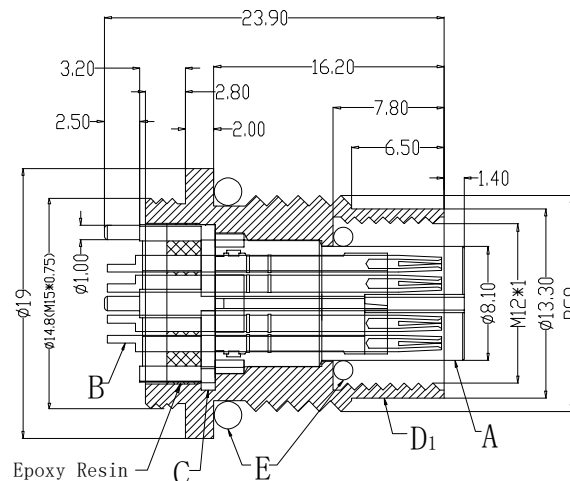
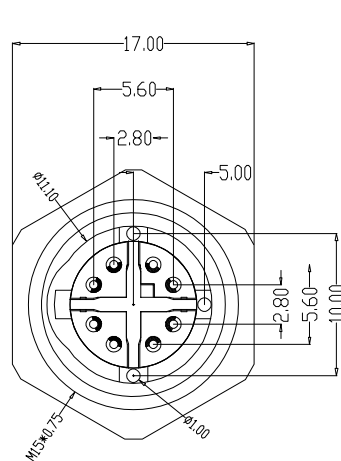
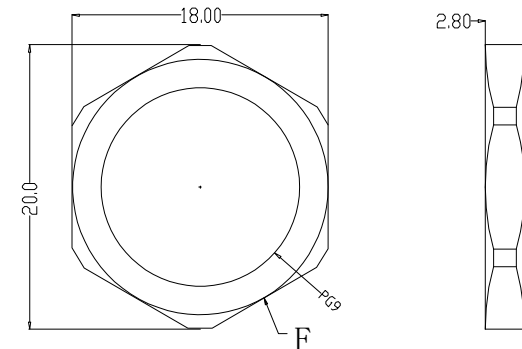
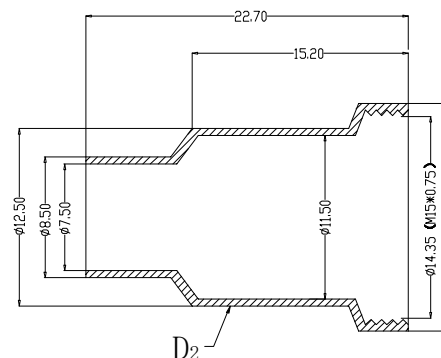



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

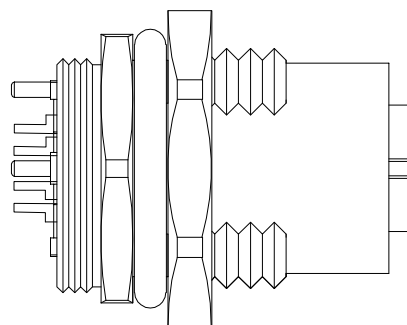

Recommended Panel Cut-out



组合图

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	8
C	OUTER CONTACT	ZINC ALLOY	NICKL PLATED	1
D	SHIELD	BRASS	NICKL PLATED	1+1
E	O-RING	EPDM	BLACK	2
F	NUT	ZINC ALLOY	BLACK	1

Engagemnr firce	≤50N	Rated voltage	48v
Disengagement force	≥10N	Rated current	0.5A
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ
IP rating	IP67/IP68	Conract resistanctance	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE			LINEAR	ANGLES	1:1						
				0.0±0.35	X°REF±6°	APPROVED			M12X08-04-112	ENDE05		
				0.00±0.25	X°±3°	DESIGNER			TITLE:			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN		M12前锁面板 X编码 8芯 母头 焊线式 开孔PG9 SW17T			
									REV: AO		SHEET: 1/1	