


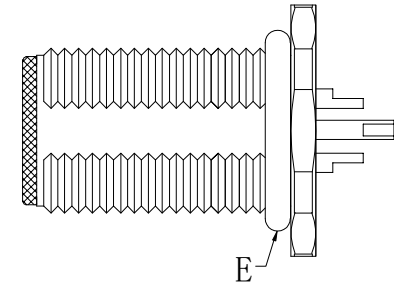




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

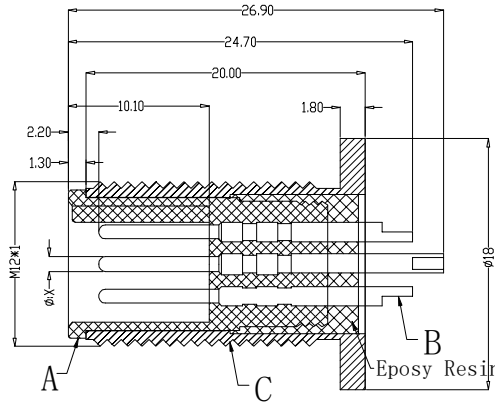


PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-CODE 图形							
B-CODE 图形							
D-CODE 图形							

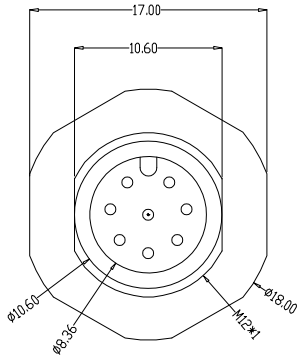

P/N	TITLE
M12A02-03-110	M12防水 A-CODE 2P线端公头 前锁面板式M12 SW17T
M12A03-03-110	M12防水 A-CODE 3P线端公头 前锁面板式M12 SW17T
M12A04-03-110	M12防水 A-CODE 4P线端公头 前锁面板式M12 SW17T
M12A05-03-110	M12防水 A-CODE 5P线端公头 前锁面板式M12 SW17T
M12A06-03-110	M12防水 A-CODE 6P线端公头 前锁面板式M12 SW17T
M12A07-03-110	M12防水 A-CODE 7P线端公头 前锁面板式M12 SW17T
M12A08-03-110	M12防水 A-CODE 8P线端公头 前锁面板式M12 SW17T
M12B02-03-110	M12防水 B-CODE 2P线端公头 前锁面板式M12 SW17T
M12B03-03-110	M12防水 B-CODE 3P线端公头 前锁面板式M12 SW17T
M12B04-03-110	M12防水 B-CODE 4P线端公头 前锁面板式M12 SW17T
M12B05-03-110	M12防水 B-CODE 5P线端公头 前锁面板式M12 SW17T
M12D02-03-110	M12防水 D-CODE 2P线端公头 前锁面板式M12 SW17T
M12D03-03-110	M12防水 D-CODE 3P线端公头 前锁面板式M12 SW17T
M12D04-03-110	M12防水 D-CODE 4P线端公头 前锁面板式M12 SW17T



Recommended Panel Cut-out



Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8PIN:30V	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8PIN:2A	B	CONTACT	BRASS	GOLD PLATED	2~8
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
IP rating	IP67/IP68	Conract resistangce	≤10MΩ	D	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd			
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1								
				0.0±0.35	X'REF±6°	APPROVED								
				UNIT:mm	0.00±0.25	X'±3'						DESIGNER		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN			TITLE:					
										M12XXX-03-110	ENDE05			
										M12防水 2~8P线端公头 前锁面板式M12 SW17T			REV: A0	SHEET: 1/1