


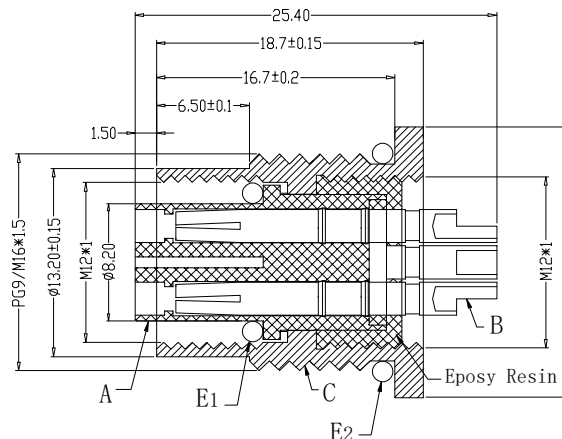
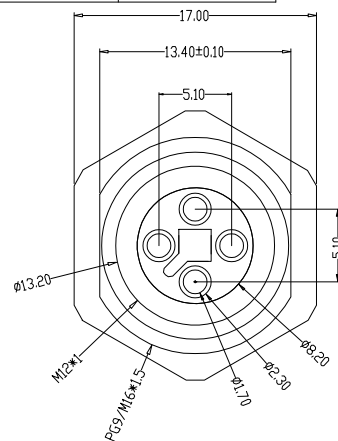
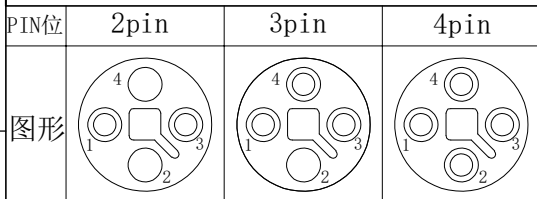



RoHS

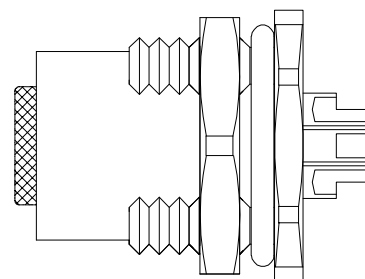

Recommended Panel Cut-out

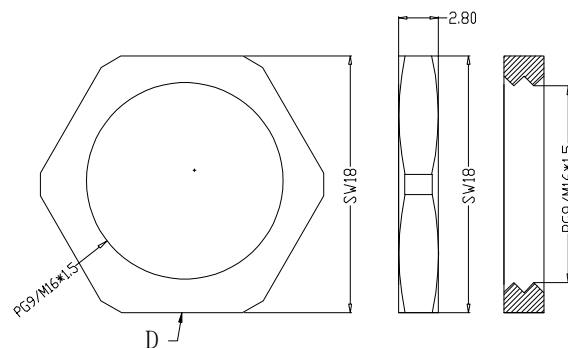

组合图

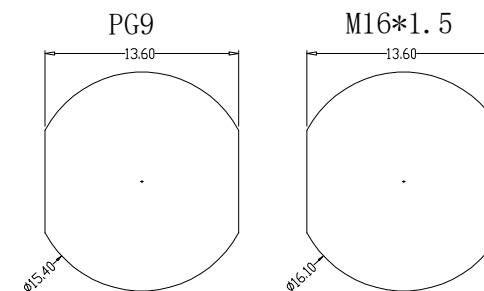

Engagemenr firce	≤50N	Rated volage	50V AC/60VDC		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	12A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	2~4
IP rating	IP67/IP68	Conract resistangce	≤10MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
				D	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E	O-RING	EPDM	BLACK	2

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED			M12XXX-04-084	ENDE05		
				0.0±0.35	X*REF±6°	DESIGNER			TITLE:			
			UNIT:mm	0.00±0.25	X*±3°				M12防水 线端母头 T-CODE 前锁面板式PG9/M16 SW17T		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN						



Wanlian Technology Co., Ltd.

REV: A0	SHEET: 1/1
---------	------------