


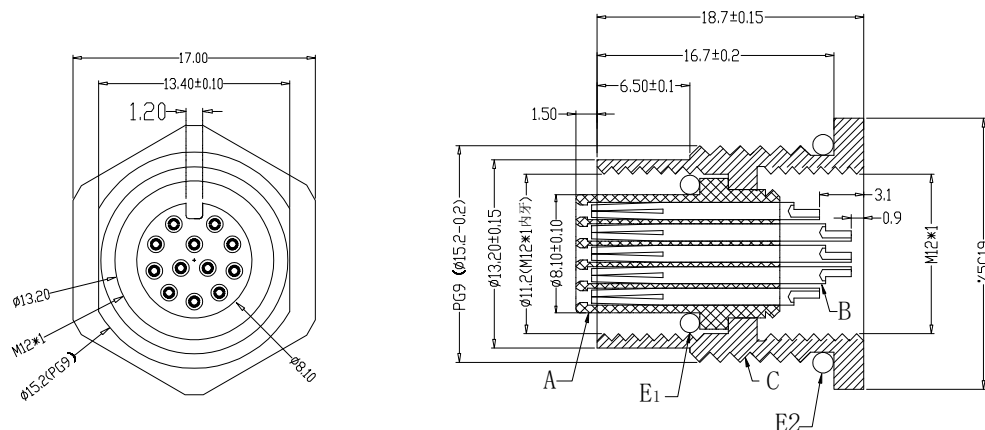
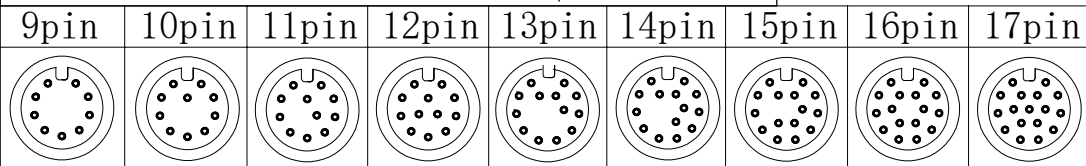



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

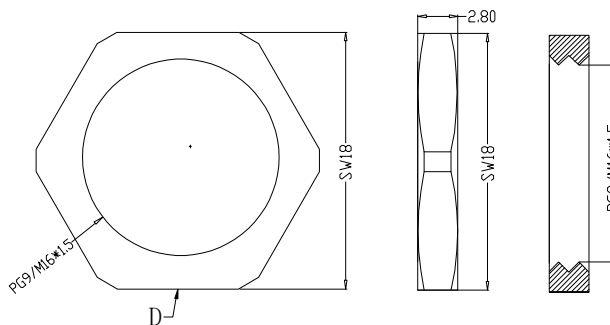

Recommended Panel Cut-out

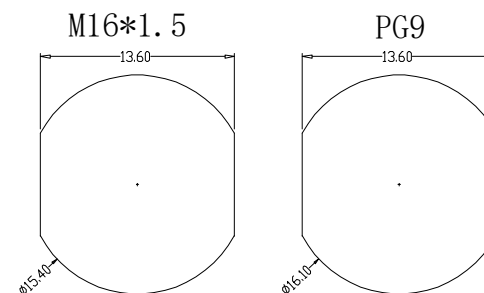

组合图

P/N	TITLE
M12A09-04-092	M12防水 A-CODE 9P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A10-04-092	M12防水 A-CODE 10P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A11-04-092	M12防水 A-CODE 11P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A12-04-092	M12防水 A-CODE 12P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A13-04-092	M12防水 A-CODE 13P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A14-04-092	M12防水 A-CODE 14P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A15-04-092	M12防水 A-CODE 15P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A16-04-092	M12防水 A-CODE 16P线端母头 前锁面板式PG9/M16 SW17T后灌胶
M12A17-04-092	M12防水 A-CODE 17P线端母头 前锁面板式PG9/M16 SW17T后灌胶

Engagemer firce	≤50N	Rated volage	30V DC		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	1.5A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	9~17
				C	OUTER CONTACT	BRASS	NICKL PLATED	1
IP rating	IP67/IP68	Conract resistangce	≤10MΩ	D	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E	O-RING	EPDM	BLACK	2

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd.
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED			M12XXX-04-092	ENDE05	
				0.0±0.35	X'REF±6°						
				UNIT:mm	0.00±0.25	X'±3°	DESIGNER			TITLE:	
				SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN			M12防水 9~17P线端母头 前锁板式PG9/M16 SW17T后灌胶	
										REV: AO	SHEET: 1/1