


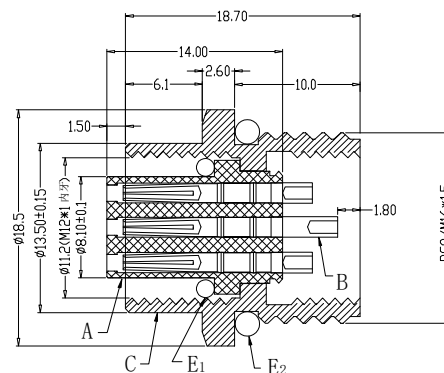



pin位	2pin	3pin4改3	4pin	5pin正方形	6pin	7pin	8pin
A-CODE 图形							
B-CODE 图形							
D-CODE 图形							




Recommended Panel Cut-out

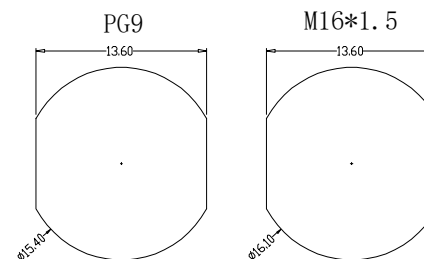

P/N	TITLE
M12A02-04-093	M12防水 A-CODE 2P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12A03-04-093	M12防水 A-CODE 3P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12A04-04-093	M12防水 A-CODE 4P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12A05-04-093	M12防水 A-CODE 5P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12A06-04-093	M12防水 A-CODE 6P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12A07-04-093	M12防水 A-CODE 7P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12A08-04-093	M12防水 A-CODE 8P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12B02-04-093	M12防水 B-CODE 2P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12B03-04-093	M12防水 B-CODE 3P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12B04-04-093	M12防水 B-CODE 4P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12B05-04-093	M12防水 B-CODE 5P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12D02-04-093	M12防水 D-CODE 2P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12D03-04-093	M12防水 D-CODE 3P线端母头 后锁面板式PG9/M16 SW17T后灌胶
M12D04-04-093	M12防水 D-CODE 4P线端母头 后锁面板式PG9/M16 SW17T后灌胶



组合图

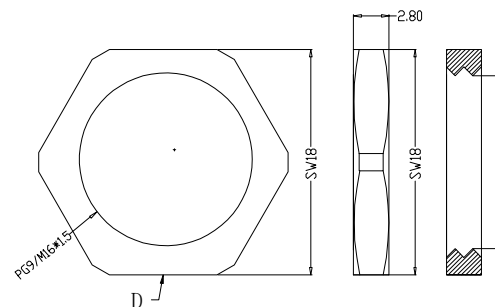

Engagemenr firce	≤50N	Rated volage	2-5pin:60v 6-8pin:30v		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	2-5pin:4A 6-8pin:2A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	2~8
IP rating	IP67/IP68	Conract resistangce	≤10MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	2

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED			M12XXX-04-093	ENDE05		
				0.0±0.35	X*REF±6°							
			UNIT:mm	0.00±0.25	X*±3°	DESIGNER			TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN			M12防水 线端母头 后锁面板式PG9/M16 SW17T后灌胶			