


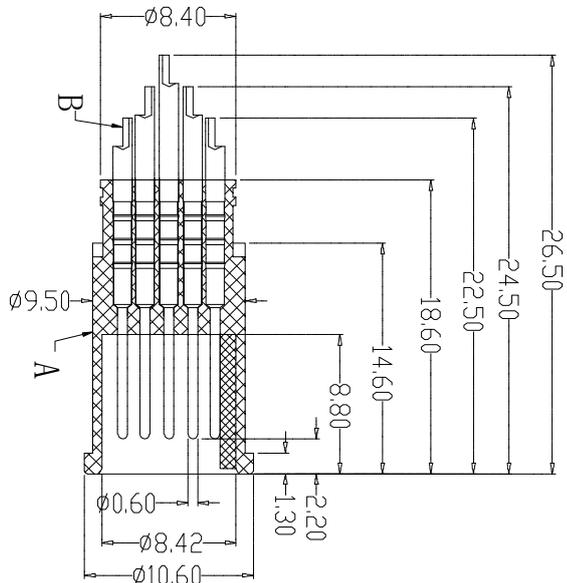

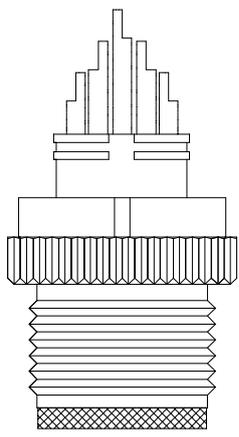
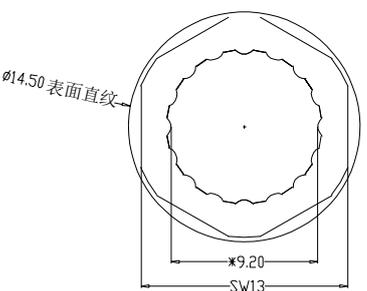
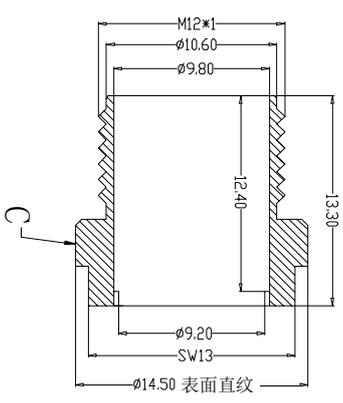


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

9pin	10pin	11pin	12pin	13pin	14pin	15pin	16pin	17pin
------	-------	-------	-------	-------	-------	-------	-------	-------



组合图



P/N TITLE

M12A09-07-092	M12防水 A-CODE 09P线端公头 G款+14L 防振动六角螺丝	Engagement force	≤50N	Rated voltage	30V	PARTS	MATERIALS	TREATMENT	AMOUNT
M12A10-07-092	M12防水 A-CODE 10P线端公头 G款+14L 防振动六角螺丝	Disengagement force	≥10N	Rated current	1.5A	A	HOUSING	PA66+GF	SPECIFY COLOR
M12A11-07-092	M12防水 A-CODE 11P线端公头 G款+14L 防振动六角螺丝	Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED
M12A12-07-092	M12防水 A-CODE 12P线端公头 G款+14L 防振动六角螺丝	IP rating	IP67/IP68	Contract resistance	≤10MΩ	C	NUT	BRASS	NICKL. PLATED
M12A13-07-092	M12防水 A-CODE 13P线端公头 G款+14L 防振动六角螺丝	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D			
M12A14-07-092	M12防水 A-CODE 14P线端公头 G款+14L 防振动六角螺丝					E			
M12A15-07-092	M12防水 A-CODE 15P线端公头 G款+14L 防振动六角螺丝								
M12A16-07-092	M12防水 A-CODE 16P线端公头 G款+14L 防振动六角螺丝								
M12A17-07-092	M12防水 A-CODE 17P线端公头 G款+14L 防振动六角螺丝								

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1			M12XXX-07-092	ENDE05
			0.0±0.35	X'REF±6°	APPROVED				
			UNIT:mm	X'±3'	DESIGNER			TITLE:	
			SIZE:A4	X'X'±2'	DRAWN			M12防水 9~17P线端公头 G款+14L 防振动六角螺丝	
1	2	3	4	5	6	7	8		



REV: AO SHEET: 1/1