








The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements



PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-CODE 图形							

B-CODE 图形				
-----------	--	--	--	--

D-CODE 图形			
-----------	--	--	--

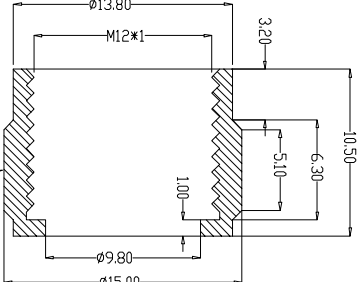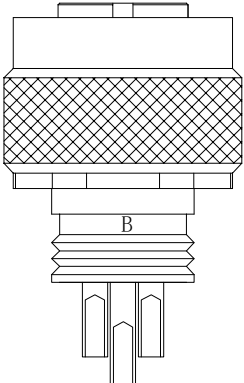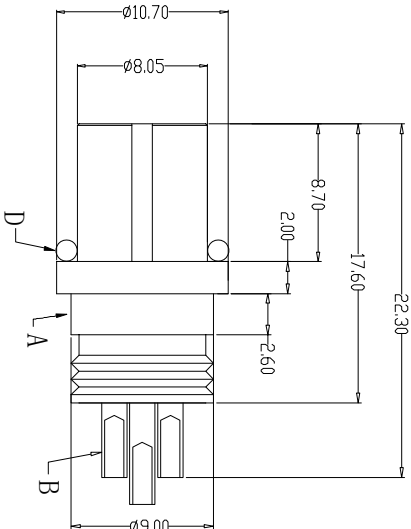

组合图

P/N		TITLE	
M12A02-08-069	M12防水 A-CODE 2P线端母头 C款+10. 5L网纹POM螺母		
M12A03-08-069	M12防水 A-CODE 3P线端母头 C款+10. 5L网纹POM螺母		
M12A04-08-069	M12防水 A-CODE 4P线端母头 C款+10. 5L网纹POM螺母		
M12A05-08-069	M12防水 A-CODE 5P线端母头 C款+10. 5L网纹POM螺母		
M12A06-08-069	M12防水 A-CODE 6P线端母头 C款+10. 5L网纹POM螺母		
M12A07-08-069	M12防水 A-CODE 7P线端母头 C款+10. 5L网纹POM螺母		
M12A08-08-069	M12防水 A-CODE 8P线端母头 C款+10. 5L网纹POM螺母		
M12B02-08-069	M12防水 B-CODE 2P线端母头 C款+10. 5L网纹POM螺母		
M12B03-08-069	M12防水 B-CODE 3P线端母头 C款+10. 5L网纹POM螺母		
M12B04-08-069	M12防水 B-CODE 4P线端母头 C款+10. 5L网纹POM螺母		
M12B05-08-069	M12防水 B-CODE 5P线端母头 C款+10. 5L网纹POM螺母		
M12D02-08-069	M12防水 D-CODE 2P线端母头 C款+10. 5L网纹POM螺母		
M12D03-08-069	M12防水 D-CODE 3P线端母头 C款+10. 5L网纹POM螺母		
M12D04-08-069	M12防水 D-CODE 4P线端母头 C款+10. 5L网纹POM螺母		

Engagement force	≤50N	Rated voltage	2-5pin: 60v 6-8pin: 30v	⚡	PARTS	MATERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	2-5pin: 4A 6-8pin: 2A	⚡	HOUSING	PA66+GF	SPECITY COLOR 1	
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	⚡	B	CONTACT	BRASS	GOLD PLATED 2~8
IP rating	IP67/IP68	Contract resistance	≤10MΩ	⚡	C	NUT	POM	BLACK 1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	⚡	D	O-RING	EPDM	BLACK 1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	Wanlian Technology Co., Ltd	
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED			M12XXX-08-069	ENDE05	REV: AO	SHEET: 1/1

1	2	3	4	5	6	7	8
		SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN		
		UNIT: mm	0.00±0.25	X'±3°	DESIGNER		

