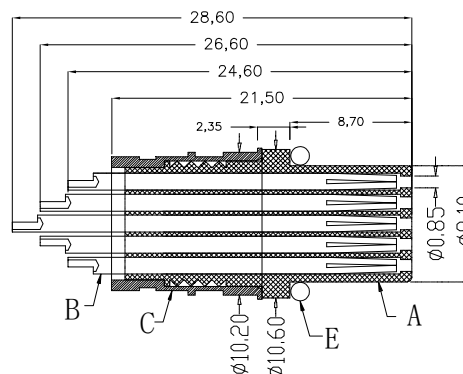



组合图

Engagemnr firce	≤50N	Rated volage	30V		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	1.5A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	9~17
				C	OUTER CONTACT	BRASS	NICKL PLATED	1
IP rating	IP67/IP68	Conract resistangce	≤10MΩ	D	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E	O-RING	EPDM	BLACK	1

 万连科技
WanLian Technology Co., Ltd