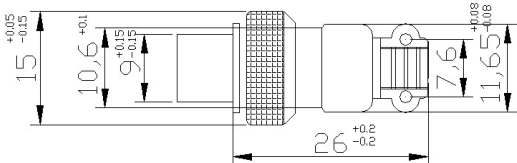
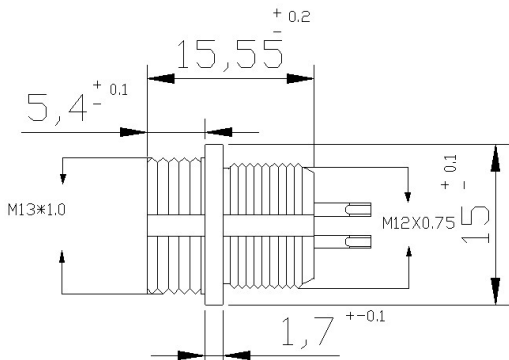


M12 圆形电连接器 电缆式插头

图例	安装尺寸	芯数	订货代号
		2	M12-2A
		3	M12-3A
		4	M12-4A
		5	M12-5A
		6	M12-6A
		7	M12-7A


M12 圆形电连接器 双切面定位插座

图例	安装尺寸	芯数	订货代号
		2	M12-2B
		3	M12-3B
		4	M12-4B
5		M12-5B	
6		M12-6B	
		7	M12-7B

M12 圆形电连接器 材料参数

主要用料

部件	外壳	绝缘体	接触件
材料	锌合金镀镍	胶木(热固性塑料)	铜合金镀银

芯数	2	3	4	5	6	7
孔位排列						
额定电流/电压	5A-125V	5A-125V	5A-125V	5A-125V	5A-125V	5A-125V
工作电压 (AC.V) 分钟	200	200	200	200	200	200
耐电压 (AC.V) 分钟	1500	1500	1500	1500	1500	1500
绝缘阻抗 (MΩ MIN.) DC 500V	1500	1500	1500	1500	1500	1500
接触阻抗 (MΩ MIN.) DC 1A	5	5	5	5	5	5
焊杯口孔径Ø (mm)	0.8	0.8	0.8	0.8	0.8	0.8
接触体孔径Ø (mm)	1.2	1.2	1.2	1.2	1.2	1.2