


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

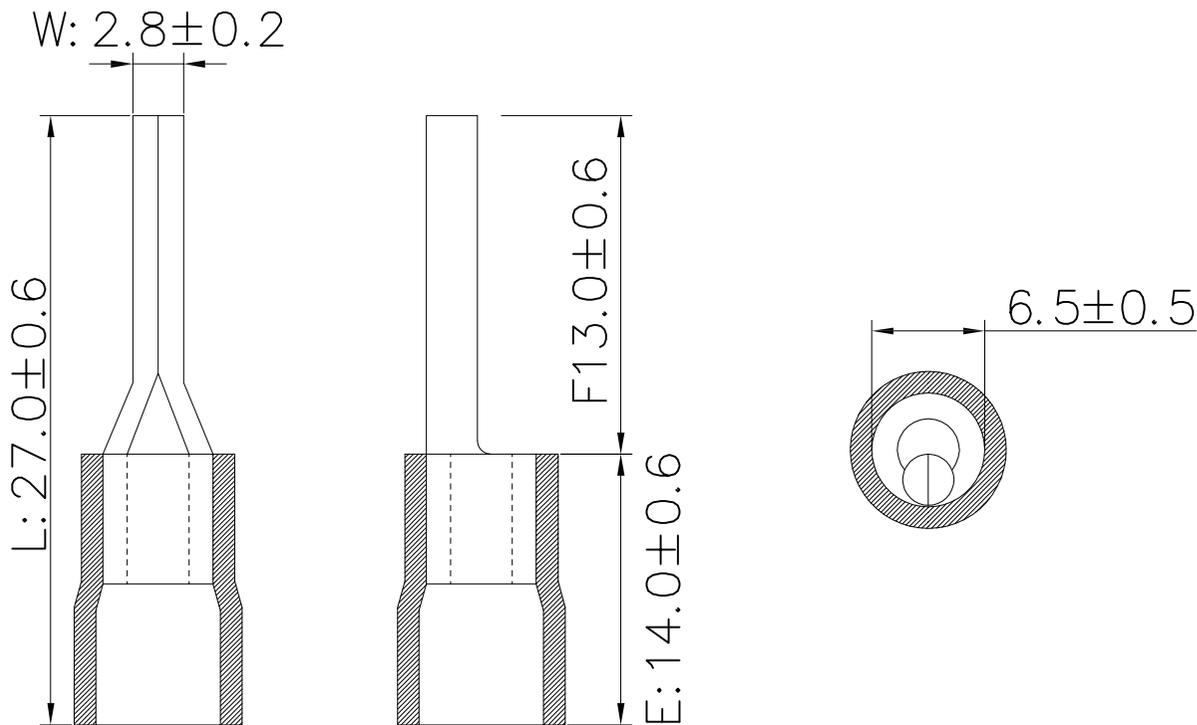

备注:

1. 接压线径: 4-6mm² (12-10A. W. G)
2. 端子材质: 紫铜 厚度: 1.0±0.03
3. 绝缘材质: PVC; 绝缘护套温度: 常温; 绝缘护套颜色: 黄色
4. 表面处理: 镀锡 镀层厚度: 2.5um-5um 镀层温度: 120° /2小时
5. 接线类型: 绞合线
6. 最大电流: 48A

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	22.07.07			LINEAR	ANGLES	APPROVED	Wang_jr	22.07.07	WLLP13-065AD03EB97	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	22.07.07	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.07.07	PVC绝缘护套针形单粒端子		