


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

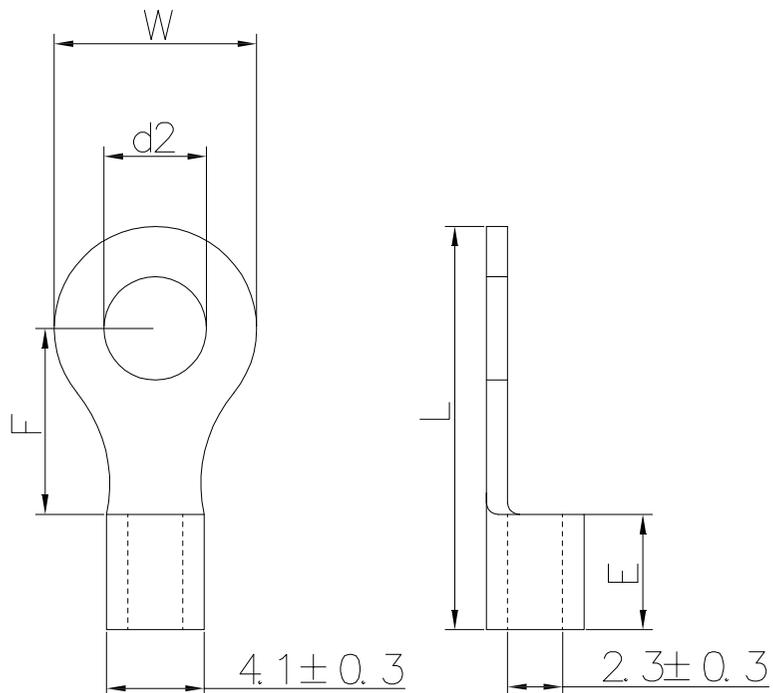

备注:

1. 端子材质: 紫铜, 厚度:  $0.8 \pm 0.03$
2. 缝隙: 焊接
3. 表面处理: 镀锡, 镀层厚度:  $2.5\mu\text{m}-5\mu\text{m}$   
镀层温度:  $120^\circ / 2$ 小时
4. 接线类型: 绞合线
5. 最大电流: 27A

| ItemNO. 料号         | 螺栓规格      | mm/inch主要尺寸    |                |                |                |               |
|--------------------|-----------|----------------|----------------|----------------|----------------|---------------|
|                    | Stud Size | d 2            | W              | L              | F              | E             |
| WLLR20-032AB030A42 | # 4       | $3.2 \pm 0.15$ | $6.6 \pm 0.2$  | $13.0 \pm 0.5$ | $4.3 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-037AB030A43 | # 6       | $3.7 \pm 0.15$ | $6.6 \pm 0.2$  | $13.0 \pm 0.5$ | $4.7 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-037AB030A44 | # 6       | $3.7 \pm 0.15$ | $6.6 \pm 0.2$  | $14.5 \pm 0.5$ | $6.0 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-037AB030A45 | # 6       | $3.7 \pm 0.15$ | $8.5 \pm 0.2$  | $16.8 \pm 0.5$ | $7.7 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-043AB030A46 | # 8       | $4.3 \pm 0.2$  | $6.6 \pm 0.2$  | $14.5 \pm 0.5$ | $6.5 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-043AB030A47 | # 8       | $4.3 \pm 0.2$  | $8.5 \pm 0.2$  | $16.8 \pm 0.5$ | $7.7 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-053AB030A48 | # 10      | $5.3 \pm 0.2$  | $8.5 \pm 0.2$  | $16.8 \pm 0.5$ | $7.7 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-053AB030A49 | # 10      | $5.3 \pm 0.2$  | $9.5 \pm 0.2$  | $16.8 \pm 0.5$ | $7.0 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-064AB030A50 | 1/4       | $6.4 \pm 0.3$  | $9.5 \pm 0.2$  | $16.8 \pm 0.5$ | $7.0 \pm 0.5$  | $4.8 \pm 0.5$ |
| WLLR20-064AB030A51 | 1/4       | $6.4 \pm 0.3$  | $12.0 \pm 0.2$ | $21.8 \pm 0.7$ | $11.0 \pm 0.7$ | $4.8 \pm 0.7$ |
| WLLR20-084AB030A52 | 5/16      | $8.4 \pm 0.4$  | $12.0 \pm 0.2$ | $21.8 \pm 0.7$ | $11.0 \pm 0.7$ | $4.8 \pm 0.7$ |
| WLLR20-105AB030A53 | 3/8       | $10.5 \pm 0.4$ | $14.6 \pm 0.2$ | $25.5 \pm 0.7$ | $13.0 \pm 0.7$ | $4.8 \pm 0.7$ |
| WLLR20-130AB030A54 | 1/2       | $13.0 \pm 0.4$ | $19.2 \pm 0.2$ | $30.4 \pm 0.7$ | $15.5 \pm 0.7$ | $4.8 \pm 0.7$ |

| REV. | REVISION RECORD | DATE     |          | GENERAL TOLERANCES |               | SCALE:<br>1:1 | NAME        | DATE     | PART.NO:<br>WLLR20-XXXAB030AXX | DWG.NO:<br>ENDE05 |            |
|------|-----------------|----------|----------|--------------------|---------------|---------------|-------------|----------|--------------------------------|-------------------|------------|
| AO   | NEW RELEASE     | 21.11.17 |          | LINEAR             | ANGLES        | APPROVED      | Wang_jr     | 21.11.17 |                                |                   |            |
|      |                 |          | UNIT:mm  | $0.00 \pm 0.25$    | $X' \pm 3'$   | DESIGNER      | Han_Gao     | 21.11.17 | TITLE:                         |                   |            |
|      |                 |          | SIZE: A4 | $0.000 \pm 0.10$   | $X'X' \pm 2'$ | DRAWN         | Zijun_Huang | 21.11.17 | 无绝缘护套0形连续端子                    |                   |            |
|      |                 |          |          |                    |               |               |             |          |                                | REV: A0           | SHEET: 1/1 |