

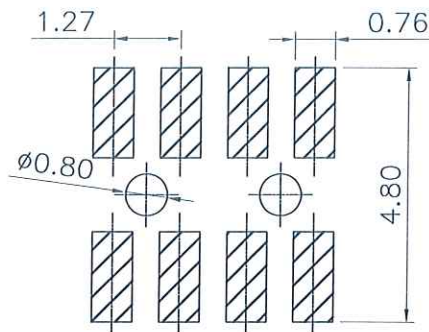
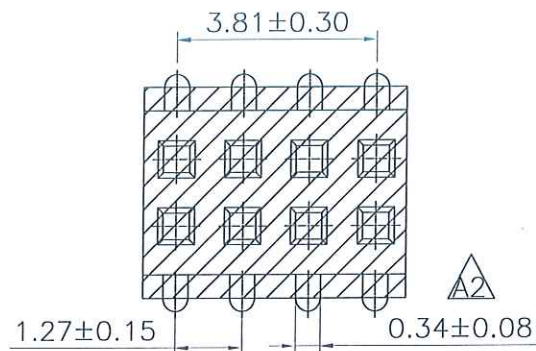


(RoHS)

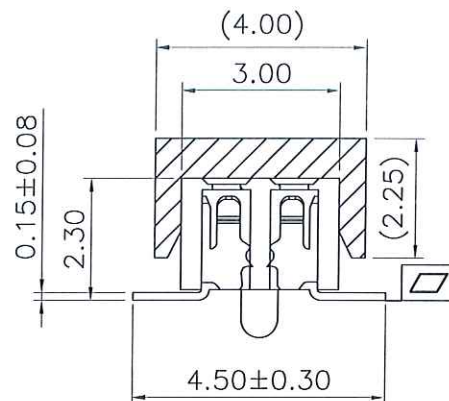

RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ± 0.05

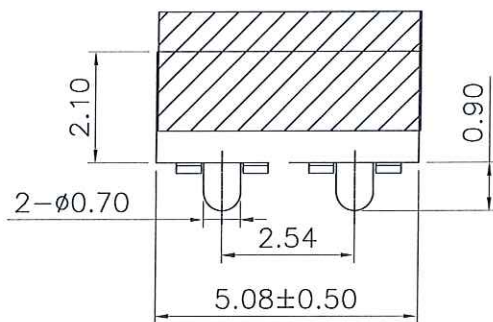

2*2~2*15P		0.10
2*16~2*20P		0.12
2*21~2*40P		0.15

—TERMIPOINT:
2-SMT






REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH127621F0-2XX2XXX02	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	REV: A2	SHEET: 1/2
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED		22.8.19					
A1	UPDATE TERMINAL MATERIAL	25.01.06		0.0±0.35	X°REF±6°	DESIGNER		25.8.19					
A2	UPDATE UPDATE THE WIDTH OF THE TERMINAL PINSTERMINAL MATERIAL	25.08.15		UNIT:mm	0.00±0.25	X°±3°	DRAWN		25.08.15				
			SIZE: A4	0.000±0.10	X°X° ±2°				TITLE: 1.27双排排母H2.1 带柱SMT+CAP 2X4P				

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

NOTE:

- 1、成品组装完并OQ检查完后、将其装入承载带内、同时用封装胶带冷封
- 2、检查REEL板状卷带是否松动，如有松动需要重新贴紧
- 3、全检OK后、将REEL装盘入PE袋并放入一包干燥剂
- 4、每个REEL上必须贴上料号以及数量
- 5、产品放入REEL时前后各空32PCS不放产品
- 6、每盘装产品2000PCS，每箱装12盘，每一外箱装产品2000*12=24000PCS
- 7、保护带:材质为PET;透明色;
- 8、上带:材质为PET;透明色;冷封自粘带
- 9、Reel卷盘:PS材质;蓝色

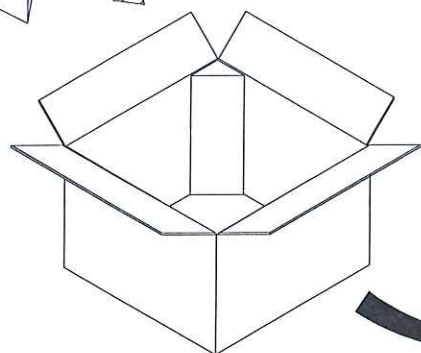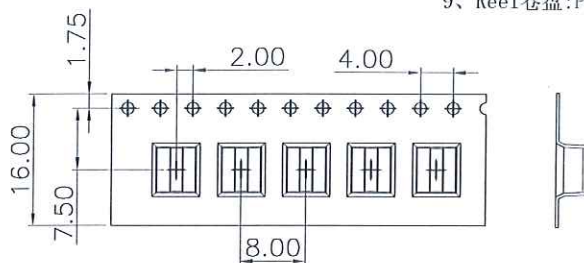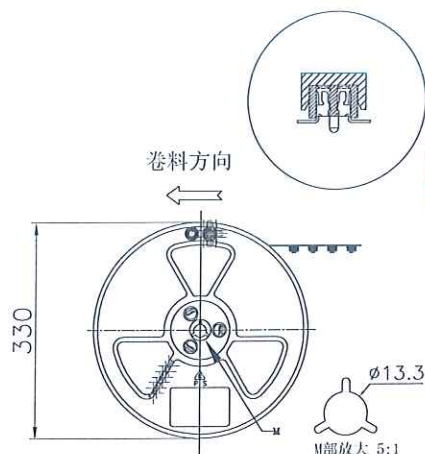

载带引出方向



Carton B surface

纸箱规格: K=K 338*338*260mm

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH127621F0-2082XXX02	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	王连	25.8.19				
A1	UPDATE TERMINAL MATERIAL	25.01.06	UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	王连	25.8.19 <th rowspan="2">TITLE: 1.27双排排母H2.1 带柱SMT+CAP 2X4P</th> <th rowspan="2"></th> <th rowspan="2"></th>	TITLE: 1.27双排排母H2.1 带柱SMT+CAP 2X4P			
A2	UPDATE TERMINAL MATERIAL	25.01.06		0.00±0.25	X°±3°	DRAWN	王连	25.8.19				
			SIZE: A4	0.000±0.10	X°X°±2°						REV: A1	SHEET: 2/2