

广东万通科技有限公司

各册书专用章

产品中心

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: THERMOPLASTIC HIGH TEMP, UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 1A AC/DC
 - 3-2. CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING : 300V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -40°C~+105°C.
5. PACKAGE SPEC: REEL
6. P/N:

 FH1276 43 F 0-2 XX 2 X X X 06

SERIES NO: _____

HEIGHT: _____

43: 4.3mm

MALE FEMALE: _____

F-FEMALE

ANGLE: _____

0-180~

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____






XXPIN

HOUSING:
2-PA6T

COLOR:
A-BLACK

PLATING:
A-ALL AU G

TERMIPOINT:
2-SMT

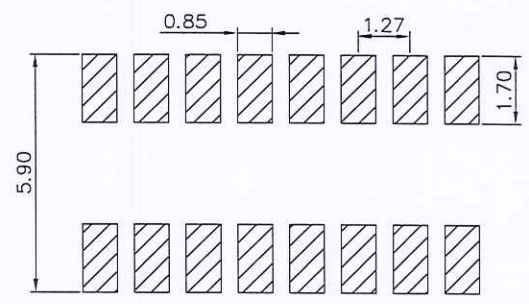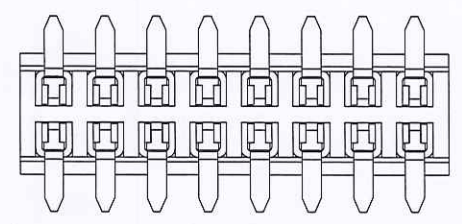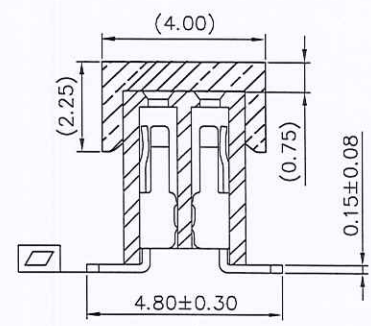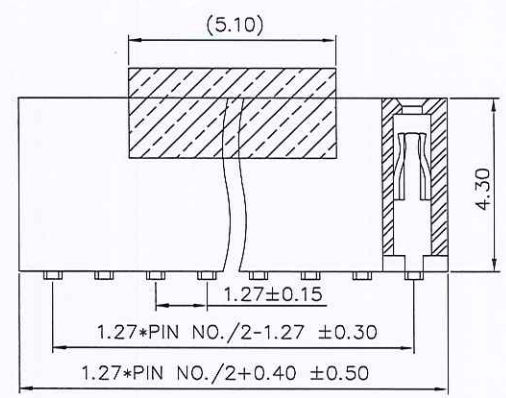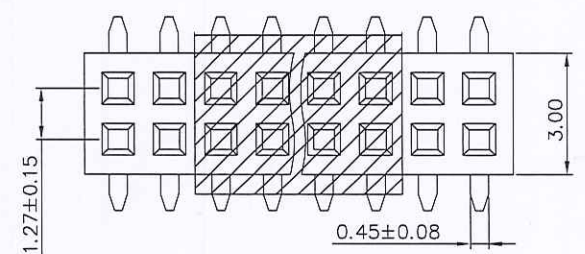

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	FH127643F0-2XX2XXX06			ENDE05
				0.0±0.35	X*REF±6°							
				UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	22.05.09	TITLE:		
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	LanXuan_Hou	22.05.09	1.27mm Pitch 双排排针 SMT H4.3 W3.0		REV: AO	SHEET: 1/1