
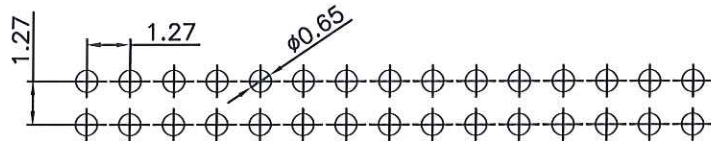
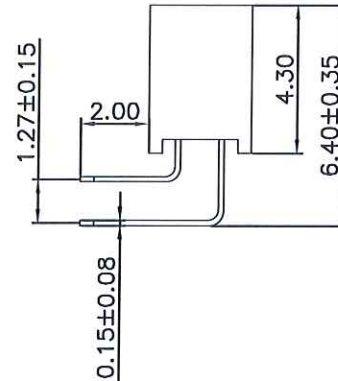
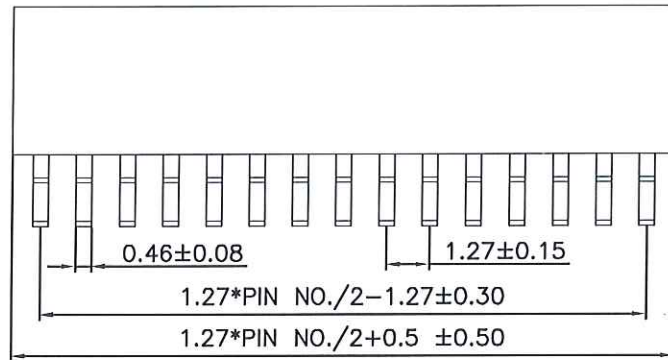


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

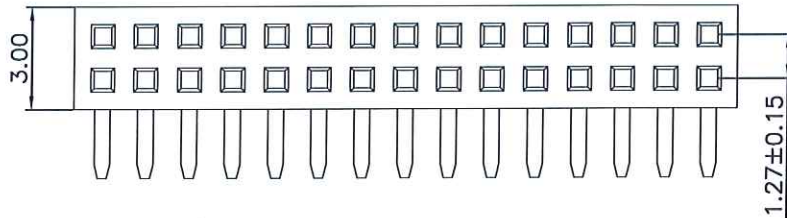

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: LCP,UL94V-0

1-2.CONTACTS: PHOSPHOR BRONZ Δ

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 1A

3-2.CONTACT RESISTANCE: 20 m Ω MAX

3-3.INSULATION RESISTANCE: 1000M Ω Min

3-4.DIELECTRIC WITHSTANDING : 300V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: TUBE

6.P/N:

SERIES NO: FH1276 43 F 9-2 XX 1 X X X 01
HEIGHT: 43: 4.3mm
MALE FEMALE: F-FEMALE
ANGLE: 9-90°
ROW NO: 2-DOUBLE ROW
PIN Q' PY: 02~80
HOUSING: 1-LCP HF
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 1-DIP



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28	LINEAR	APPROVED	25.1.7		FH127643F9-2XX1XXX01	ENDE05	
A1	UPDATE TERMINAL MATERIAL	25.01.06	ANGLES	DESIGNER	25.01.07				
			UNIT:mm	DRAWN	25.01.07		TITLE:		
			SIZE: A4				Pitch 1.27mm 90° 双排排母H4.3 W3.0 PC2.0		
			0.0±0.35						
			X'REF±6°						
			X'±3°						
			X'X' ±2°						

REV: A1 SHEET: 1/1