

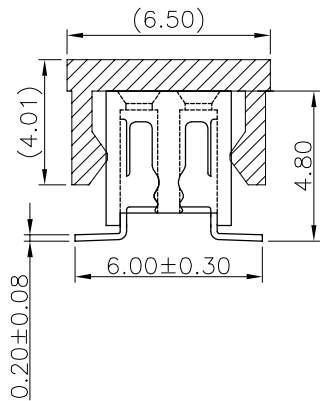
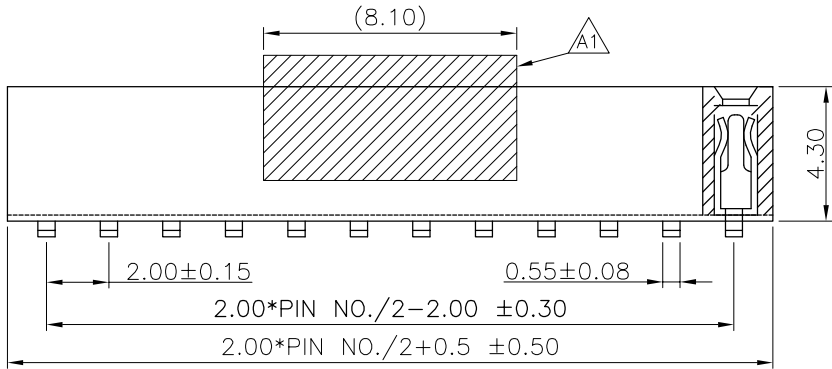


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

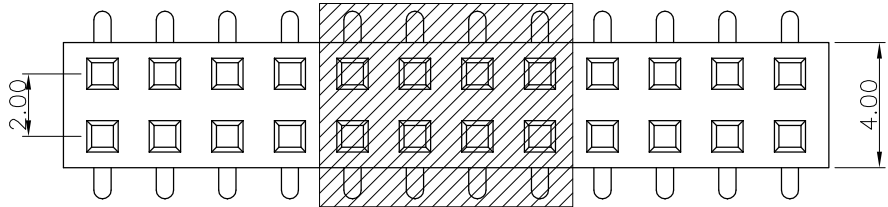

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH/TIN OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: REEL
6.P/N:

SERIES NO: FH2005 43 F 0-2 XX 2 X X X 01
HEIGHT: 43: 4.3mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q' PY: 02~80
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 2-SMT

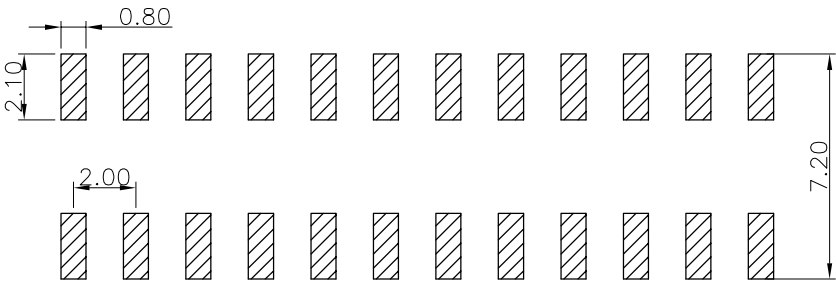

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH200543F0-2XX2XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
A0	NEW RELEASE	21.10.15		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	23.12.26	TITLE: Pitch 2.0mm 180° 双排 SMT U型排母 H4.3W4.0 SMT+CAP PC6.0		REV: A1 SHEET: 1/1
A1	CHANGE CAP	23.12.26		0.00±0.25	X°±3°	DESIGNER	Gao_Han	23.12.26			
				0.000±0.10	X°X'±2°	DRAWN	Gao_Han	23.12.26			