




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

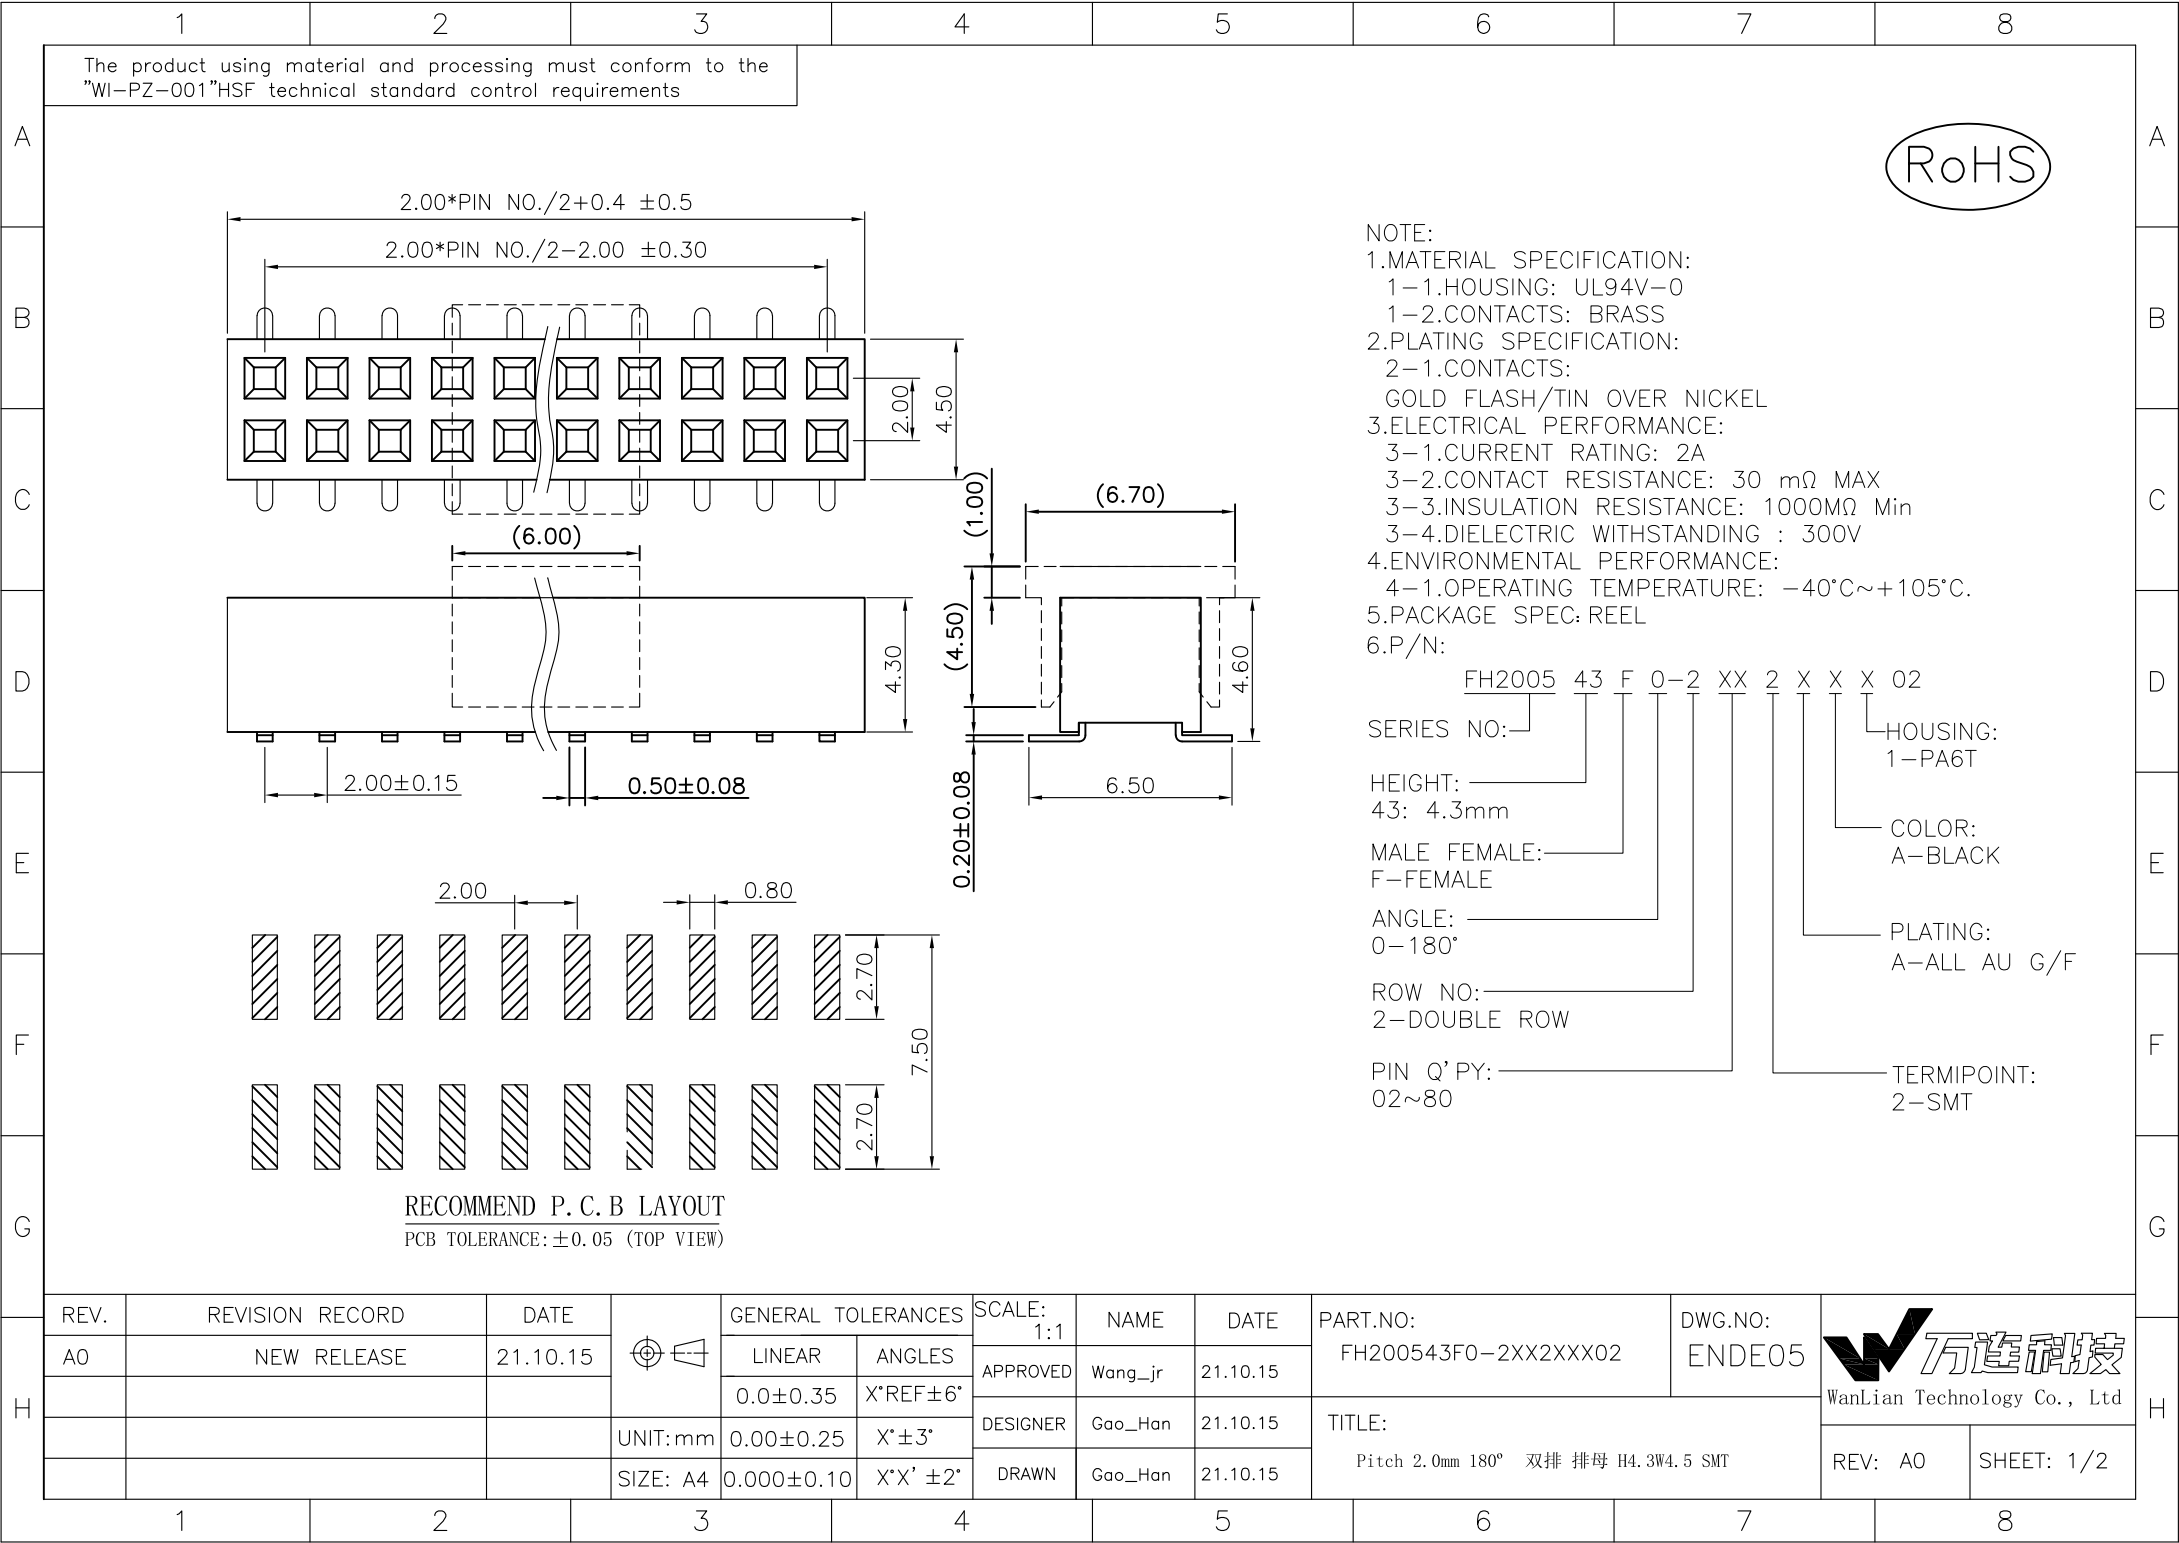

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH/TIN OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: REEL
6.P/N:
FH2005 43 F 0-2 XX 2 X X X 02
SERIES NO: _____
HEIGHT: _____
43: 4.3mm
MALE FEMALE: _____
F-FEMALE
ANGLE: _____
0-180°
ROW NO: _____
2-DOUBLE ROW
PIN Q'PY: _____
02~80
HOUSING:
1-PA6T
COLOR:
A-BLACK
PLATING:
A-ALL AU G/F
TERMIPOINT:
2-SMT

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH200543F0-2XX2XXX02	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
				0.0±0.35	X°REF±6°	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.0mm 180° 双排 排母 H4.3W4.5 SMT		REV: A0	SHEET: 1/2
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Gao_Han				
			SIZE: A4	0.000±0.10	X°X' ±2°							

