
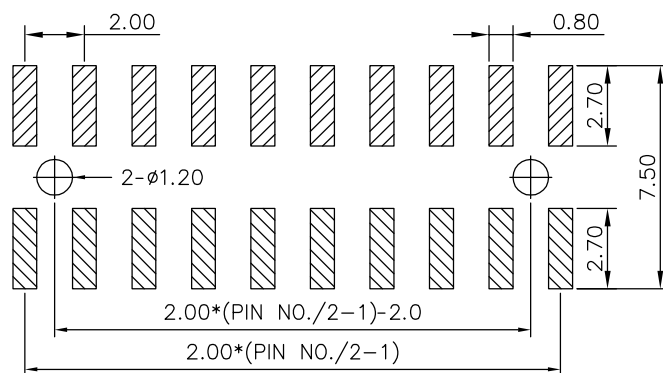

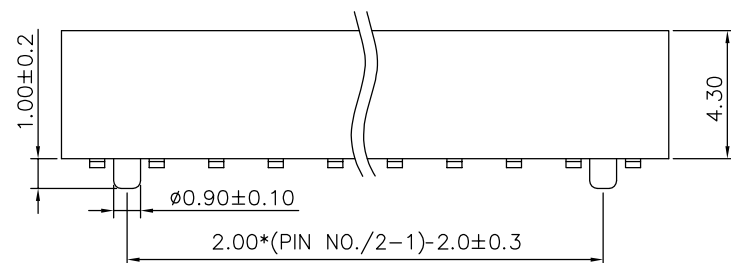


(RoHS)

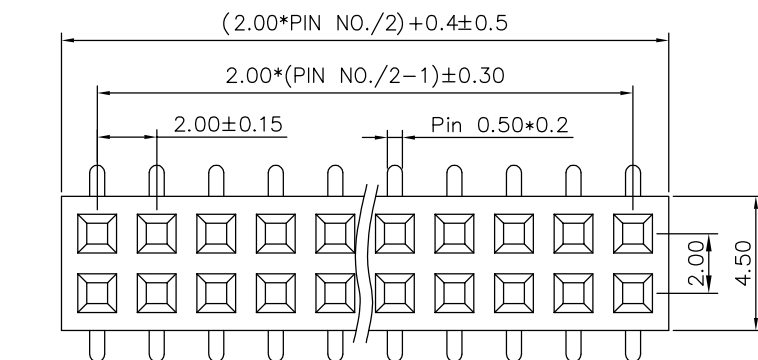

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: UL94V-0

1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH/TIN OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 2A

3-2.CONTACT RESISTANCE: 30 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 500V


4. ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$.

5. PACKAGE SPEC: REEL

6.P/N:

FH2005 43 F 0-2 XX 2 X X X 04
 SERIES NO: _____ HOUSING: 1-PA6T
 HEIGHT: _____
 43: 4.3mm
 MALE FEMALE: _____ COLOR: A-BLACK
 F-FEMALE
 ANGLE: _____ PLATING: A-ALL AU G/F
 0-180°
 ROW NO: _____
 2-DOUBLE ROW
 PIN Q' PY: _____ TERMIPOINT: 2-SMT
 02~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH200543F0-2XX2XXX04	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.19			
				0.0±0.35	X*REF±6°						
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Gao_Han	22.10.19	TITLE: Pitch 2.0mm 180° 双排 排母 带柱 H4.3W4.5 SMT		
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LX_HOU		22.10.19	
										REV: AO	SHEET: 1/1