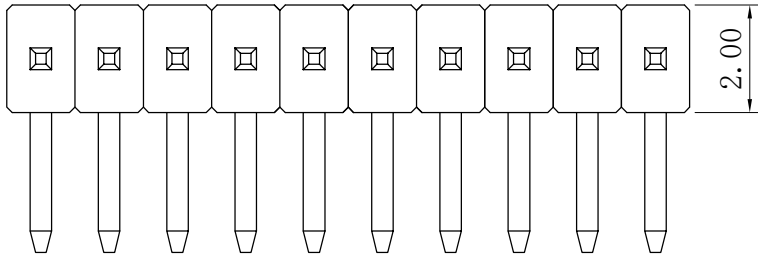
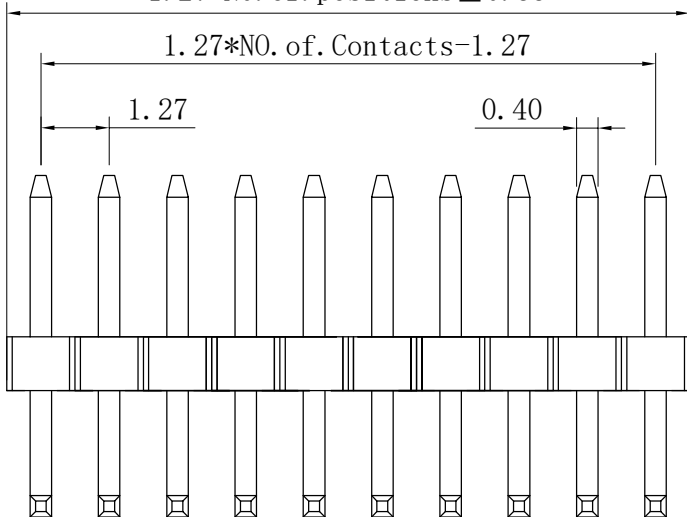
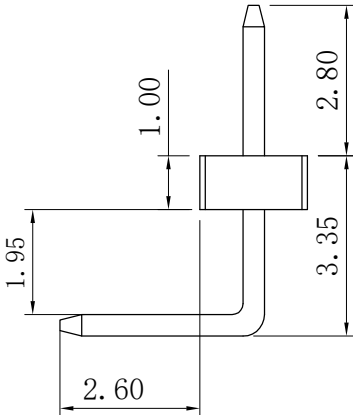



	1	2	3	4	5	6	7	8							
A	The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements														
B	RoHS 				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PA6T,UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.2KGF/pin min 3-2.DURABILITY: 100 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 300V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 300V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: TRAY 7.P/N:										
C	1.27*N0. of positions±0.35 1.27*N0. of Contacts-1.27 1.27 0.40 				PH1276 10 M 0-1 XX 1 X X X 02 SERIES NO: HEIGHT: 10: 1.0mm MALE FEMALE: M-MALE ANGLE: 0-180° ROW NO: 1-SINGLE ROW PIN Q'PY: 02~40 HOUSING: 1-PA6T COLOR: A-BLACK PLATING: A-ALL AU G/F 1-G/F C-BRIGHT TIN TERMIPOINT: 1-DIP 										
D															
E															
F	1.27 Ø0.7 														
G	RECOMMENDED P.C.B LAYOUT P.C.B TOLERANCE:±0.05														
H	REV.	REVISION RECORD	DATE	 UNIT:mm SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd			
	AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	PH127610M0-1XX1XXX02					
					0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 1.27mm 90° 单排 DIP 排针 塑高1.0 PC:2.6					
					0.00±0.25	X'±3°	DRAWN	Zijun_Huang	21.11.17	REV: A0	SHEET: 1/1				
	1	2	3	4	5	6	7	8							