
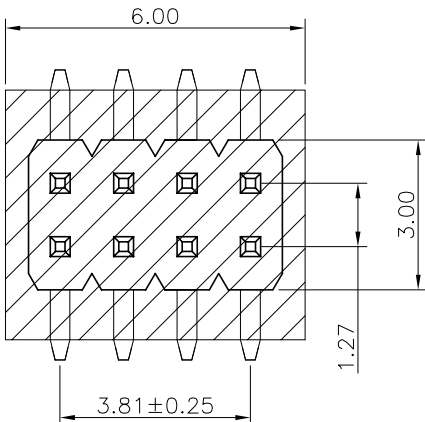
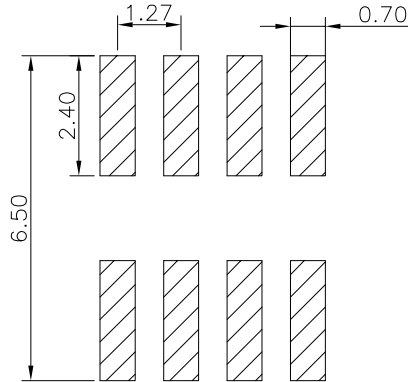
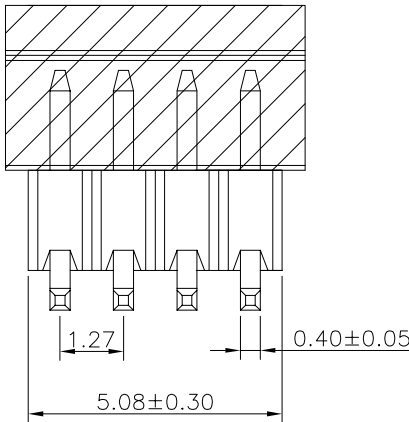


	1	2	3	4	5	6	7	8					
	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements												
A	RoHS+HF												
B						NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.2KGF/pin min 3-2.DURABILITY: 100 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 300V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 300V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: REEL 7.P/N: PH1276 20 M 0-2 XX 2 X X X 03 SERIES NO: _____ HEIGHT: _____ 20: 2.0mm MALE FEMALE: _____ M-MALE ANGLE: _____ 0-180° ROW NO: _____ 2-DOUBLE ROW PIN Q' PY: _____ 08PIN HOUSING: 1-PA6T COLOR: A-BLACK PLATING: A-ALL AU G/F TERMIPOINT: 2-SMT							
C													
D				RECOMMENDED P. C. B LAYOUT P. C. B TOLERANCE: ±0.05									
E													
F													
G													
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
	AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH127620M0-2XX2XXX03	ENDE05		
				UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.05.09	TITLE: 1.27 Double-Row Pin header SMT TYP(H2.0)		REV: A0	SHEET: 1/2
					0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.05.09				
				SIZE: A4	0.000±0.10	X°X' ±2°							
	1	2	3	4	5	6	7	8					

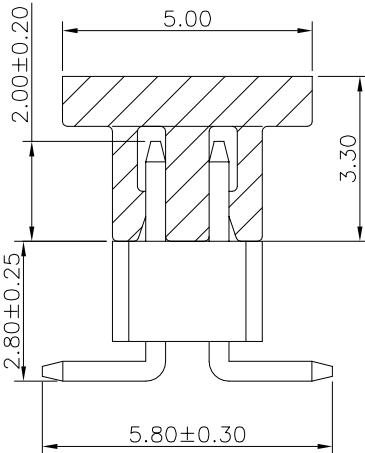