



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

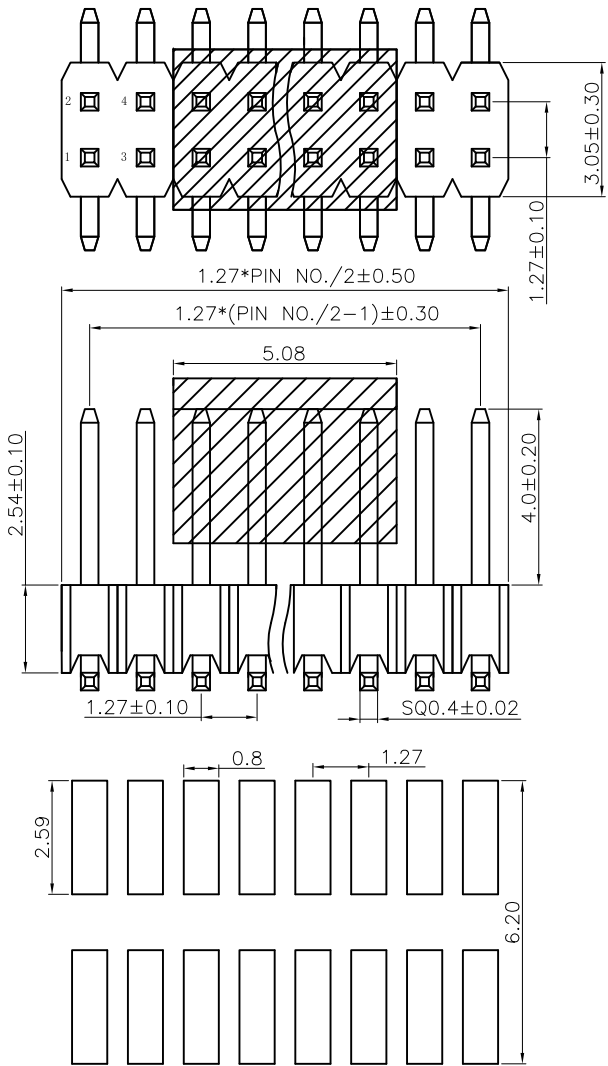

Recommended PCB layout

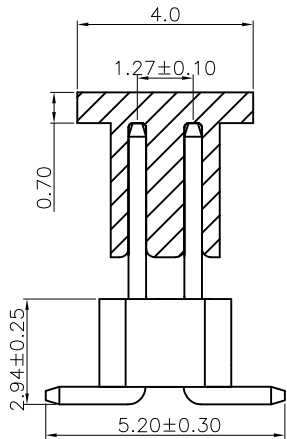

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A AC/DC
RATED VOLTAGE : 300V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: REEL
6.P/N:

PH1276 20 M 0-2 XX 2 X X X 04
SERIES NO: HOUSING: 1-PA9T
HEIGHT: 25: 2.54mm
MALE FEMALE: M-MALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q' PY: 04~100
COLOR: A-BLACK
PLATING: A-ALL AU G/F
1-G/F
C-BRIGHT TIN
TERMIPOINT: 2-SMT

H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd			
	AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH127620M0-2XX2XXX04	ENDE05				
					0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.05.09	TITLE:					
				UNIT:mm	0.00±0.25	X°±3°				Pitch 1.27mm 180° 双排 SMT+CAP					
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.05.09	H2.54 W3.4 双塑排针 PA4.0 PC5.2		REV: A0	SHEET: 1/1		
1		2		3		4		5		6		7		8	