The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

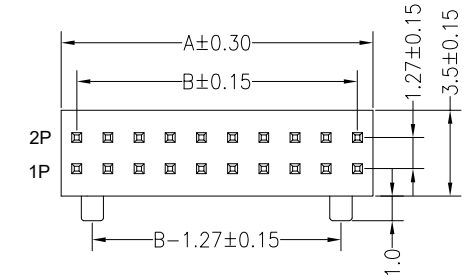

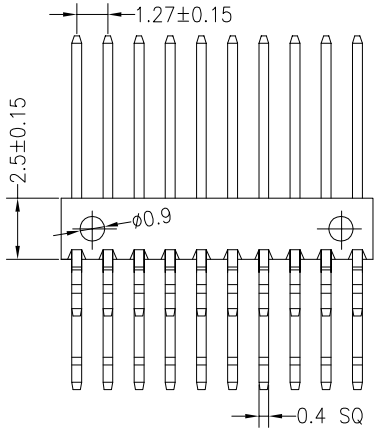

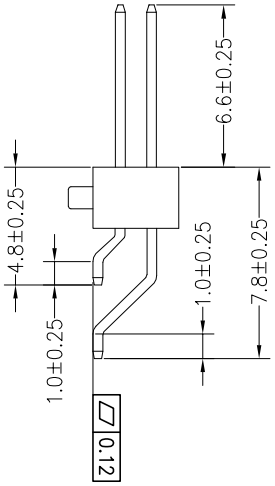

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

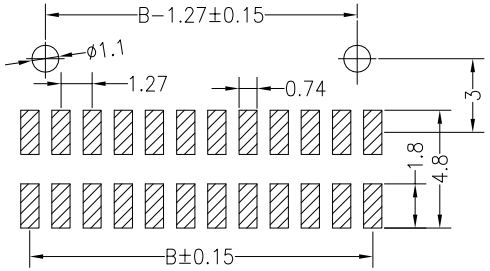

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA9T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 0.2kgf/PIN MIN
3-2.DURABILITY: 100 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
RATED VOLTAGE : 300V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC：REEL
6.P/N:

PH1276 25 M 9-2 XX 2 X X X 01

- SERIES NO: PH1276
- HEIGHT: 25: 2.5mm
- MALE FEMALE: M-MALE
- ANGLE: 9-90°
- ROW NO: 2-DOUBLE ROW
- PIN Q'PY: 02~80
- TERMIPOINT: 2-SMT
- PLATING: A-ALL AU G/F, 1-G/F, C-BRIGHT TIN
- COLOR: A-BLACK
- HOUSING: 1-PA6T

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.10.15

UNIT: mm
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	21.10.15
DESIGNER	Gao_Han	21.10.15
DRAWN	Gao_Han	21.10.15

PART.NO: PH127625M9-2XX2XXX01

DWG.NO: ENDE05

TITLE: Pitch 1.27mm 90°MX 双排 卧贴 排针

万连科技 WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1