
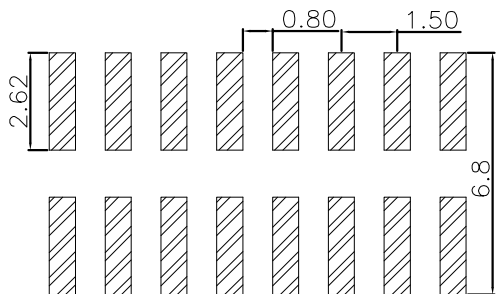
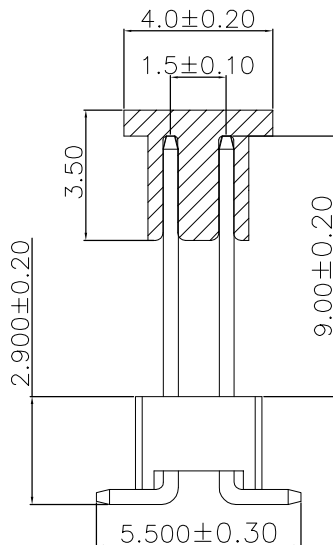
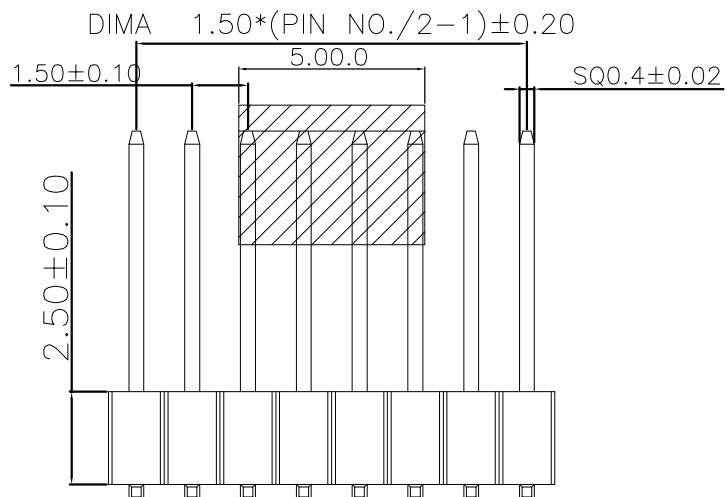


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

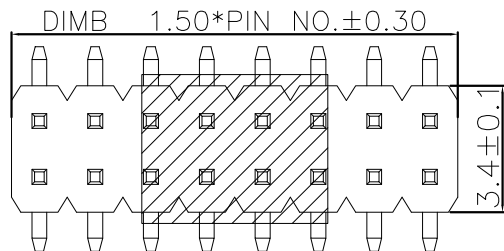

Recommended PCB layout

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA9T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Matte-TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.35kgf/PIN MIN
 - 3-2.DURABILITY: 100 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1A
 - RATED VOLTAGE : 500V AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: REEL/TUBE
- 6.P/N:

PH1502 25 M 0-2 XX 2 X X X XX

SERIES NO: _____

HEIGHT: _____
25: 2.5mm

MALE FEMALE: _____
M-MALE

ANGLE: _____
0-180°

ROW NO: _____
2-DOUBLE ROW

PIN Q'PY: _____
02~20

TERMPOINT: _____
2-SMT

PACKAGE SPEC:
01-TUBE(不翻) (不翻)
02-REEL (翻)

HOUSING:
1-PA9T

COLOR:
A-BLACK
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN

Ordering Information & Dimensions


PIN NO.	DIMENSION		PIN NO.	DIMENSION		PIN NO.	DIMENSION	
	DIMA	DIMB		DIMA	DIMB		DIMA	DIMB
			2*14	19.5	21.0	2*27	42.0	43.5
2*2	1.5	3.0	2*15	21.0	22.5	2*28	43.5	45.0
2*3	3.0	4.5	2*16	22.5	24.0	2*29	45.0	46.5
2*4	4.5	6.0	2*17	24.0	25.5	2*30	46.5	48.0
2*5	6.0	7.5	2*18	25.5	27.0	2*31	48.0	49.5
2*6	7.5	9.0	2*19	27.0	28.5	2*32	49.5	51.0
2*7	9.0	10.5	2*20	28.5	30.0	2*33	51.0	52.5
2*8	10.5	12.0	2*21	30.0	34.5	2*34	52.5	54.0
2*9	12.0	13.5	2*22	34.5	36.0	2*35	54.0	55.5
2*10	13.5	15.0	2*23	36.0	37.5	2*36	55.5	57.0
2*11	15.0	16.5	2*24	37.5	39.0			
2*12	16.5	18.0	2*25	39.0	40.5			
2*13	18.0	19.5	2*26	40.5	42.0			

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO: PH150225M0-2XX2XXXXXX	DWG.NO: ENDE05	TITLE: Pitch 1.50mm 180° 双排 SMT+CAP 单塑排针 PC5.5	REV: A1	SHEET: 1/2
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	APPROVED	Wang_jr					
A1	Update package quantity	23.04.14		0.00±0.25	X'±3'		DESIGNER	Gao_Han	23.04.14				
			SIZE: A4	0.000±0.10	X'X' ±2'		DRAWN	LX_HOU	23.04.14				




WanLian Technology Co., Ltd


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

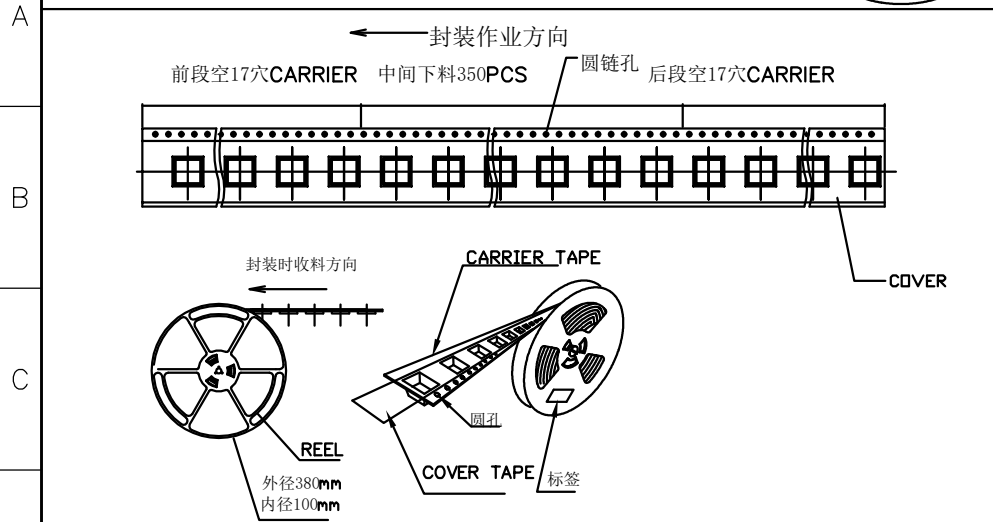

W	R(卷)/C(箱)	pcs/R(卷)
W24	12	350
W32	9	350
W44	7	350
W56	5	350
W72	4	350

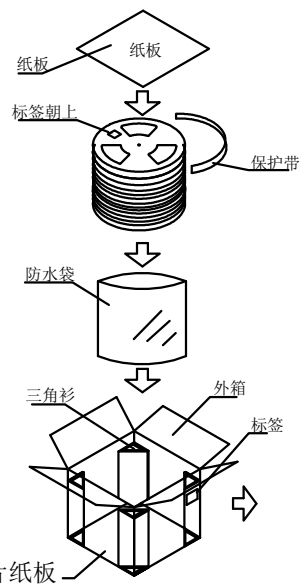

- 封装规范:
1. 外箱底部先垫一片纸板
 2. 外箱四个内角各放置一个角衫
 3. REEL标签一律朝上
 4. 把卷装好的产品平放防水袋
 5. 将包装好的产品放进外箱
 6. 上层放一片纸板
 7. 标签贴于箱外

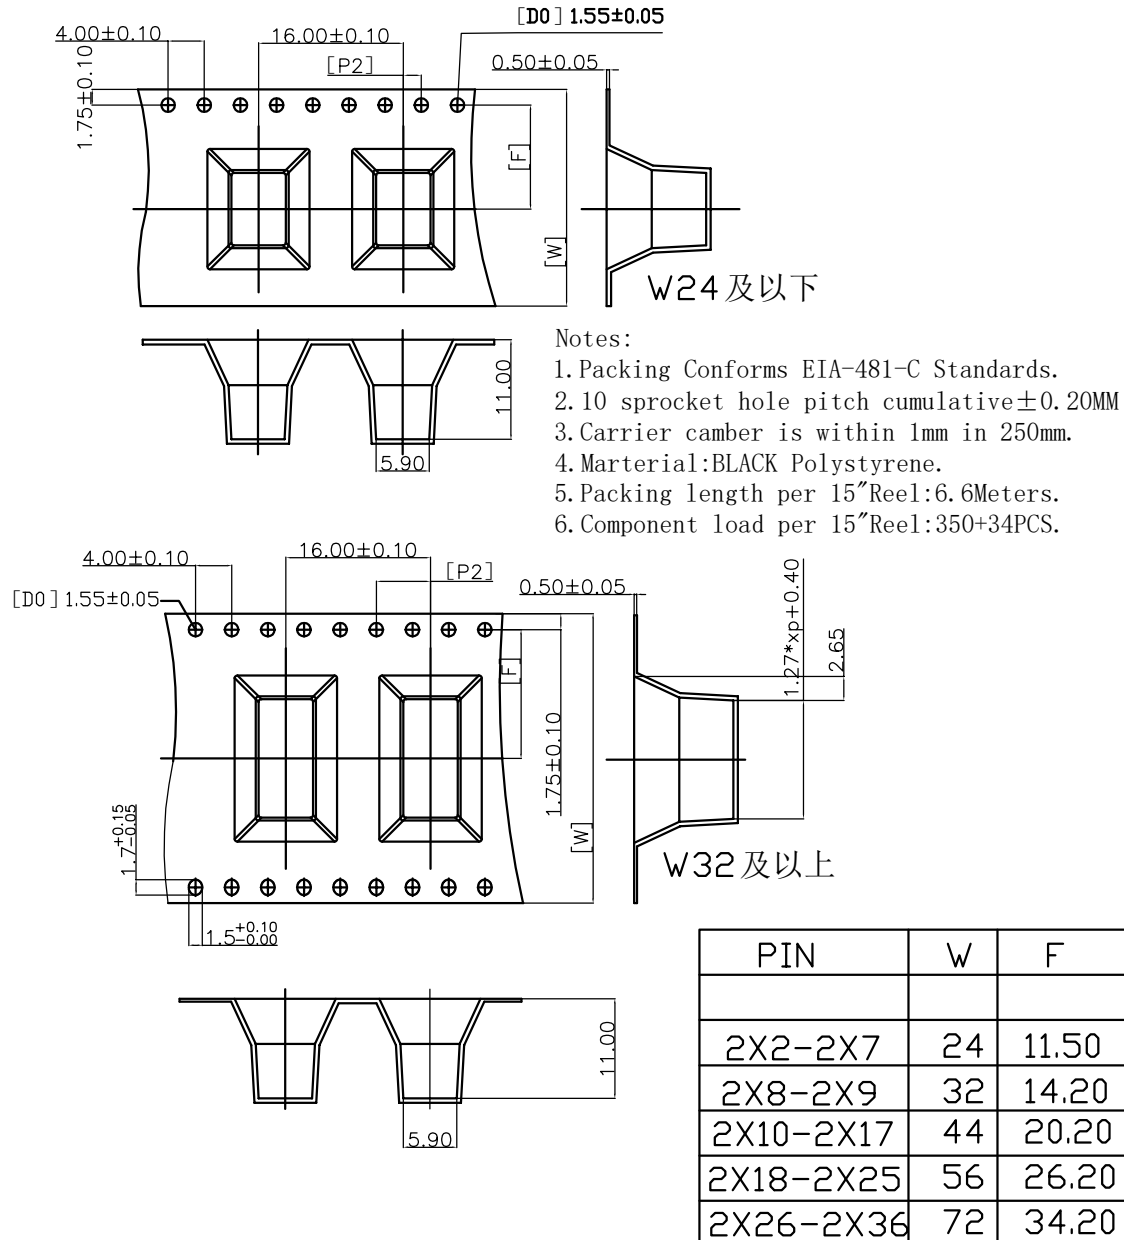

- Notes:
1. Packing Conforms EIA-481-C Standards.
 2. 10 sprocket hole pitch cumulative ±0.20MM
 3. Carrier camber is within 1mm in 250mm.
 4. Material: BLACK Polystyrene.
 5. Packing length per 15" Reel: 6.6Meters.
 6. Component load per 15" Reel: 350+34PCS.

PIN	W	F
2X2-2X7	24	11.50
2X8-2X9	32	14.20
2X10-2X17	44	20.20
2X18-2X25	56	26.20
2X26-2X36	72	34.20

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.10.15	LINEAR	1:1	Wang_jr	23.04.14	PH150225M0-2XX2XXXXX	ENDE05
A1	Update package quantity	23.04.14	ANGLES		Gao_Han	23.04.14		
			0.0±0.35		LX_HOU	23.04.14		
			0.00±0.25				TITLE:	
			0.000±0.10				Pitch 1.50mm 180° 双排 SMT+CAP 单塑排针 PC5.5	



REV: A1 SHEET: 2/2