




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

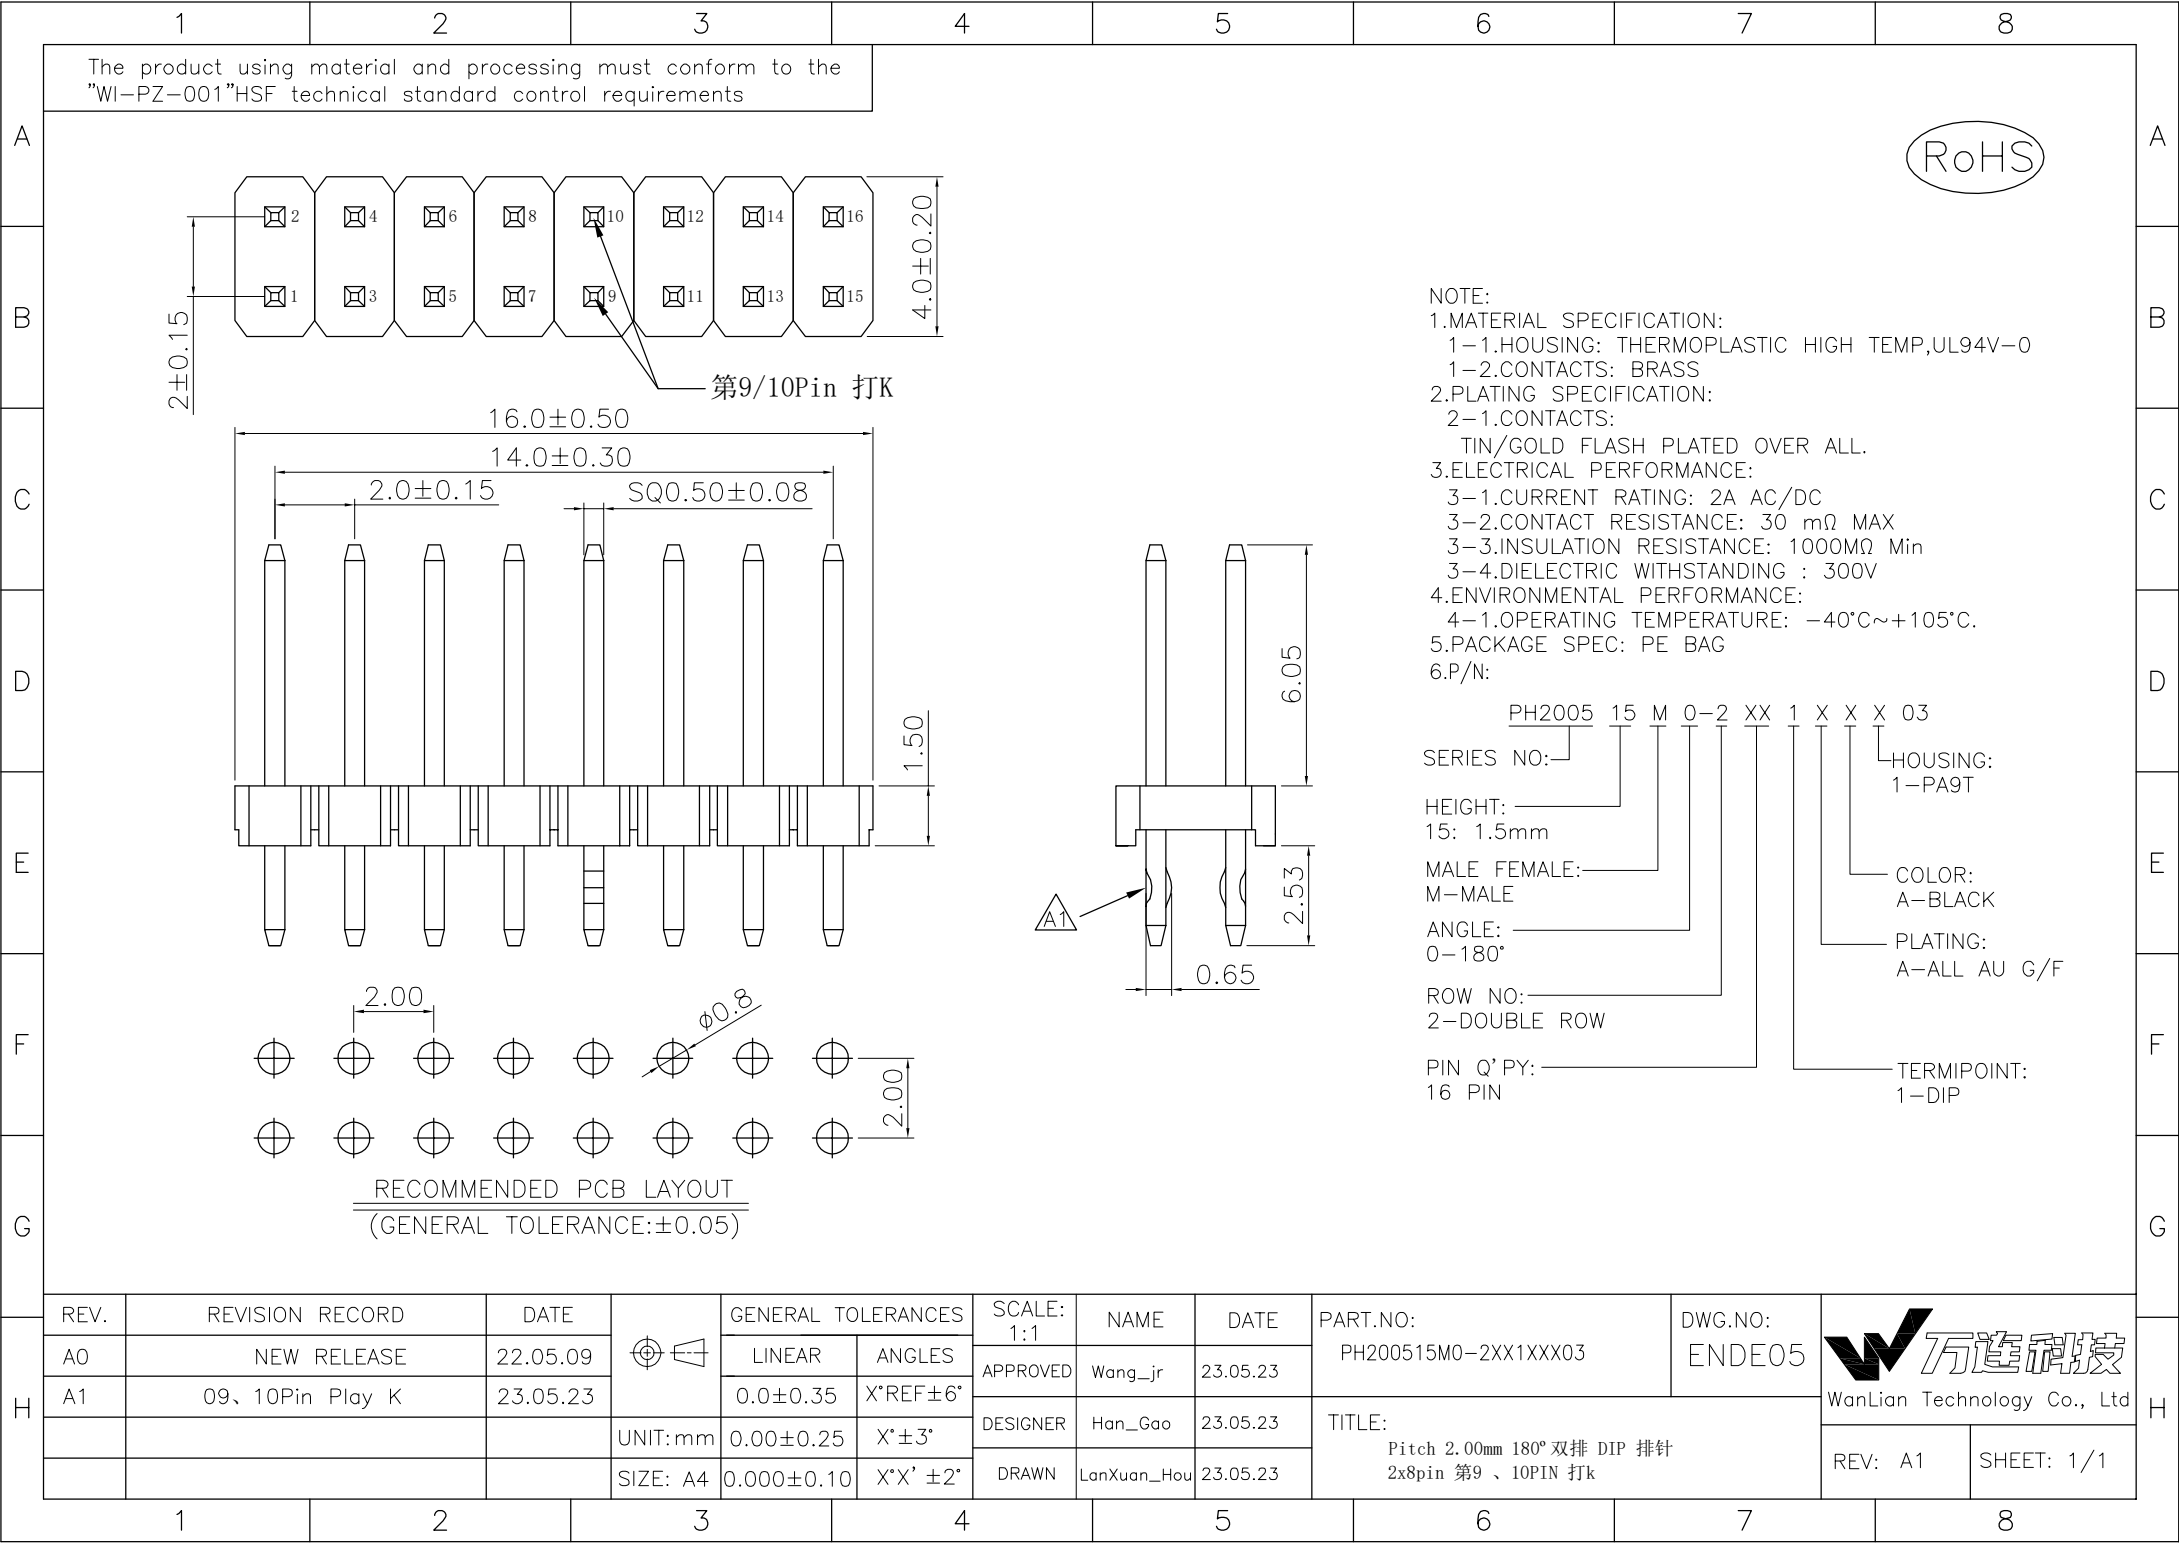

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A AC/DC
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:
PH2005 15 M 0-2 XX 1 X X X 03
SERIES NO: 15 M 0-2 XX 1 X X X 03
HEIGHT: 15: 1.5mm
MALE FEMALE: M-MALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 16 PIN
HOUSING: 1-PA9T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 1-DIP

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200515M0-2XX1XXX03	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
A0	NEW RELEASE	22.05.09		0.0±0.35	X'REF±6°	APPROVED	Wang_jr	23.05.23	Pitch 2.00mm 180° 双排 DIP 排针 2x8pin 第9、10PIN 打K		REV: A1 SHEET: 1/1
A1	09、10Pin Play K	23.05.23		0.00±0.25	X'±3°	DESIGNER	Han_Gao	23.05.23			
				UNIT:mm	0.000±0.10	DRAWN	LanXuan_Hou	23.05.23			