
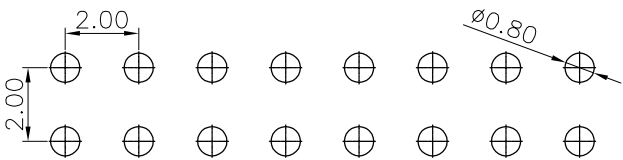
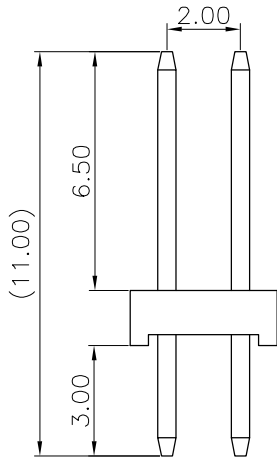
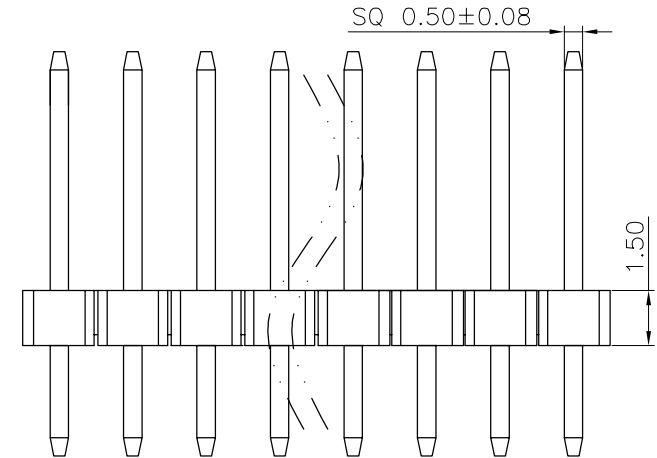


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

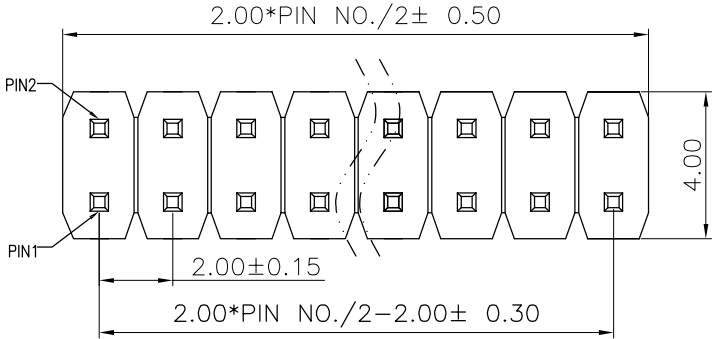

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:
PH2005 15 M 0-2 XX 1 X X X 06
SERIES NO: HOUSING: 1-PA6T
HEIGHT: 15: 1.5mm
MALE FEMALE: M-MALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q' PY: 02~80
PLATING: A-ALL AU G/F
1-G/F
C-BRIGHT TIN
TERMIPOINT: 1-DIP

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:		DWG.NO:	 WanLian Technology Co., Ltd		H					
	AO		NEW RELEASE		22.05.09			LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH200515M0-2XX1XXX06		ENDE05								
								0.0±0.35	X°REF±6°														
								UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.05.09	TITLE:									
								SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.05.09	Pitch 2.00mm 180° 双排 DIP 单塑排针 L=11		REV: A0	SHEET: 1/1						
1			2			3			4			5			6			7			8		