

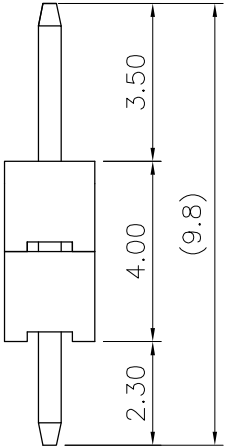
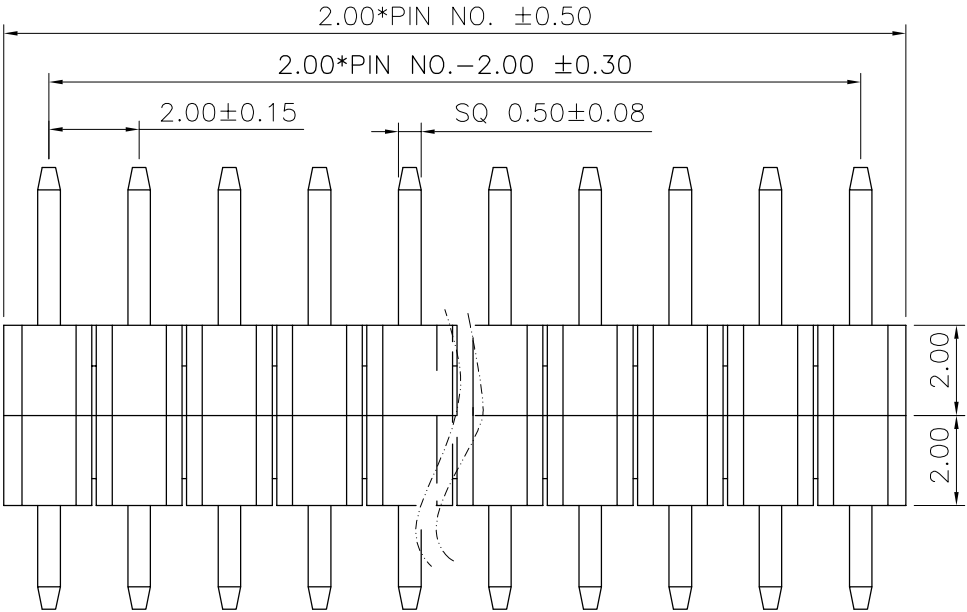


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

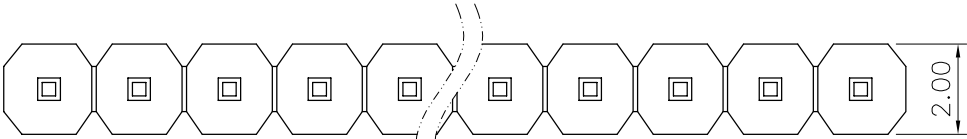

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: Pe bag
6.P/N:
PH2005 20 M 0-1 XX 1 X X X 09
SERIES NO: 20 M 0-1 XX 1 X X X 09
HEIGHT: 20: 2.0mm
MALE FEMALE: M-MALE
ANGLE: 0-180 °
ROW NO: 1-SINGLE ROW
PIN Q'PY: 02~40
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 1-DIP

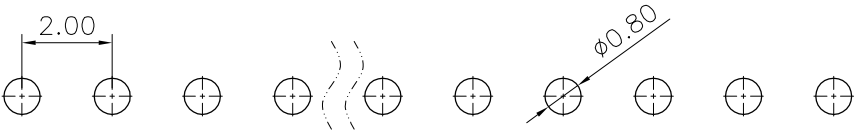

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-1XX1XXX09	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
				0.0±0.35	X*REF±6°	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.00mm 180° 单排 DIP 双塑排针 L=9.8			
				UNIT:mm	0.00±0.25	X*±3°	DRAWN	Gao_Han		21.10.15		
			SIZE: A4	0.000±0.10	X*X' ±2°						REV: A0	SHEET: 1/1