The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

ROHS

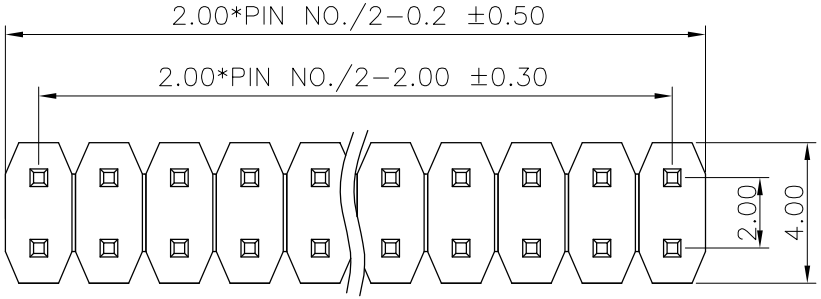

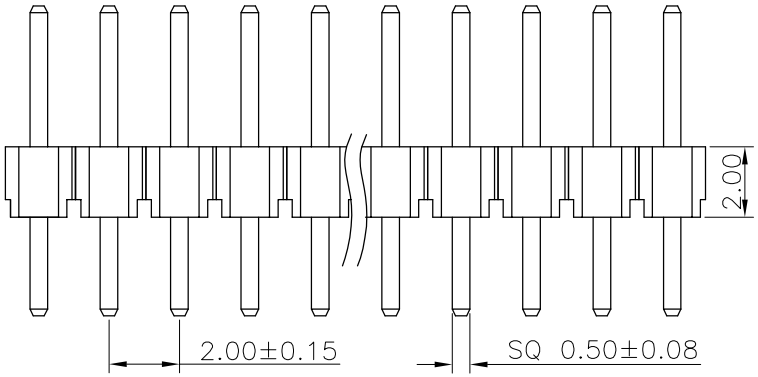



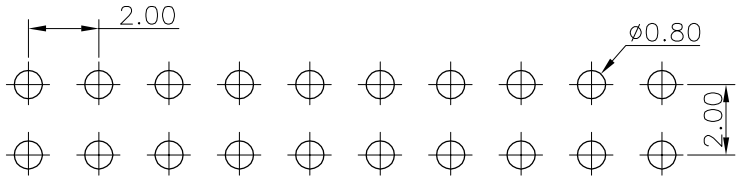

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:
1.MATERIAL SPECIFICATION:
  1-1.HOUSING: UL94V-0
  1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
  2-1.CONTACTS:
  GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
  3-1.CURRENT RATING: 2A
  3-2.CONTACT RESISTANCE: 30 mΩ MAX
  3-3.INSULATION RESISTANCE: 1000MΩ Min
  3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
  4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

PH2005 20 M 0-2 XX 1 X X X 19

- SERIES NO: PH2005
- HEIGHT: 20: 2.0mm
- MALE FEMALE: M-MALE
- ANGLE: 0-180°
- ROW NO: 2-DOUBLE ROW
- PIN Q'PY: 04~80
- TERMIPOINT: 1-DIP
- PLATING: A-ALL AU G/F
- COLOR: A-BLACK
- HOUSING: 1-PA9T

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	22.10.15

UNIT: mm

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	22.10.15
DESIGNER	Gao_Han	22.10.15
DRAWN	LX_HOU	22.10.15

PART.NO: PH200520M0-2XX1XXX19

DWG.NO: ENDE05

TITLE: Pitch 2.00mm 180° 双排 DIP 排针打内K H2.0 PA11 PC2.8

万连科技 WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1