
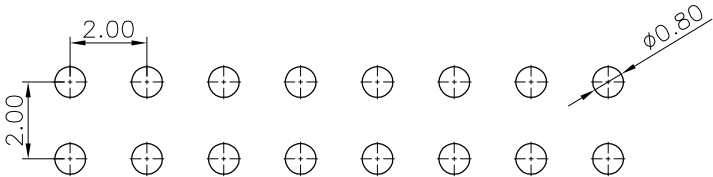
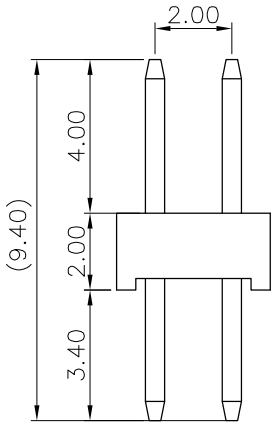
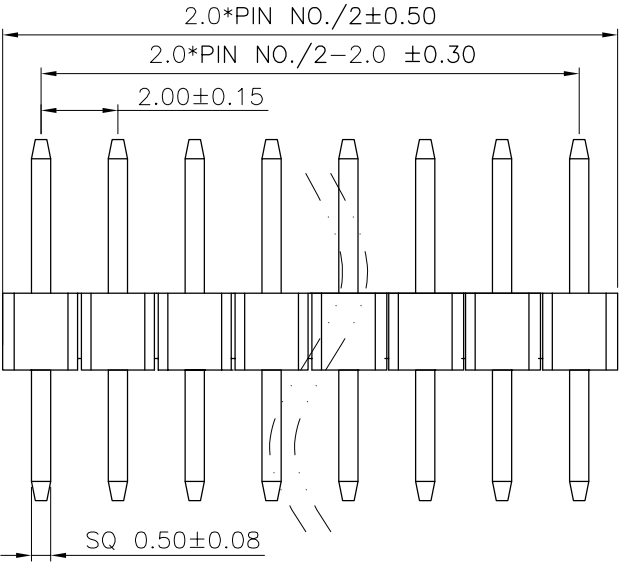


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

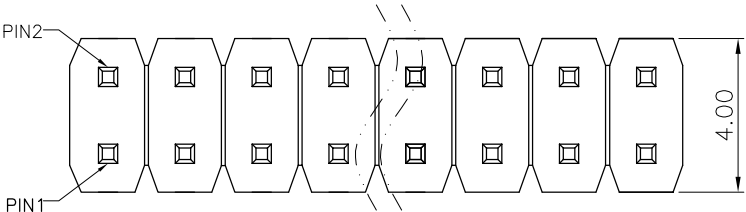

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH/TIN OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.P/N:

PH2005 20 M 0-2 XX 1 X X X 23
SERIES NO: 1-PA6T
HEIGHT: 20: 2.0mm
MALE FEMALE: M-MALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 04~80
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 1-DIP

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX1XXX23		DWG.NO: ENDE05		 WanLian Technology Co., Ltd		H				
	AO		NEW RELEASE		21.10.15			LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15											
							0.0±0.35	X°REF±6°															
							UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.00mm 180° 双排 DIP 单塑排针 L=9.4										
							SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Gao_Han	21.10.15											
1			2			3			4			5			6			7			8		