
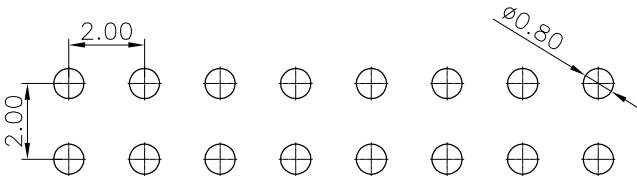
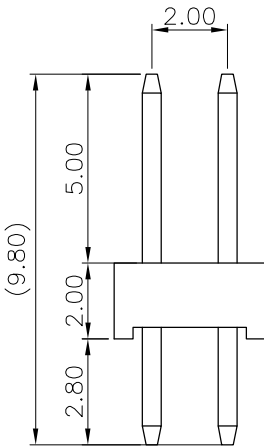
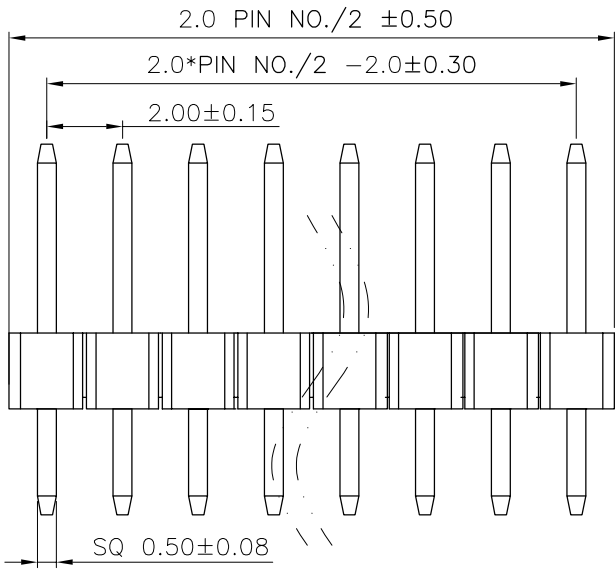


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

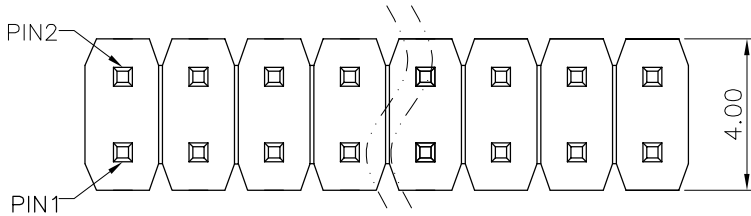

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH/TIN OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.P/N:
PH2005 20 M 0-2 XX 1 X X X 25
SERIES NO: HOUSING: 1-PA6T
HEIGHT: 20: 2.0mm COLOR: A-BLACK
MALE FEMALE: M-MALE PLATING: A-ALL AU G/F
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 02~80 TERMIPOINT: 1-DIP

REV.	REVISION RECORD		DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX1XXX25	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
	A0	NEW RELEASE			LINEAR	ANGLES							
					0.0±0.35	X'REF±6°	APPROVED	Wang_jr	21.10.15				
					0.00±0.25	X'±3°	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.00mm 180° 双排 DIP 单塑排针 L=9.8		REV: A0	SHEET: 1/1
					0.000±0.10	X'X' ±2°	DRAWN	Gao_Han	21.10.15				
				UNIT:mm									
				SIZE: A4									
	1	2	3	4	5	6	7	8					