

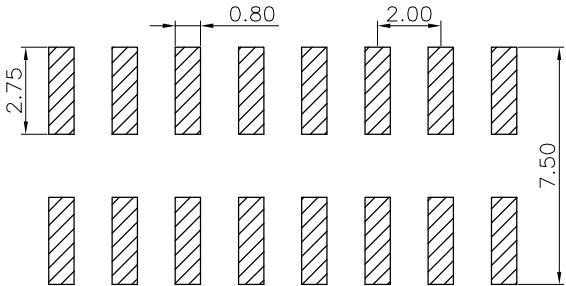
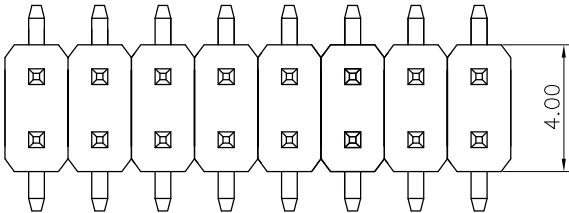


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

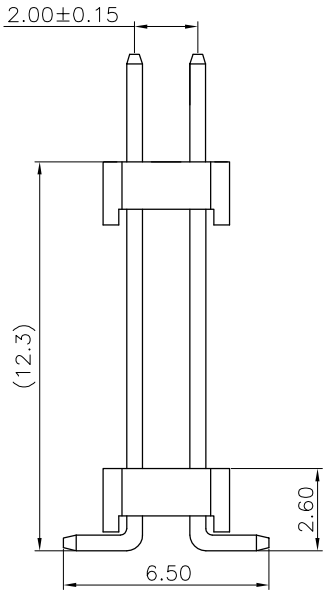

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

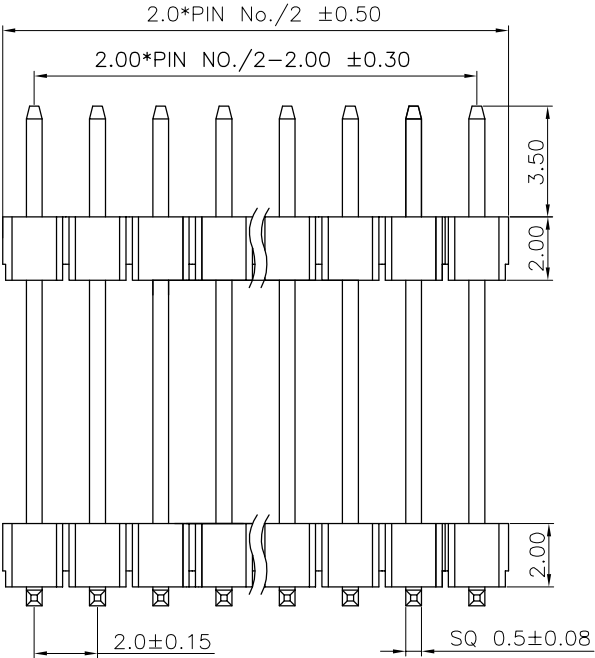

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A AC/DC
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: TUBE
6.P/N:
PH2005 20 M 0-2 XX 2 X X X 04
SERIES NO: HOUSING: 1-PA9T
HEIGHT: 20: 2.0mm
MALE FEMALE: COLOR: A-BLACK
M-MALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PLATING: A-ALL AU G/F
1-G/F
C-BRIGHT TIN
PIN Q'PY: TERMIPOINT: 2-SMT
02~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX2XXX04	DWG.NO: ENDE05	
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09			
				0.0±0.35	X°REF±6°						
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.05.09	TITLE: Pitch 2.00mm 180° 双排 双塑 SMT 排针 PC:6.5 管装		
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou		22.05.09	
										WanLian Technology Co., Ltd	
										REV: A0	SHEET: 1/1