




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

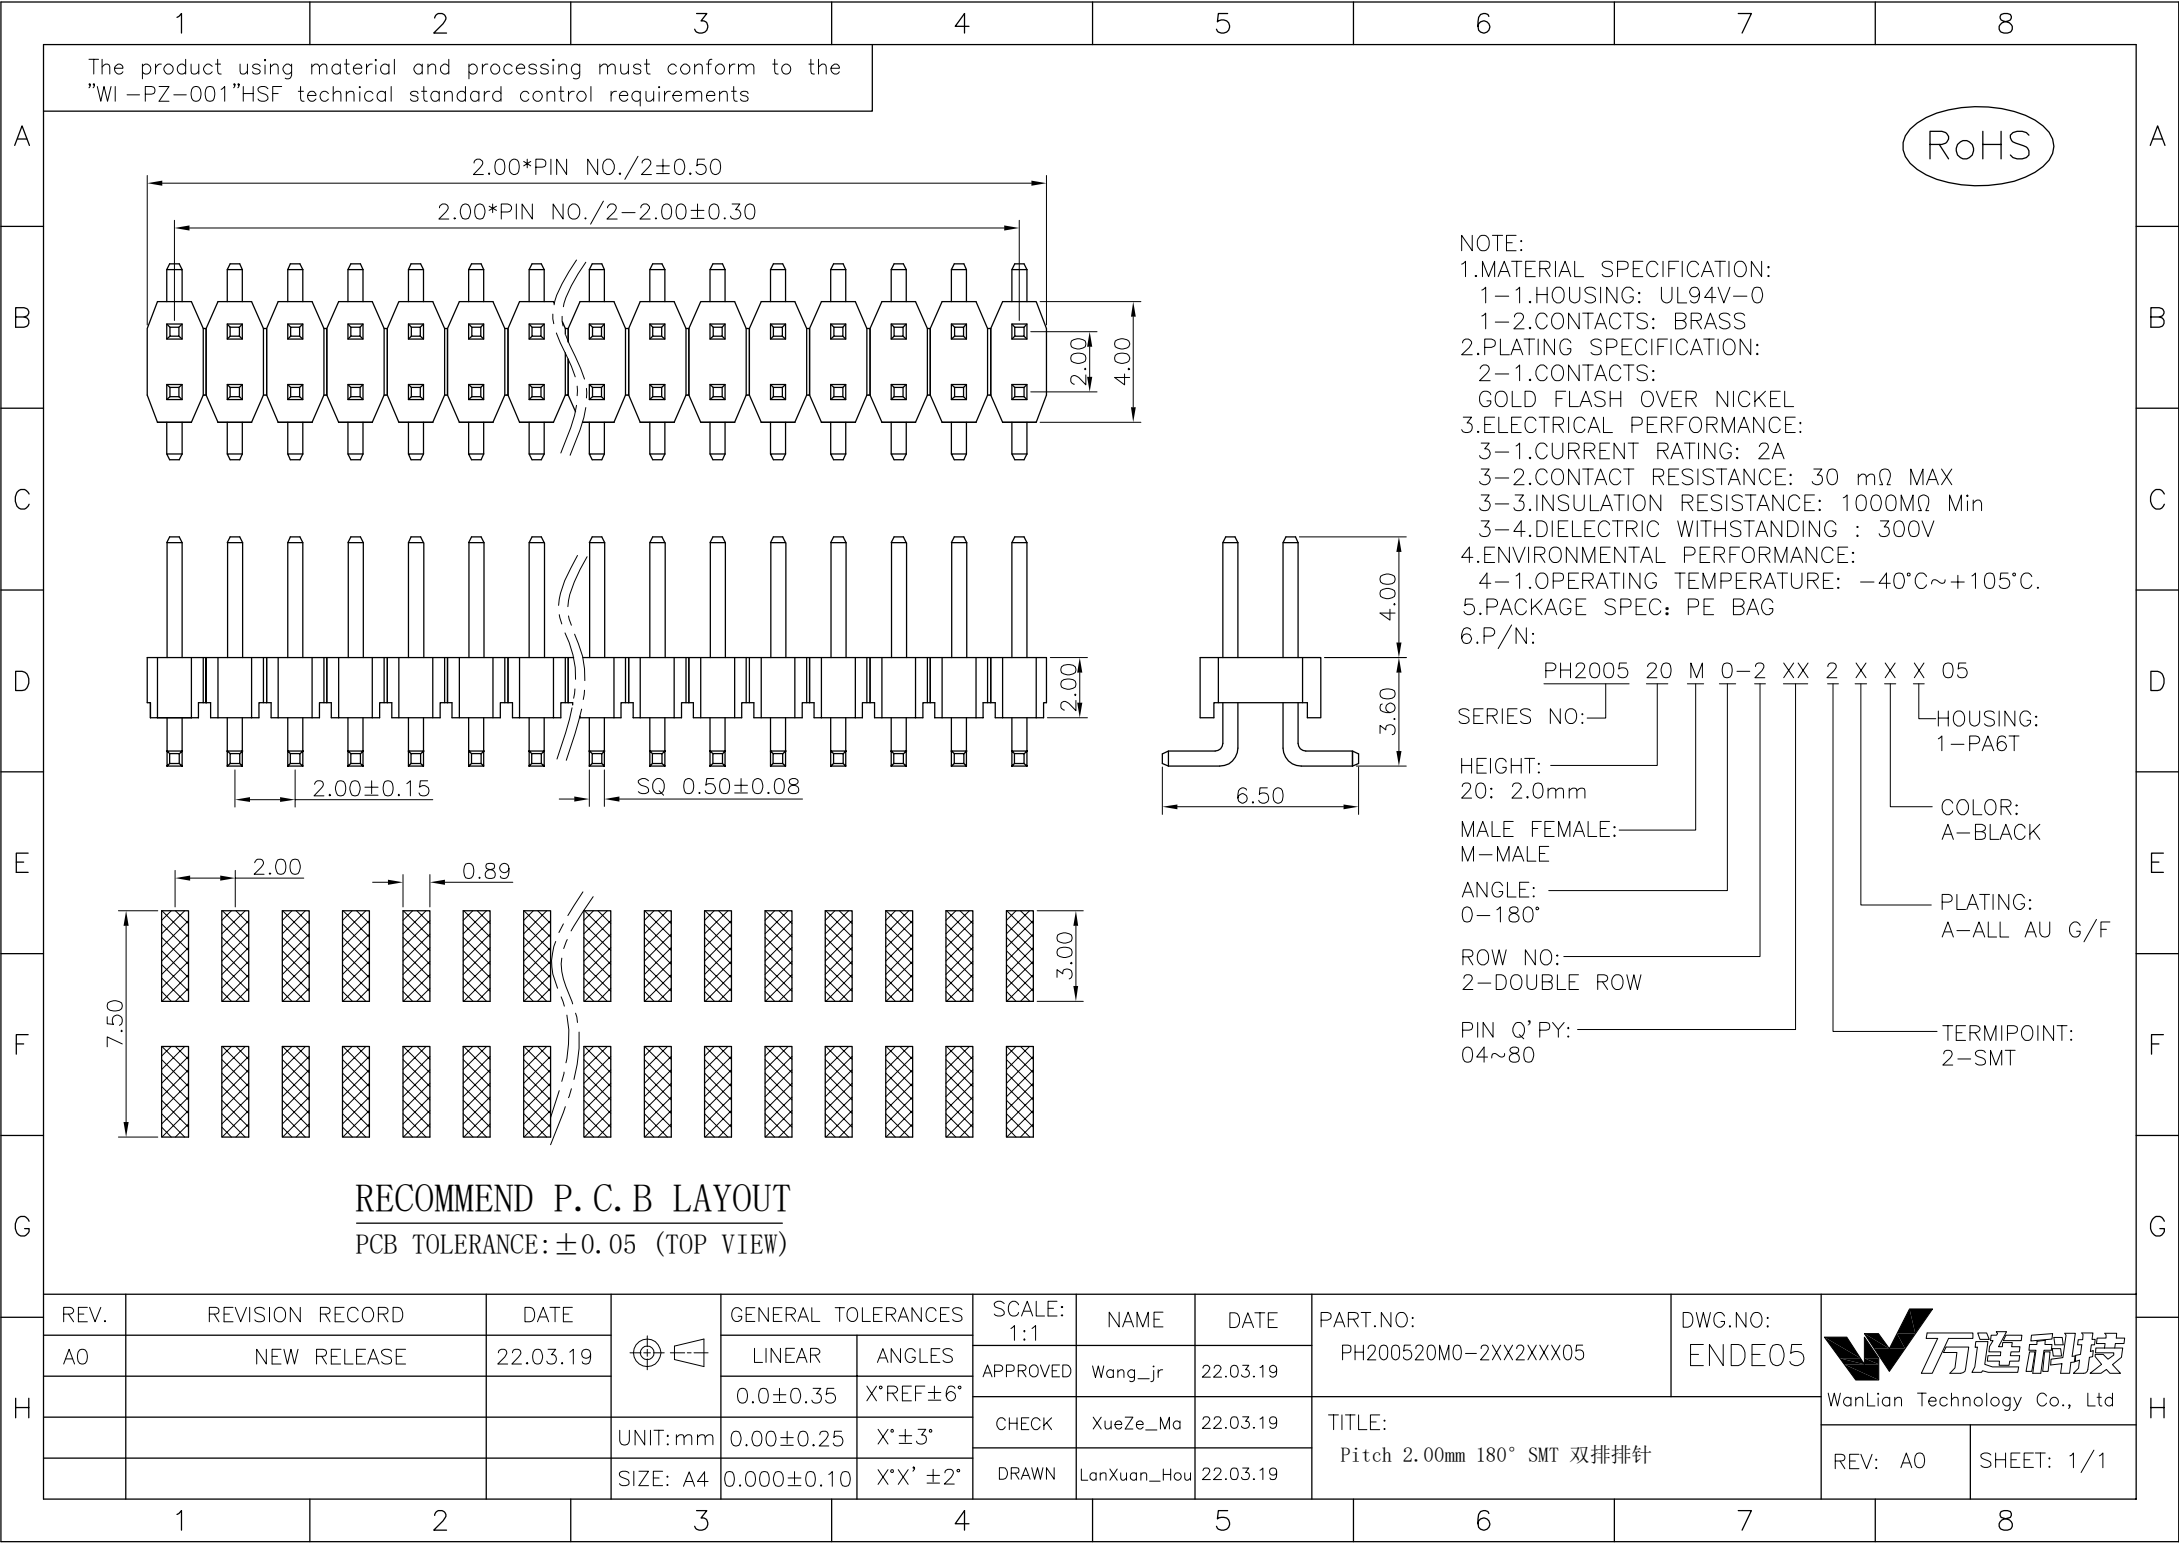

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

PH2005 20 M 0-2 XX 2 X X X 05
SERIES NO: HOUSING: 1-PA6T
HEIGHT: 20: 2.0mm COLOR: A-BLACK
MALE FEMALE: M-MALE PLATING: A-ALL AU G/F
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 04~80 TERMIPOINT: 2-SMT

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX2XXX05	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
				LINEAR	ANGLES						
AO	NEW RELEASE	22.03.19		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	22.03.19	TITLE: Pitch 2.00mm 180° SMT 双排排针		REV: A0 SHEET: 1/1
			UNIT:mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19			
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19			