


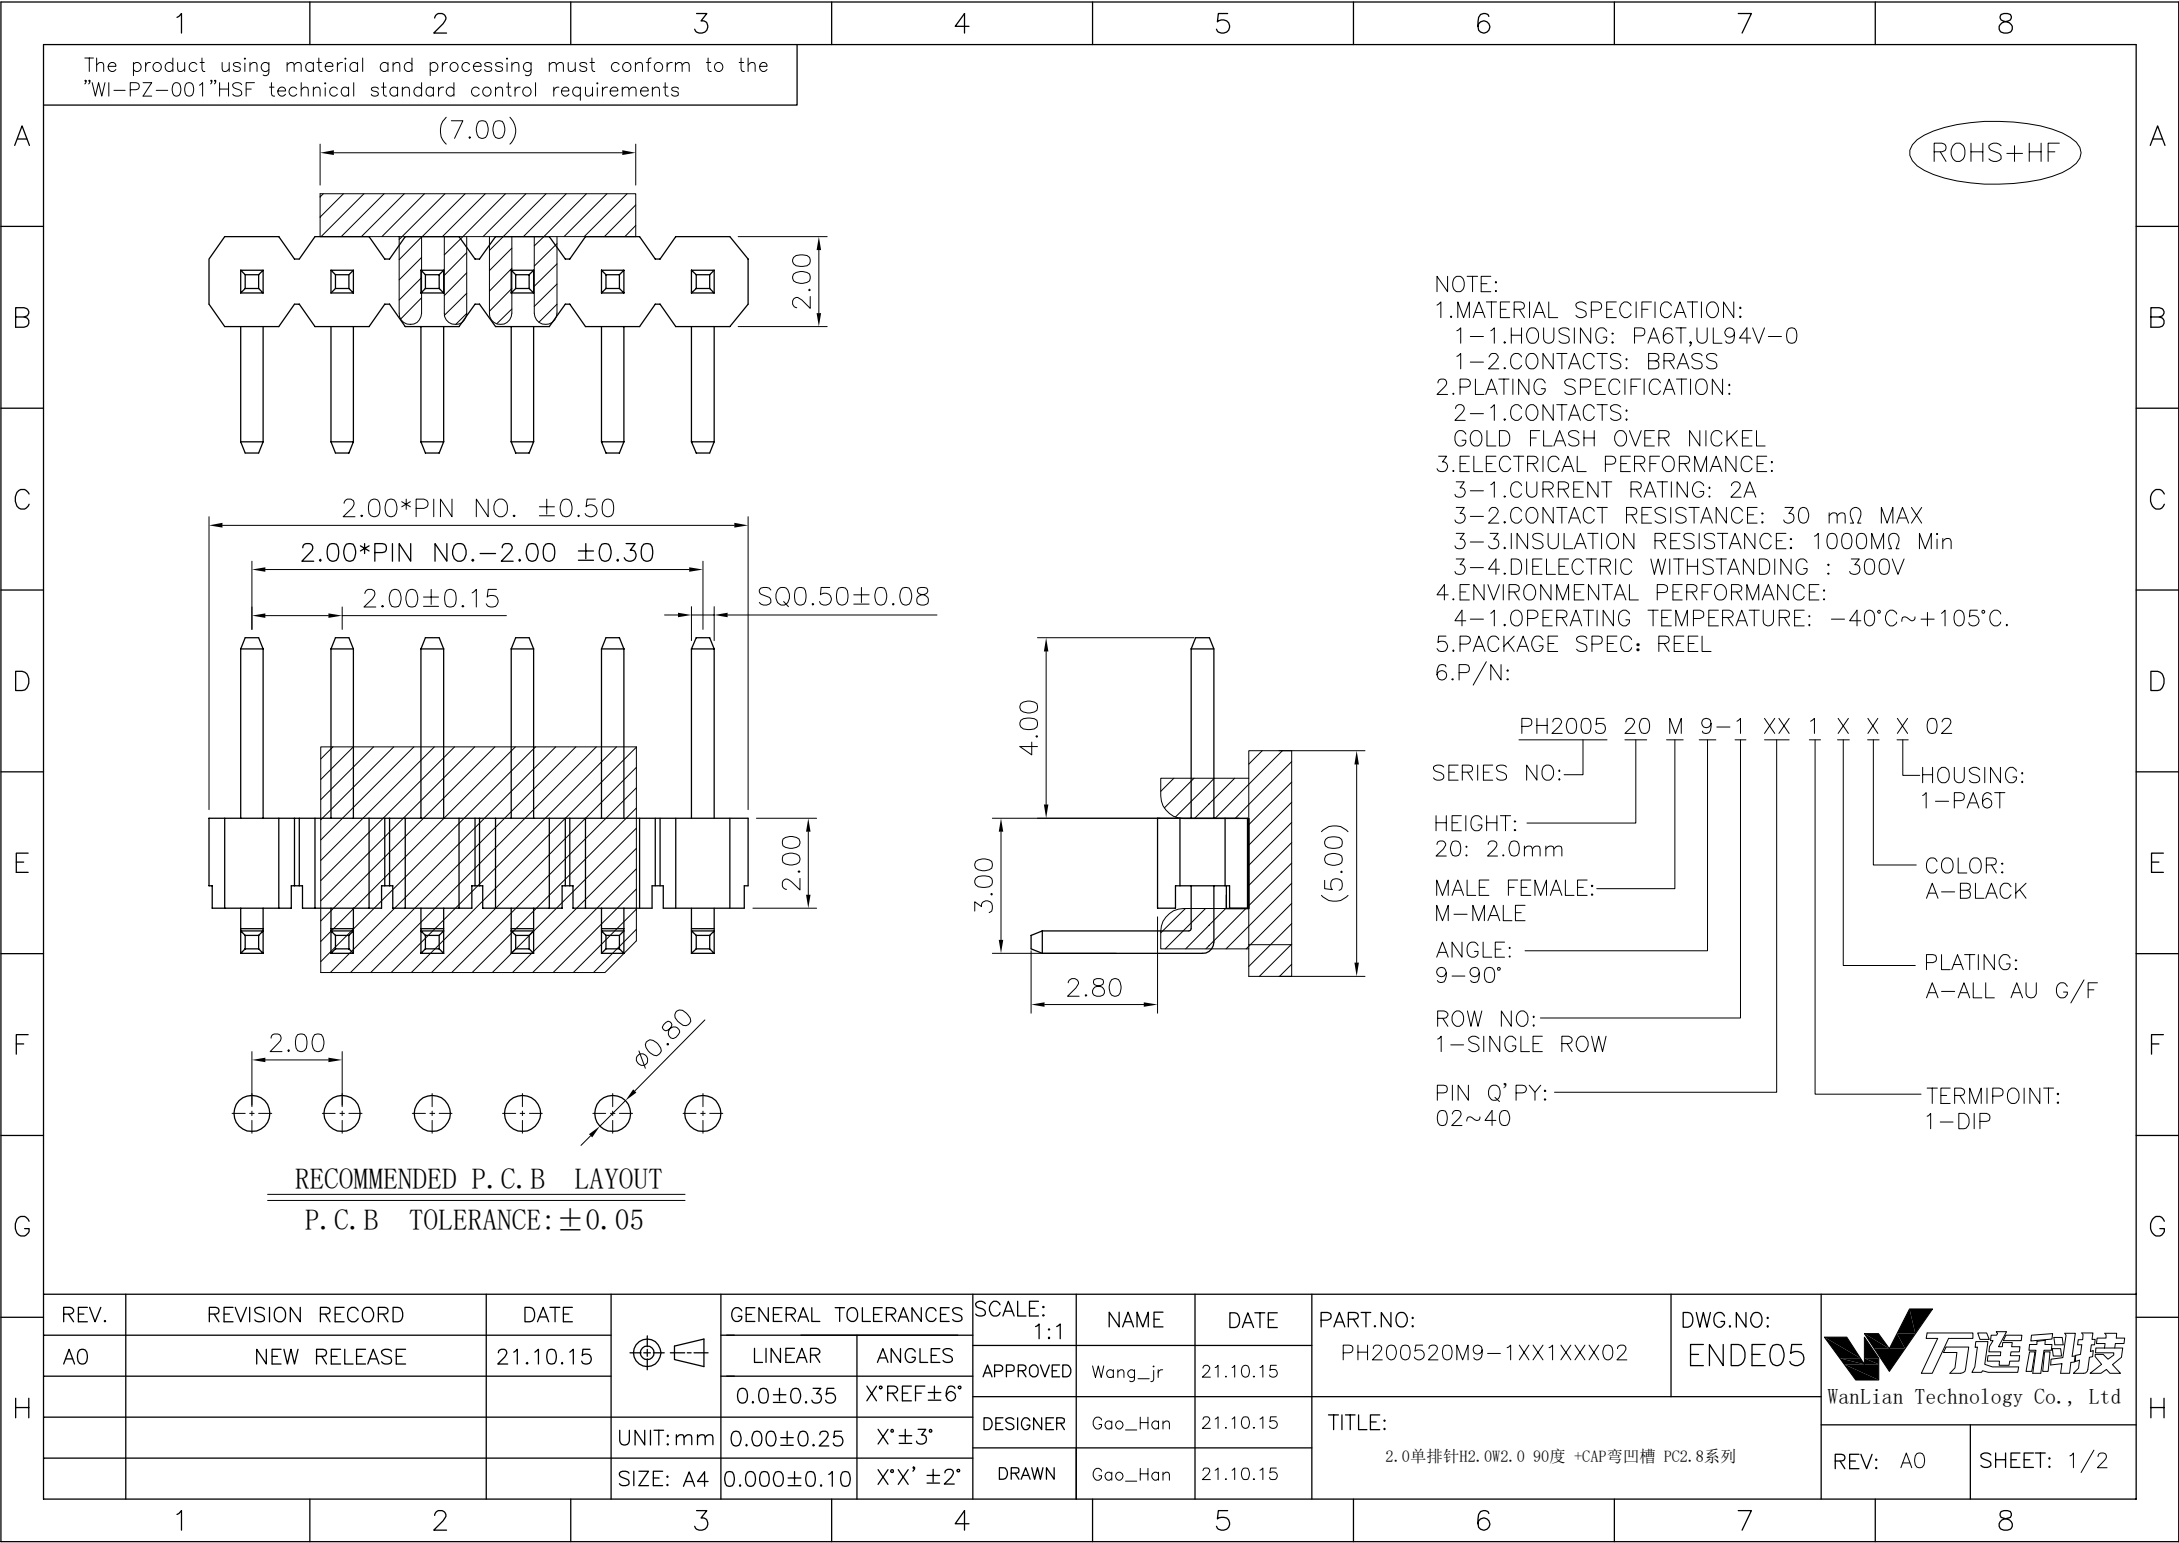

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


ROHS+HF

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: REEL
6.P/N:

SERIES NO: PH2005 20 M 9-1 XX 1 X X X 02
HEIGHT: 20: 2.0mm
MALE FEMALE: M-MALE
ANGLE: 9-90°
ROW NO: 1-SINGLE ROW
PIN Q' PY: 02~40
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 1-DIP

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M9-1XX1XXX02	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
				0.0±0.35	X*REF±6°	DESIGNER	Gao_Han	21.10.15	TITLE: 2.0单排针H2.0W2.0 90度 +CAP弯凹槽 PC2.8系列	REV: A0	SHEET: 1/2	
				UNIT:mm	0.00±0.25	X*±3°	DRAWN	Gao_Han				21.10.15
			SIZE: A4	0.000±0.10	X*X' ±2°							

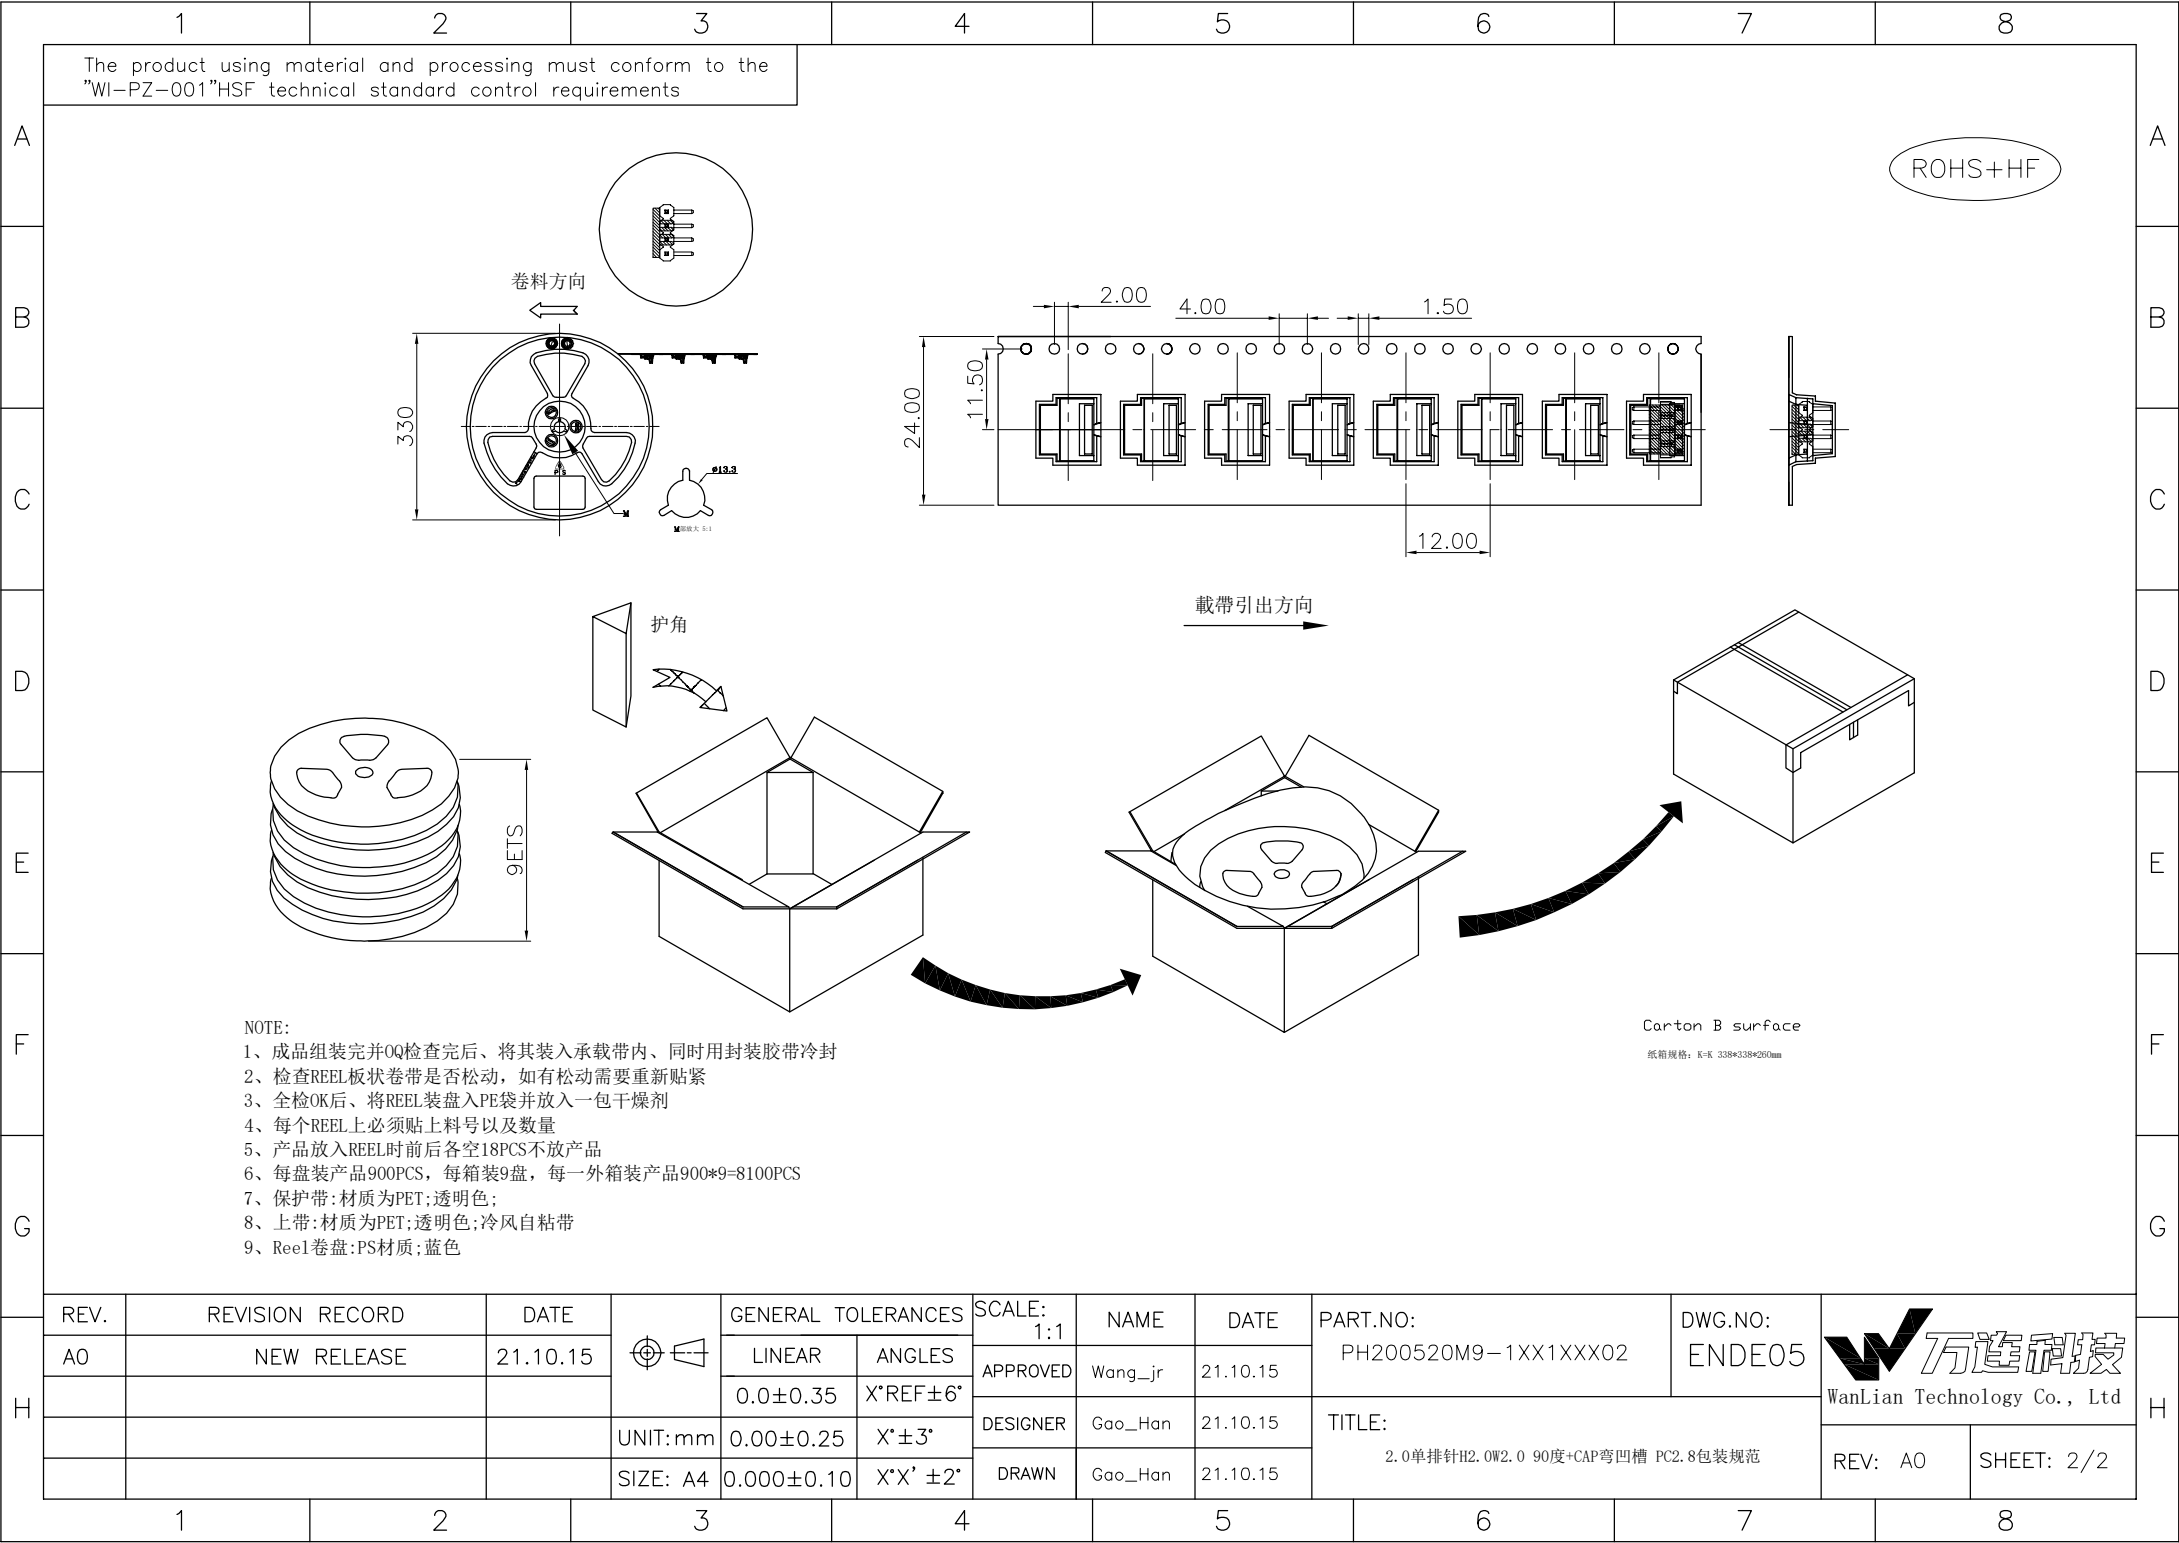

NOTE:

- 1、成品组装完并OQ检查完后、将其装入承载带内、同时用封装胶带冷封
- 2、检查REEL板状卷带是否松动，如有松动需要重新贴紧
- 3、全检OK后、将REEL装盘入PE袋并放入一包干燥剂
- 4、每个REEL上必须贴上料号以及数量
- 5、产品放入REEL时前后各空18PCS不放产品
- 6、每盘装产品900PCS，每箱装9盘，每一外箱装产品900*9=8100PCS
- 7、保护带:材质为PET;透明色;
- 8、上带:材质为PET;透明色;冷风自粘带
- 9、Reel卷盘:PS材质;蓝色

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	21.10.15	PH200520M9-1XX1XXX02	ENDE05		
			UNIT:mm	0.0±0.35	X°REF±6°	APPROVED	Gao_Han	21.10.15	TITLE: 2.0单排针H2.0W2.0 90度+CAP弯凹槽 PC2.8包装规范		REV: A0	SHEET: 2/2
				0.00±0.25	X°±3°	DESIGNER	Gao_Han	21.10.15				
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Gao_Han	21.10.15				