
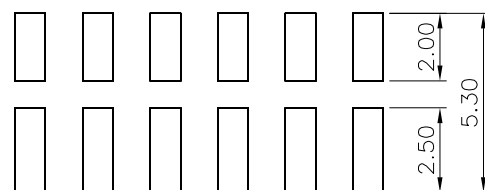
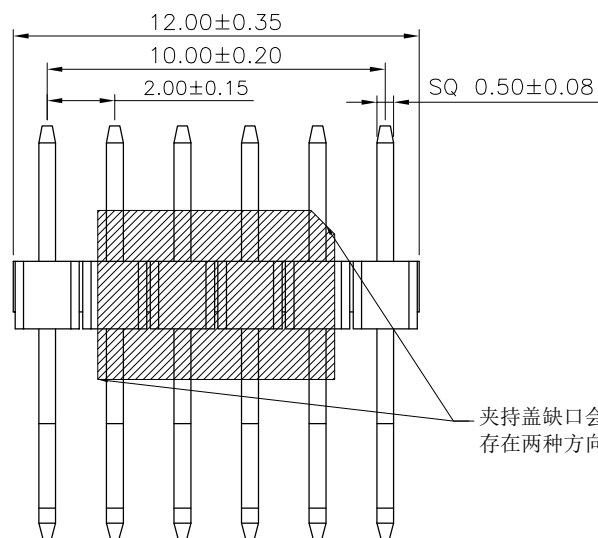


ROHS

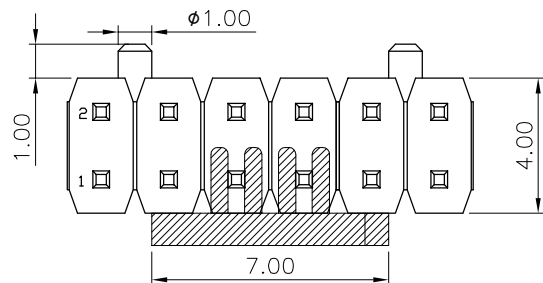

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE: ± 0.05

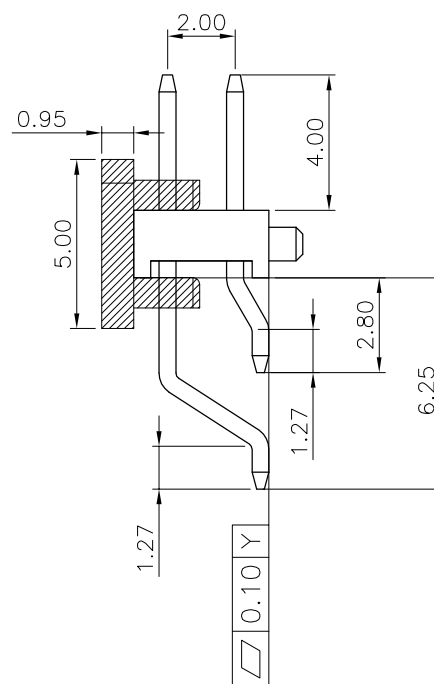


Diagram illustrating the pin configuration and marking for the PH2005 component. The component is a 12-pin package with pins numbered 1 to 12. The marking 'PH2005 20 M 9-2 XX 2 X X X 01' is shown above the pins. Lines connect the marking characters to their respective pin numbers and descriptions.

Pin 1: PH2005
Pin 2: 20
Pin 3: M
Pin 4: 9-2
Pin 5: XX
Pin 6: 2
Pin 7: X
Pin 8: X
Pin 9: X
Pin 10: 01

Descriptions:

- SERIES NO: PH2005
- HEIGHT: 20: 2.0mm
- MALE FEMALE: M-MALE
- ANGLE: 9-90°
- ROW NO: 2-DOUBLE ROW
- PIN Q' PY: 12PIN
- HOUSING: 1-PA9T
- COLOR: A-BLACK
- PLATING: A-ALL AU G/F
- TERMIPOINT: 2-SMT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M9-2XX2XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15			
				0.0±0.35	X*REF±6°						
			UNIT:mm	0.00±0.25	X*±3°	DESIGNER	Gao_Han	21.10.15	TITLE: 2.0双排针H2.0W4.0 2xNP 卧贴带柱+CAP		
				SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	Gao_Han		21.10.15	
									REV: AO	SHEET: 1/2	

