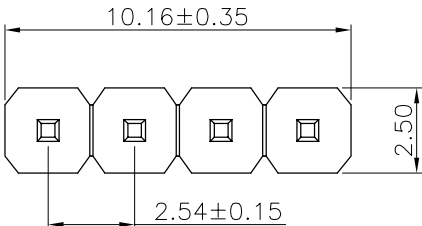
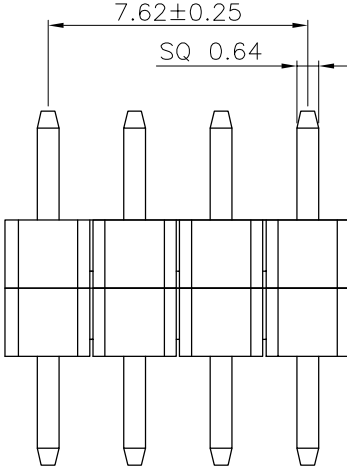
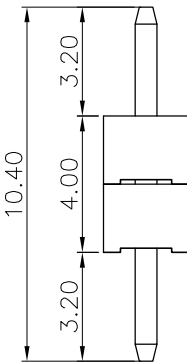



1	2	3	4	5	6	7	8				
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements			RoHS								
			NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PA6T,UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: GOLD FLASH OVER NICKEL 3.ELECTRICAL PERFORMANCE: 3-1.CURRENT RATING: 3A RATED VOLTAGE : 500V AC/DC 3-2.CONTACT RESISTANCE: 30 mΩ MAX 3-3.INSULATION RESISTANCE: 1000MΩ Min 3-4.DIELECTRIC WITHSTANDING : 500V 4.ENVIRONMENTAL PERFORMANCE: 4-1.OPERATING TEMPERATURE: -40°C~+105°C. 5.PACKAGE SPEC: PE BAG 6.P/N: PH2541 20 M 0-1 04 1 A A 1 02 SERIES NO: 25: 2.5mm MALE FEMALE: M-MALE ANGLE: 0-180° ROW NO: 1-SINGLE ROW PIN Q' PY: 01~40 HOUSING: 1-PA6T COLOR: A-BLACK PLATING: A-ALL AU G/F TERMIPOINT: 1-DIP								
											
											
											
RECOMMENDED P. C. B LAYOUT P. C. B TOLERANCE: ±0.05											
REV. REVISION RECORD DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
AO NEW RELEASE 21.10.15			LINEAR ANGLES		APPROVED	Wang_jr	21.10.15	PH254120M0-1XX1XXX02	ENDE05		
			0.0±0.35 X°REF±6°		DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.54mm 180° 单排 DIP 双塑排针 L=10.4MM		REV: A0 SHEET: 1/1	
			0.00±0.25 X°±3°		DRAWN	Gao_Han	21.10.15				
UNIT:mm			0.00±0.10 X°X' ±2°								
SIZE: A4											
1	2	3	4	5	6	7	8				