The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

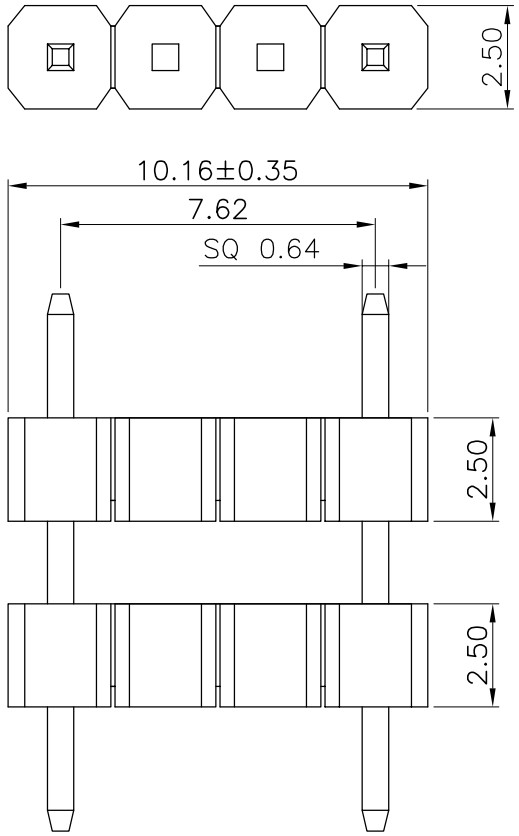


RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ±0.05

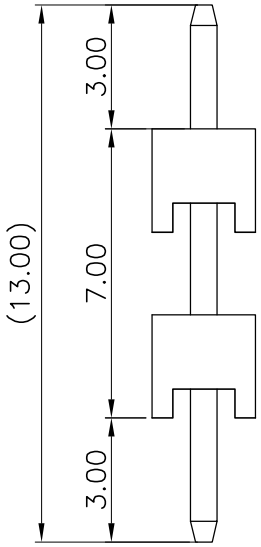


NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: PE BAG
6.P/N:

PH2541 25 M 0-1 XX 1 X X X 03

SERIES NO:

HEIGHT:
25: 2.5mm

MALE FEMALE:
M-MALE

ANGLE:
0-180°

ROW NO:
1-SINGLE ROW

PIN Q'PY:
04PIN

TERMIPOINT:
1-DIP

PLATING:
A-ALL AU G/F

COLOR:
A-BLACK

HOUSING:
1-PA6T
2-LCP
3-PBT

| REV. | REVISION RECORD | DATE |
|---|---|---|
| A0 | NEW RELEASE | 21.10.15 |

UNIT: mm
SIZE: A4

| GENERAL TOLERANCES | |
|---|---|
| LINEAR | ANGLES |
| 0.0±0.35 | X°REF±6° |
| 0.00±0.25 | X°±3° |
| 0.000±0.10 | X°X' ±2° |

| SCALE: 1:1 | NAME | DATE |
|---|---|---|
| APPROVED | Wang_jr | 21.10.15 |
| DESIGNER | Gao_Han | 21.10.15 |
| DRAWN | Gao_Han | 21.10.15 |

PART.NO: PH254125M0-1XX1XXX03

DWG.NO: ENDE05

TITLE:
Pitch 2.54mm 180° 单排 DIP
双塑H=7.0排针 L=13.0MM 4Pin 空第2、3P

万连科技
WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1