
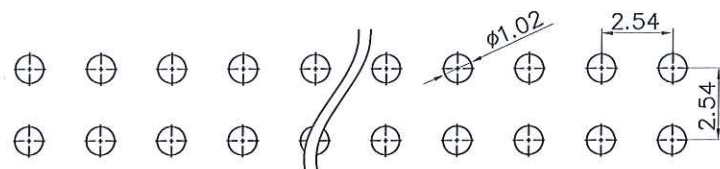
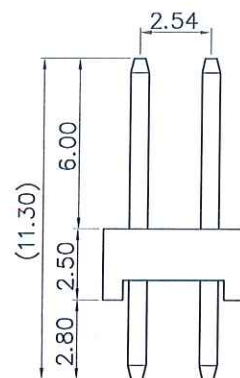
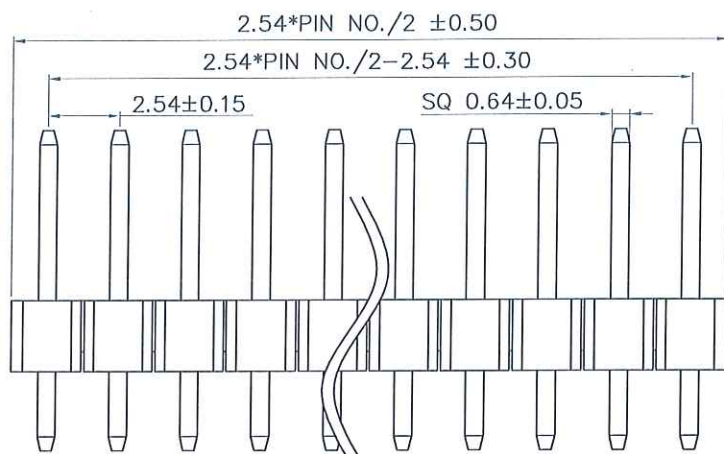


The product using material and processing must conform to the
"W-PZ-001"HSF technical standard control requirements

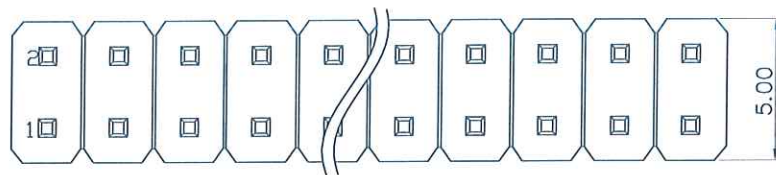

Recommended PCB Layout
TOLERANCE: ±0.05

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA6T,UL94V-0

1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 3A

3-2.CONTACT RESISTANCE: 30 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 500V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: PE BAG

6.P/N:

PH2541 25 M 0-2 XX 1 X X X 02

SERIES NO:

HEIGHT:

25: 2.5mm

MALE FEMALE:

M-MALE

ANGLE:

0-180°

ROW NO:

2-DOUBLE ROW

PIN Q'PY:

02~80

HOUSING:

1-PA6T--RoHS

2-PA6T--RoHS HF

COLOR:

A-BLACK

PLATING:

A-ALL AU G/F

TERMIPOINT:

1-DIP



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		WanLian Technology Co., Ltd
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1			PH254125M0-2XX1XXX02	ENDE05		
A1	EXPLANATORY ANNOTATIONS	25.01.06		0.0±0.35	X'REF±6°	APPROVED	25.9.8	25.9.8	TITLE: Pitch 2.54mm 180° 双排 DIP 单塑排针 L=11.3MM		REV: A1	SHEET: 1/2
			UNIT: mm	0.00±0.25	X'±3°	DESIGNER	25.9.8	25.9.8				
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	25.9.8	25.9.8				



$$\text{RoHS} + \text{HF}$$


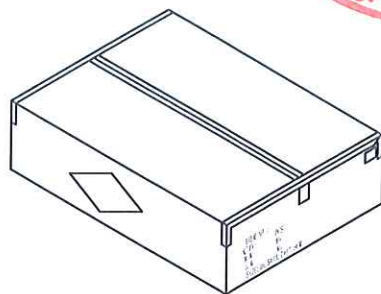
Diagram illustrating the product packaging components:

- 产品装入PE袋 (Product loaded into PE bag)
- 数量标签 (Quantity label)
- 干燥剂 (Desiccant)


产品装入PE袋、内放一包干燥剂、, 如图所示; 用封口机封口, 外贴一张数量标签,

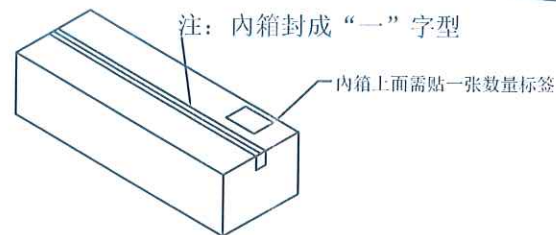

将PE袋装好的产品放入内箱中，每箱10袋



外箱封口“工”字型，
备注：

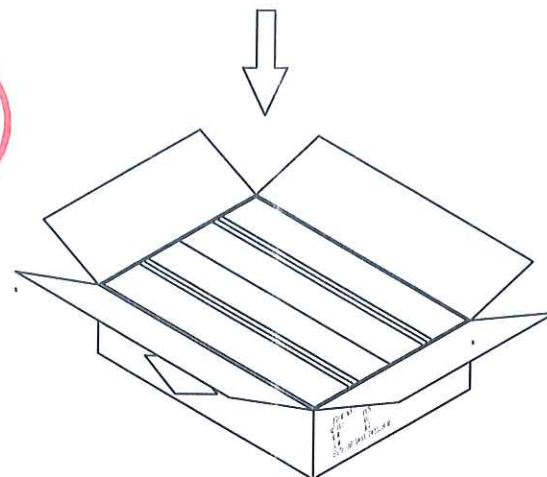

将封好的内箱装入外箱中，1外箱装2内箱

双排		单排	
PIN数	PCS/袋	PIN数	PCS/袋
1-----5	500	1-----5	2000
6-----10	300	6-----10	1000
11-----15	200	11-----15	500
16-----20	150	16-----20	300
21-----25	100	21-----25	200
26-----30	100	26-----30	100
31-----35	50	31-----35	100
36-----40	50	36-----40	50

1: 包装数量: 10袋/内箱;
20袋/外箱;
2: 纸箱规格: 内箱: 45.0*16.0*11.5CM
外箱: 46.5*33.7*12.8CM

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH254125M0-2XX1XXX02	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	21.10.15	25.5.8			
A1	EXPLANATORY ANNOTATIONS	25.01.06		0.0±0.35	X'REF±6°	DESIGNER	丁浩	25.09.08	TITLE: 2.54排针 180° 常规包装规范		
				UNIT: mm	0.00±0.25	X'±3°					
				SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	黄容		25.09.08	
										REV: A1	SHEET: 2/2



WanLian Technology Co., Ltd.

REV: A1	SHEET: 2/2
---------	------------