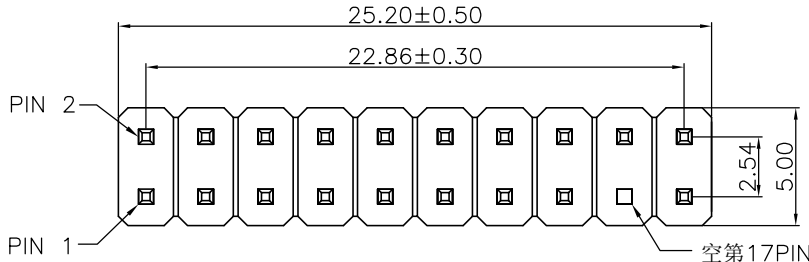
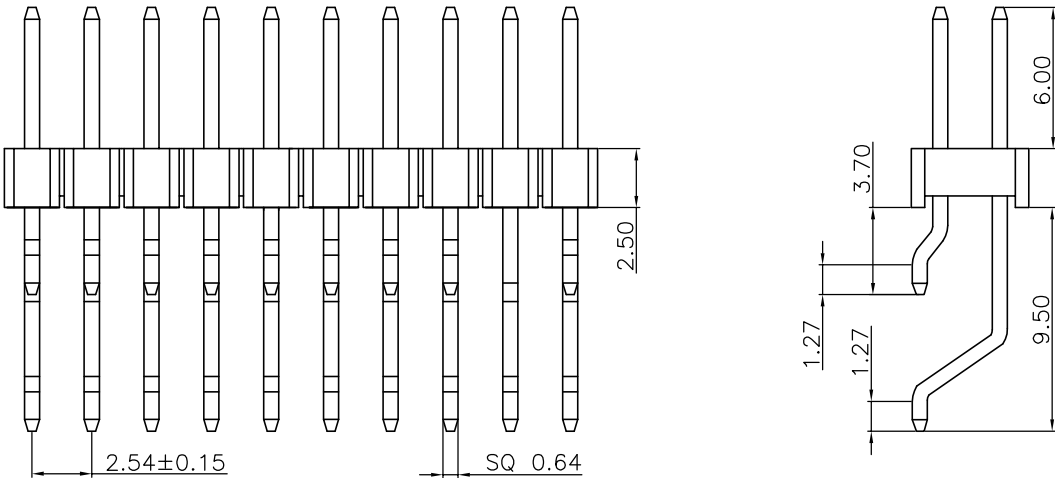
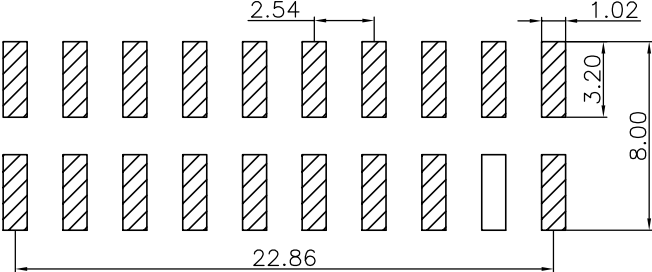


	1	2	3	4	5	6	7	8					
A	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements				RoHS								
B													
C													
D													
E	RECOMMEND P. C. B LAYOUT PCB TOLERANCE:±0.05 (TOP VIEW)				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PA6T,UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH OVER NICKEL 3.ELECTRICAL PERFORMANCE: 3-1.CURRENT RATING: 3A 3-2.CONTACT RESISTANCE: 30 mΩ MAX 3-3.INSULATION RESISTANCE: 1000MΩ Min 3-4.DIELECTRIC WITHSTANDING : 500V 4.ENVIRONMENTAL PERFORMANCE: 4-1.OPERATING TEMPERATURE: -40°C~+105°C. 5.P/N: PH2541 25 M 9-2 20 2 X X X 03 SERIES NO: HOUSING: 1-PA6T HEIGHT: 25: 2.5mm MALE FEMALE: M-MALE ANGLE: 9-90° ROW NO: 2-DOUBLE ROW PIN Q' PY: 20PIN COLOR: A-BLACK PLATING: A-ALL AU G/F TERMIPOINT: 2-SMT								
F													
G													
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
	AO	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19	PH254125M9-2202XXX03	ENDE05		
					0.0±0.35	X'REF±6°	CHECK	XueZe_Ma	22.03.19	TITLE: PITCH 2.54mm 90° SMT 双排排针 2x10P 空第17P		REV: A0	SHEET: 1/1
					UNIT:mm	0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.03.19			
	1	2	3		SIZE:A4	0.000±0.10	10°X'±2°						
	1	2	3	4	5	6	7	8					