

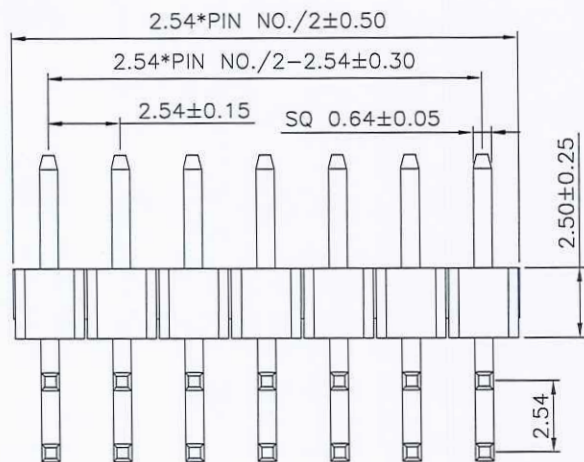


The product using material and processing must conform to the
"WI-PZ-001"HSF technical standard control requirements

RoHS

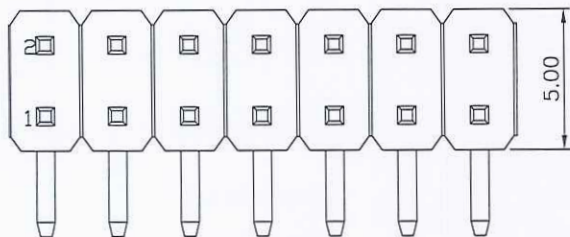

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

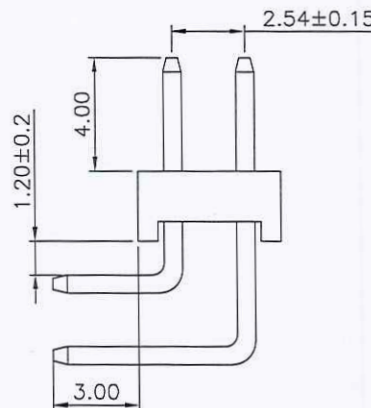

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA6T,UL94V-0

1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 3A

3-2.CONTACT RESISTANCE: 30 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 500V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: PE BAG

6.P/N:

PH2541 25 M 9-2 XX 1 X X X 07

SERIES NO:

HEIGHT:
25: 2.5mm

MALE FEMALE:
M-MALE

ANGLE:
9-90°

ROW NO:
2-DOUBLE ROW

PIN Q'PY:
02~80

HOUSING:
1-PA6T

COLOR:
A-BLACK

PLATING:
A-ALL AU G/F

TERMIPOINT:
1-DIP



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	24.08.30	LINEAR	1:1	8/8/8	24.8.30	PH254125M9-2XX1XXX07	ENDE05		
			0.0±0.35	APPROVED	24.8.30					
			0.00±0.25	DESIGNER	24.08.30					
			0.000±0.10	DRAWN	24.08.30					

REV: A0 SHEET: 1/1