
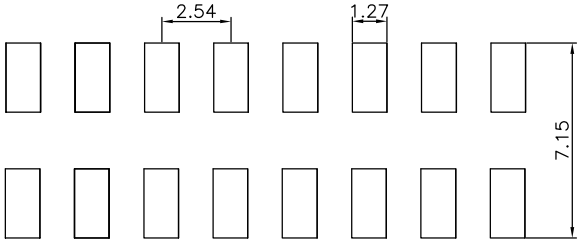
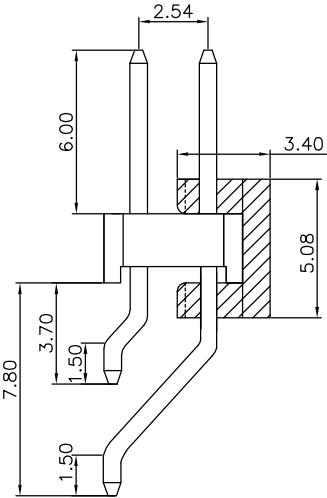
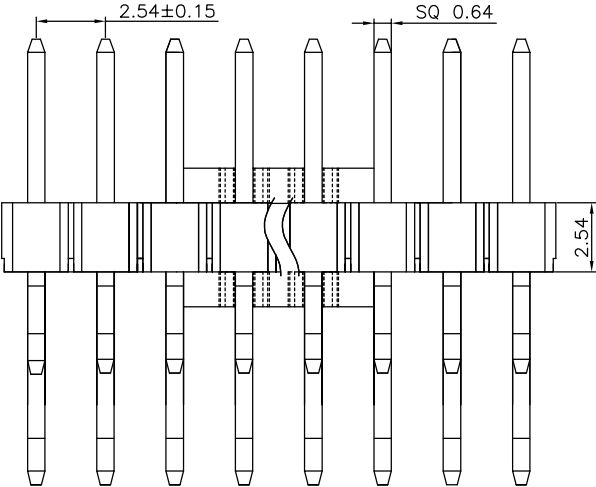


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

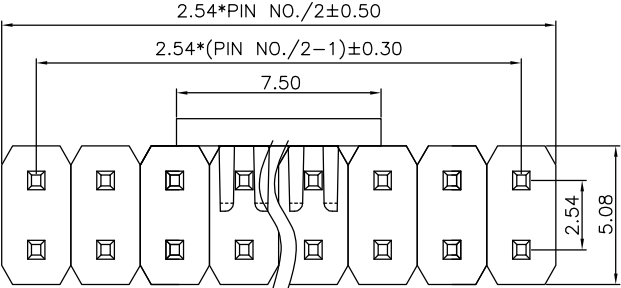

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA9T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: REEL
6.P/N:

PH2541 25 M 9-2 XX 2 X X X 02

SERIES NO: 25 M 9-2 XX 2 X X X 02

HEIGHT: 25: 2.54mm

MALE FEMALE: M-MALE

ANGLE: 9-90°

ROW NO: 2-DOUBLE ROW

PIN Q' PY: 4~80

HOUSING: 1-PA9T

COLOR: A-BLACK

PLATING: A-ALL AU G/F

TERMIPOINT: 2-SMT

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:		DWG.NO:				H				
	AO		NEW RELEASE		22.03.19			LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19	PH254125M9-2XX2XXX02		ENDE05								
							0.0±0.35	X°REF±6°															
							UNIT:mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19	TITLE: PITCH 2.54mm 90° SMT双排排针H:2.54										
							SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19											
1			2			3			4			5			6			7			8		