



$$\text{RoHS} + \text{HF}$$


3D VIEW

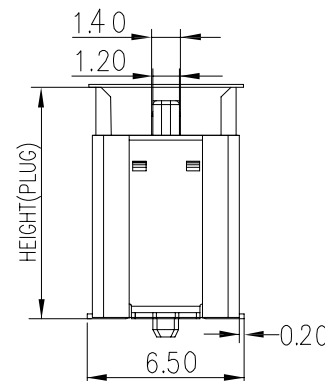

MATING HEIGHT	HEIGHT(PLUG)	HEIGHT(SOCKET)
5.0	4.5	4.0
8.0	7.5	4.0
10	4.5	9.0
13	7.5	9.0
15	9.5	9.0

Contacts	Dimensions(mm)			Contacts	Dimensions(mm)		
	A.	B.	C.		A.	B.	C.
10	11.3	3.2	8.2	50	27.3	19.2	24.2
16	13.7	5.6	10.4	60	31.3	23.2	28.2
20	15.3	7.2	12.2	70	35.3	27.2	32.2
24	16.9	8.8	13.8	80	39.3	31.2	36.2
26	17.7	9.6	14.6	100	47.3	39.2	44.2
30	19.3	11.2	16.2	120	55.3	47.2	52.2
40	23.3	15.2	20.2	140	63.3	55.2	60.2

[illegible]


WanLian Technology Co., Ltd

REV: AO

SHEET: 1/4



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

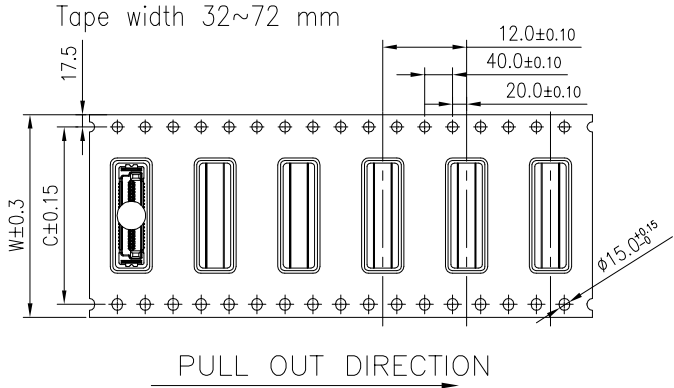

NOTE:
1.10 Sprocket hole pitch cumulative tolerance ±0.20.
2.Carrier camber is within 1mm in 100mm.
3.Material: white conductive polystyrene alloy.
4.Material Thickness: 0.40±0.05mm.


PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
20PIN~30PIN	32	28.4	1000	8	8000
40PIN~50PIN	44	40.4	1000	6	6000
60PIN~80PIN	56	52.4	1000	5	5000
100PIN	72	68.4	1000	4	4000

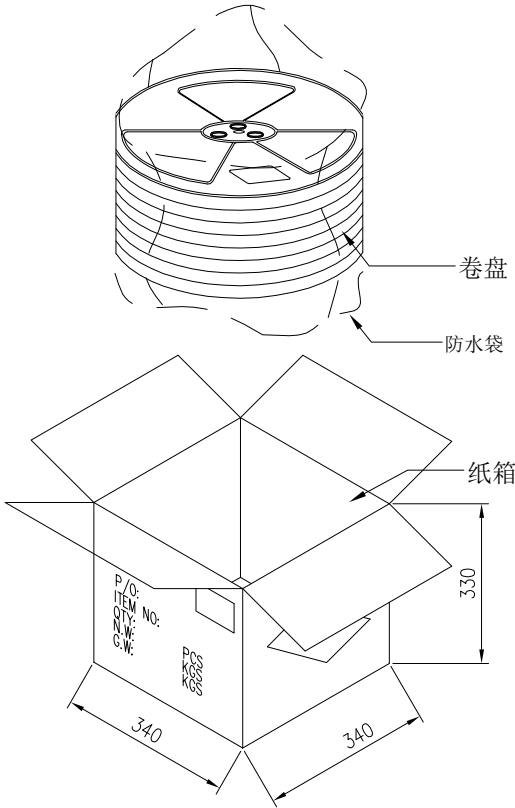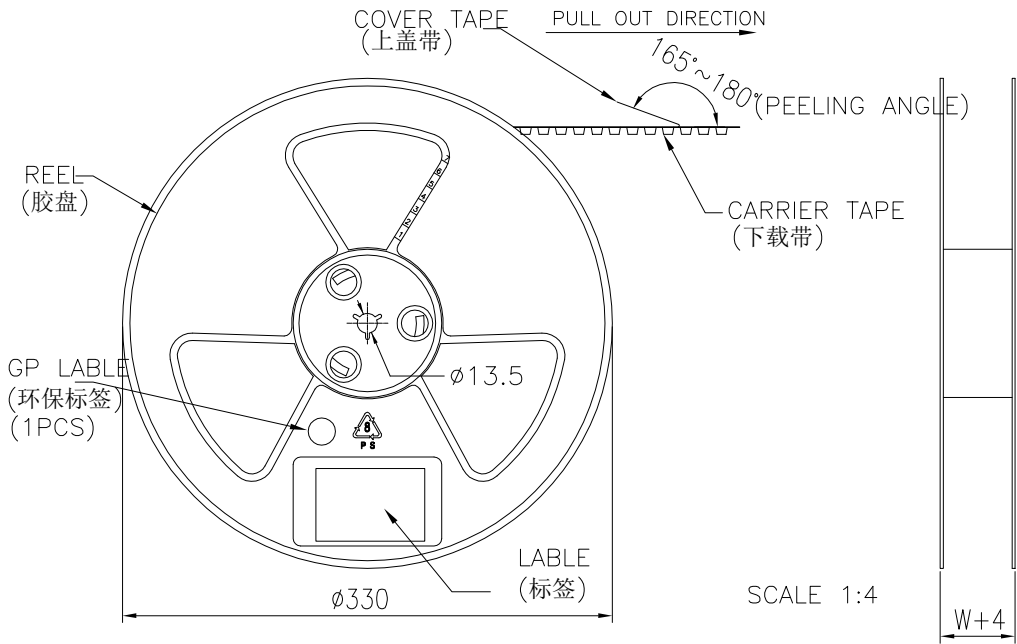

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF



Tape width 32~72 mm

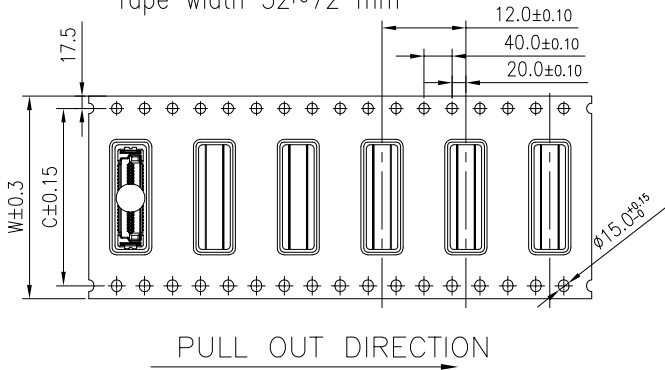

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2.Carrier camber is within 1mm in 100mm.
3.Material: white conductive polystyrene alloy.
4.Material Thickness: 0.40 ± 0.05 mm.

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
20PIN~30PIN	32	28.4	700	8	5600
40PIN~50PIN	44	40.4	700	6	4200
60PIN~80PIN	56	52.4	700	5	3500
100PIN	72	68.4	700	4	2800

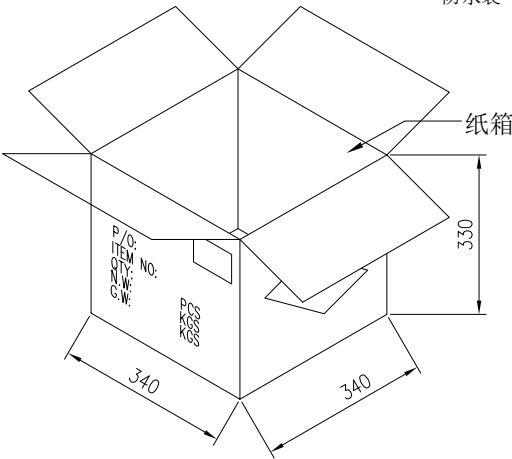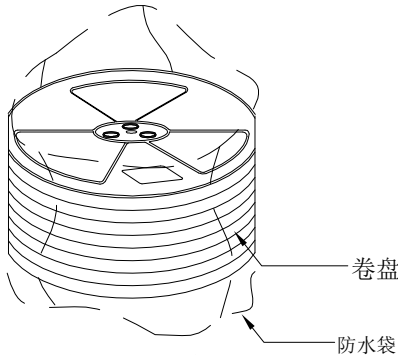

REEL
(胶盘)

GP LABEL
(环保标签)
(1PCS)

COVER TAPE
(上盖带)

PULL OUT DIRECTION

165°~180°(PEELING ANGLE)

CARRIER TAPE
(下载带)

Ø13.5

LABEL
(标签)

Ø330

SCALE 1:4


W+4

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	B0807XXM0-2XX2XXX02	ENDE05		
			UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.10.28	TITLE: 7.5H 公座 PACKAGE SPEC		REV: A0	SHEET: 3/4
				0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28				
			SIZE: A4	0.000±0.10	X°X' ±2°							

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

Tape width 32~72 mm

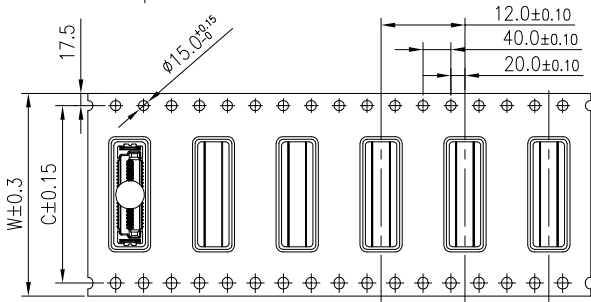

PULL OUT DIRECTION

COVER TAPE (上盖带)
PULL OUT DIRECTION
165°~180°(PEELING ANGLE)
CARRIER TAPE (下载带)

REEL (胶盘)

GP LABEL (环保标签) (1PCS)

P8

LABEL (标签)

Ø330


SCALE 1:4

W+4

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2.Carrier camber is within 1mm in 100mm.
3.Material: white conductive polystyrene alloy.
4.Material Thickness: 0.40 ± 0.05 mm.

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
20PIN~30PIN	32	28.4	500	8	4000
40PIN~50PIN	44	40.4	500	6	3000
60PIN~80PIN	56	52.4	500	5	2500
100PIN	72	68.4	500	4	2000

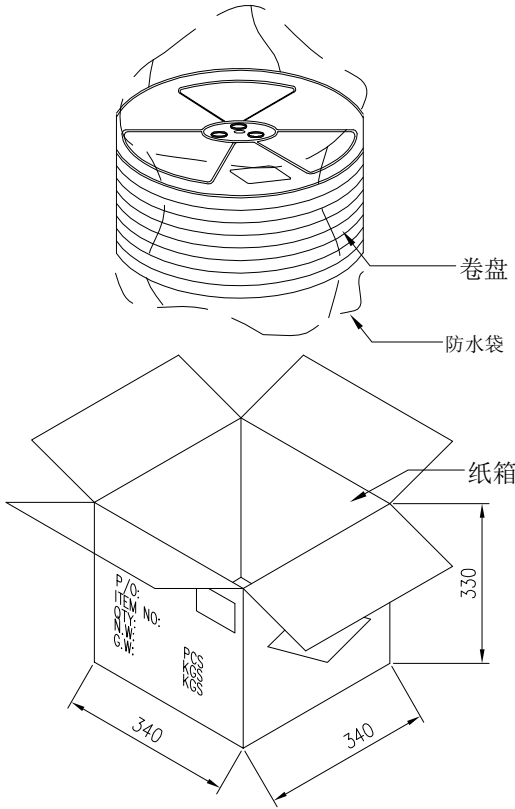

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	B0807XXM0-2XX2XXX02	ENDE05		
			UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	22.10.28	TITLE: 9.5H 公座 PACKAGE SPEC		REV: A0	SHEET: 4/4
				0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.10.28				
			SIZE: A4	0.000±0.10	X°X'±2°							