



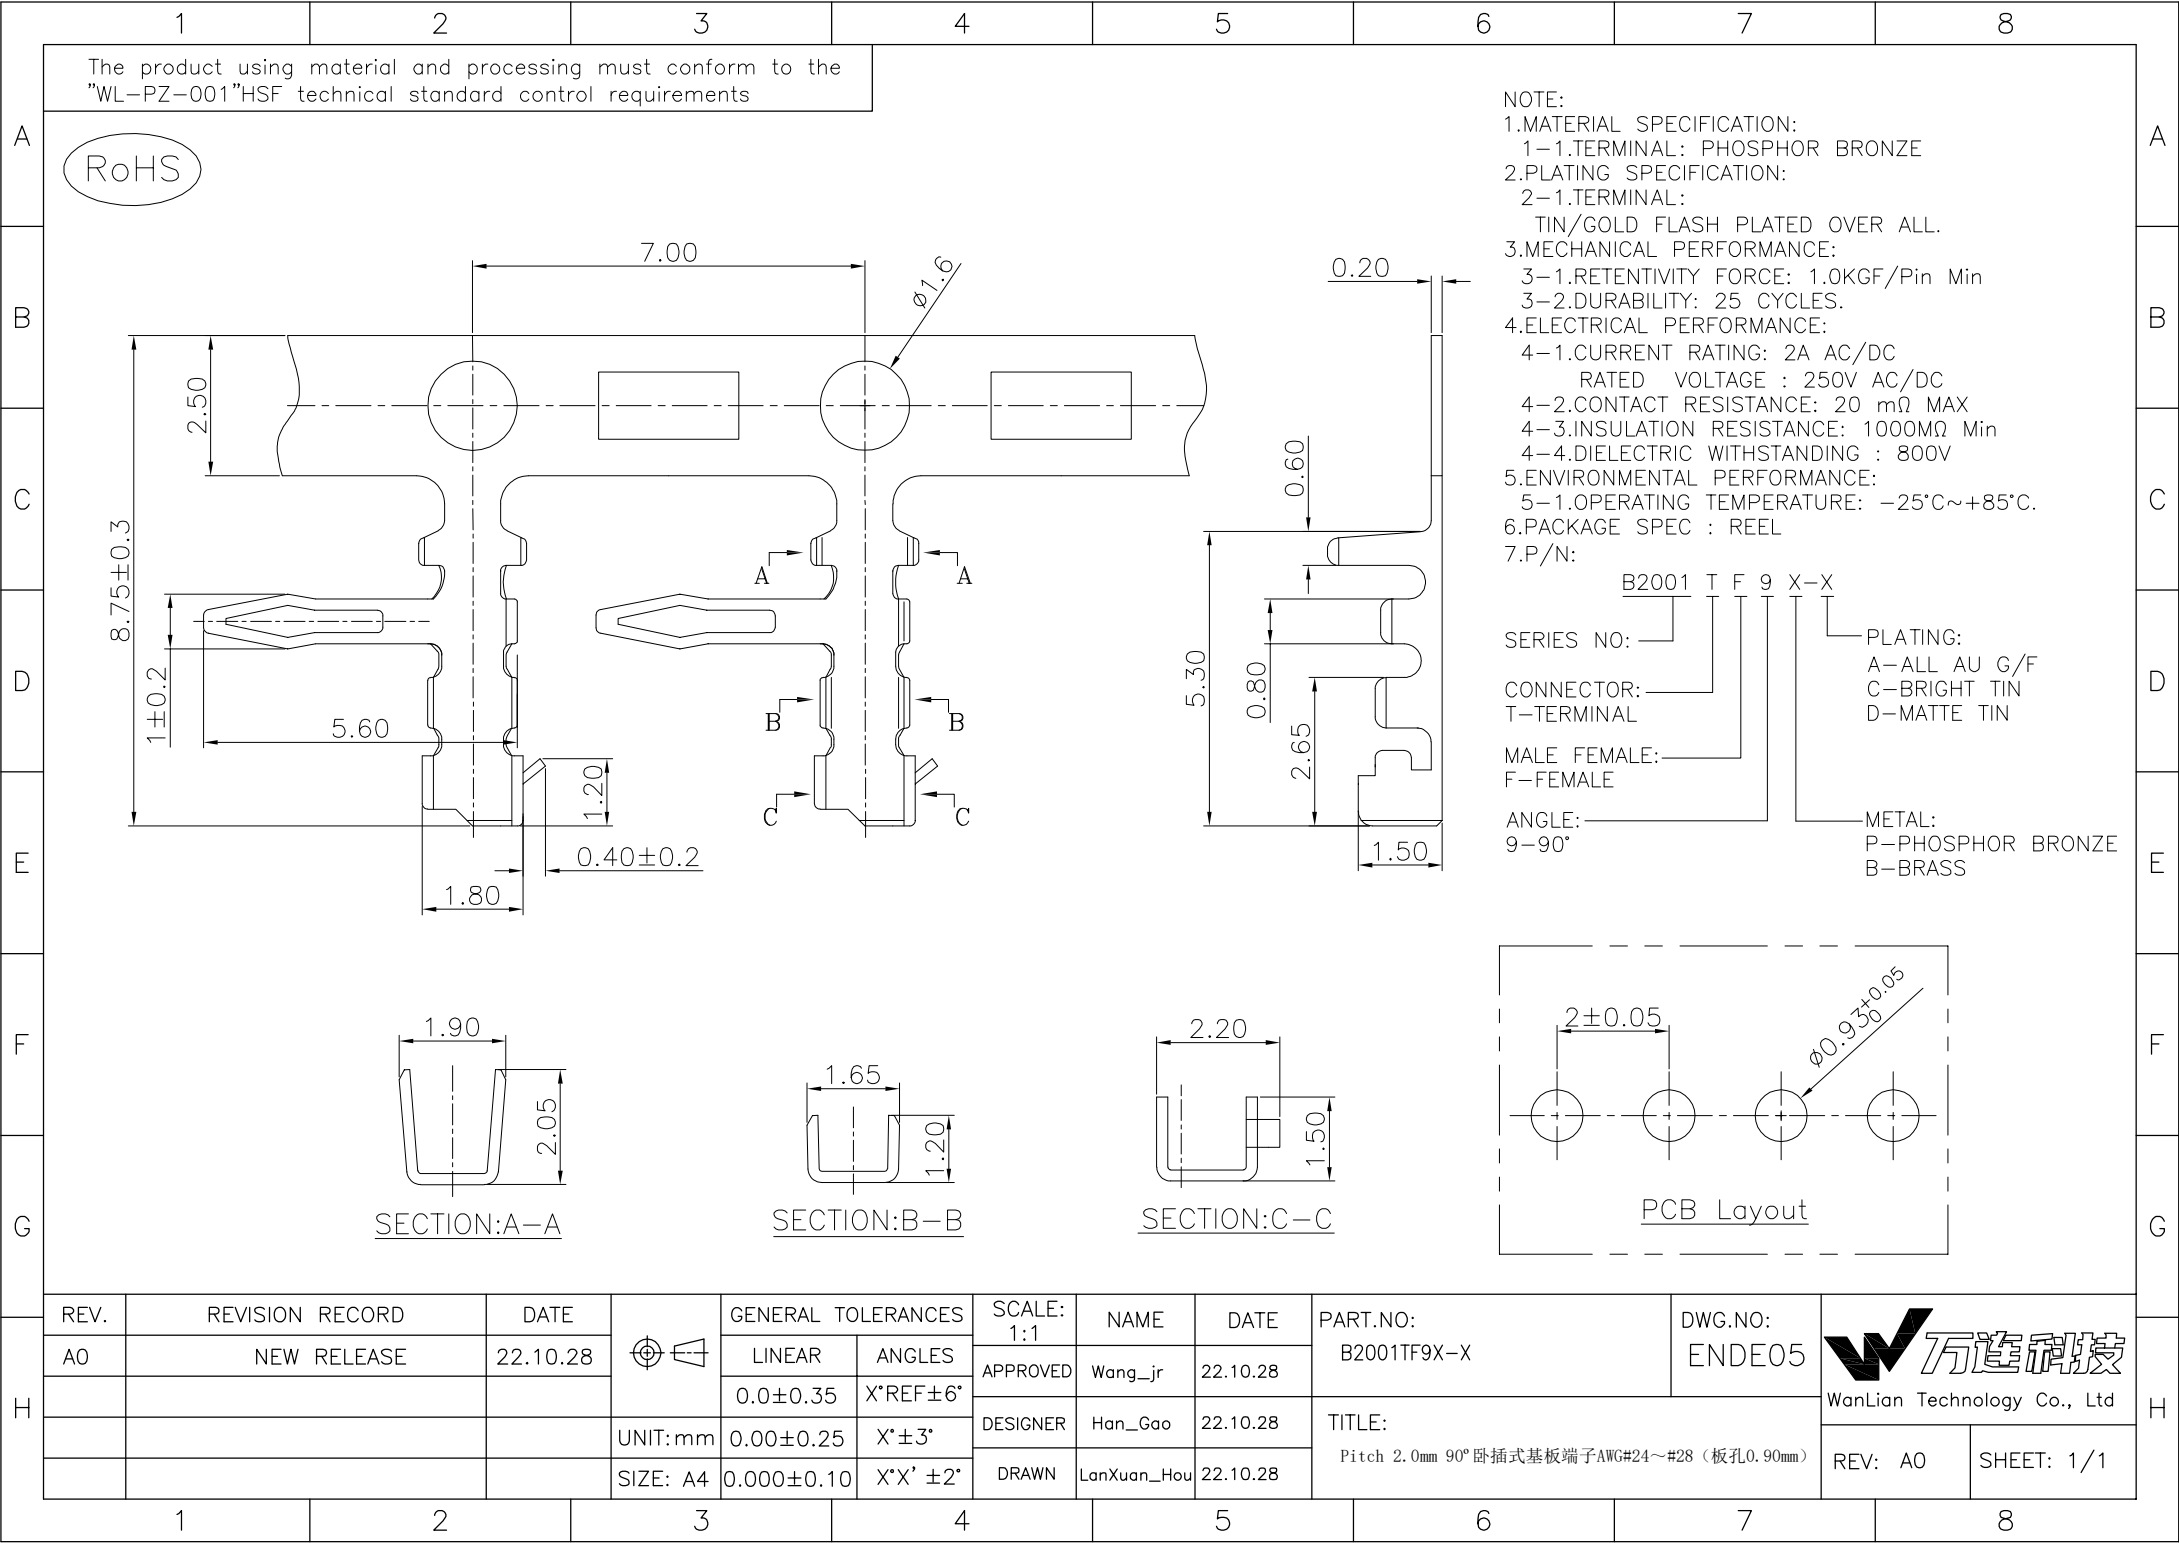

The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.TERMINAL: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.TERMINAL:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/Pin Min
3-2.DURABILITY: 25 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A AC/DC
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 800V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC : REEL
7.P/N:
B2001 T F 9 X-X
SERIES NO:
CONNECTOR:
T-TERMINAL
MALE FEMALE:
F-FEMALE
ANGLE:
9-90°
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

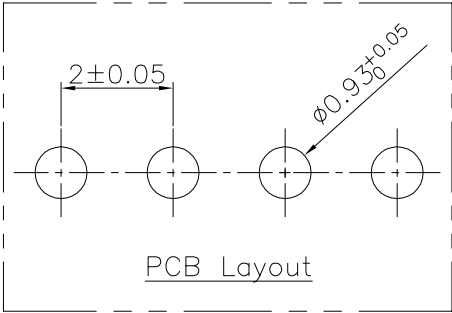

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1			B2001TF9X-X	ENDE05		
				0.0±0.35	X°REF±6°	APPROVED	Wang_jr	22.10.28			WanLian Technology Co., Ltd	
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.10.28	TITLE:			
			SIZE: A4	0.000±0.10	X°X'±2°	DRAWN	LanXuan_Hou	22.10.28	Pitch 2.0mm 90°卧插式基板端子AWG#24~#28 (板孔0.90mm)		REV: A0	SHEET: 1/1