

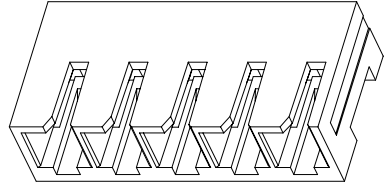


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

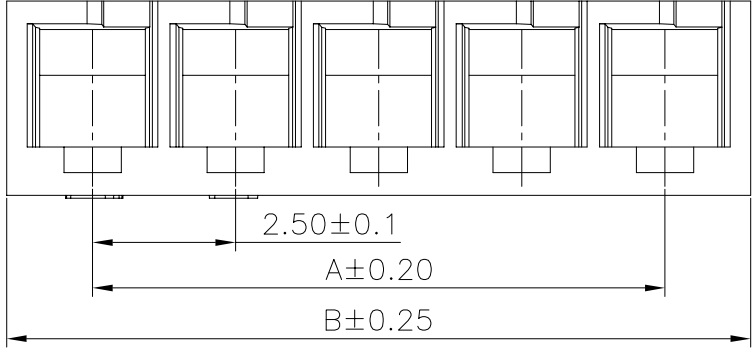

3D VIEW
1:2

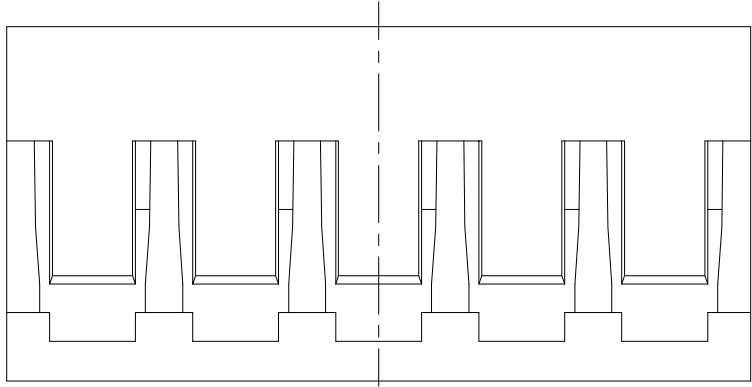

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 3A
RATED VOLTAGE : 125V
2-2.CONTACT RESISTANCE: 10 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1000V AC
3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -40°C~+105°C.
4.PACKAGE SPEC: PE BAG
5.P/N:
B25131 H F 9-1 XX X X
SERIES NO: H F 9-1 XX X X
CONNECTOR: H-HOUSING
MALE FEMALE: F-FEMALE
ANGLE: 9-90°
WATER CODE
0-N/A
COLOR:
M-BEIGE
PIN Q'PY:
02~16
ROW NO:
1-SINGLE ROW

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	2.50	5.50	10	22.50	25.50
03	5.00	8.00	11	25.00	28.00
04	7.50	10.50	12	27.50	30.50
05	10.00	13.00	13	30.00	33.00
06	12.50	15.50	14	32.50	35.50
07	15.00	18.00	15	35.00	38.00
08	17.50	20.50	16	37.50	40.50
09	20.00	23.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	B25131HF9-1XXXX	ENDE05	
				0.0±0.35	X'REF±6°	CHECK	XueZe_Ma	22.10.28	TITLE: Pitch 2.50mm 90°JC25 HOUSING		
			UNIT:mm	0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.10.28			
			SIZE: A4	0.000±0.10	X'X' ±2°						

WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1