


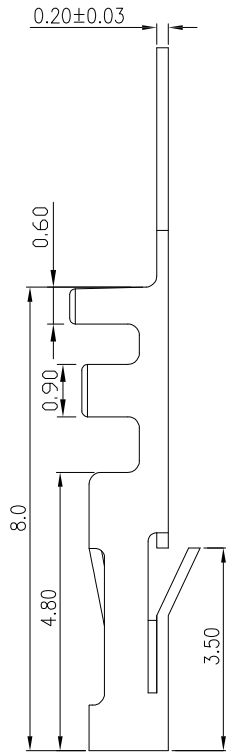


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

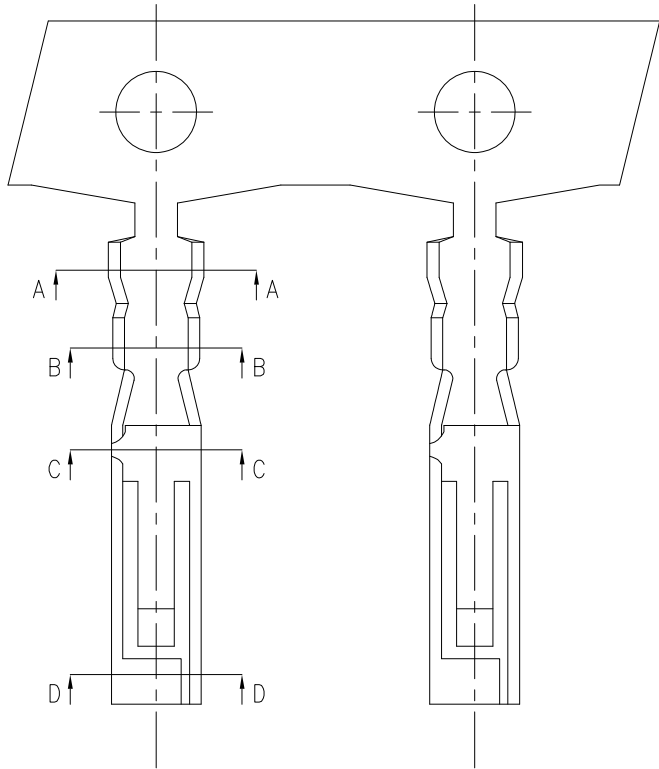


SEC:A-A



SEC:B-B



SEC:C-C



SEC:D-D

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.2kgf/PIN MIN
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 125V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000 MΩ Min
4-4.DIELECTRIC WITHSTANDING : 500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC:PAPER PLATE
7.P/N: C2003 T F X-X

SERIES NO: _____ PLATING:
CONNECTOR: _____ A-ALL AU G/F
T-TERMINAL C-BRIGHE TIN
D-FOG TIN
MALE FEMALE: _____ MATERIAL:
F-FEMALE P-PHOSPHOR BRONZE
B-BRASS

Ordering Information & Specifications

Wire Range	Insulation O.D.	Qty/reel
AWG#24-#28	1.15mm(max)	10,000pcs

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C2003TFX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12				
				0.0±0.35	X°REF±6°							
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch2.00mm 线对线母端子 AWG24#-28#			
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang		21.10.12		
											REV: A0	SHEET: 1/1