


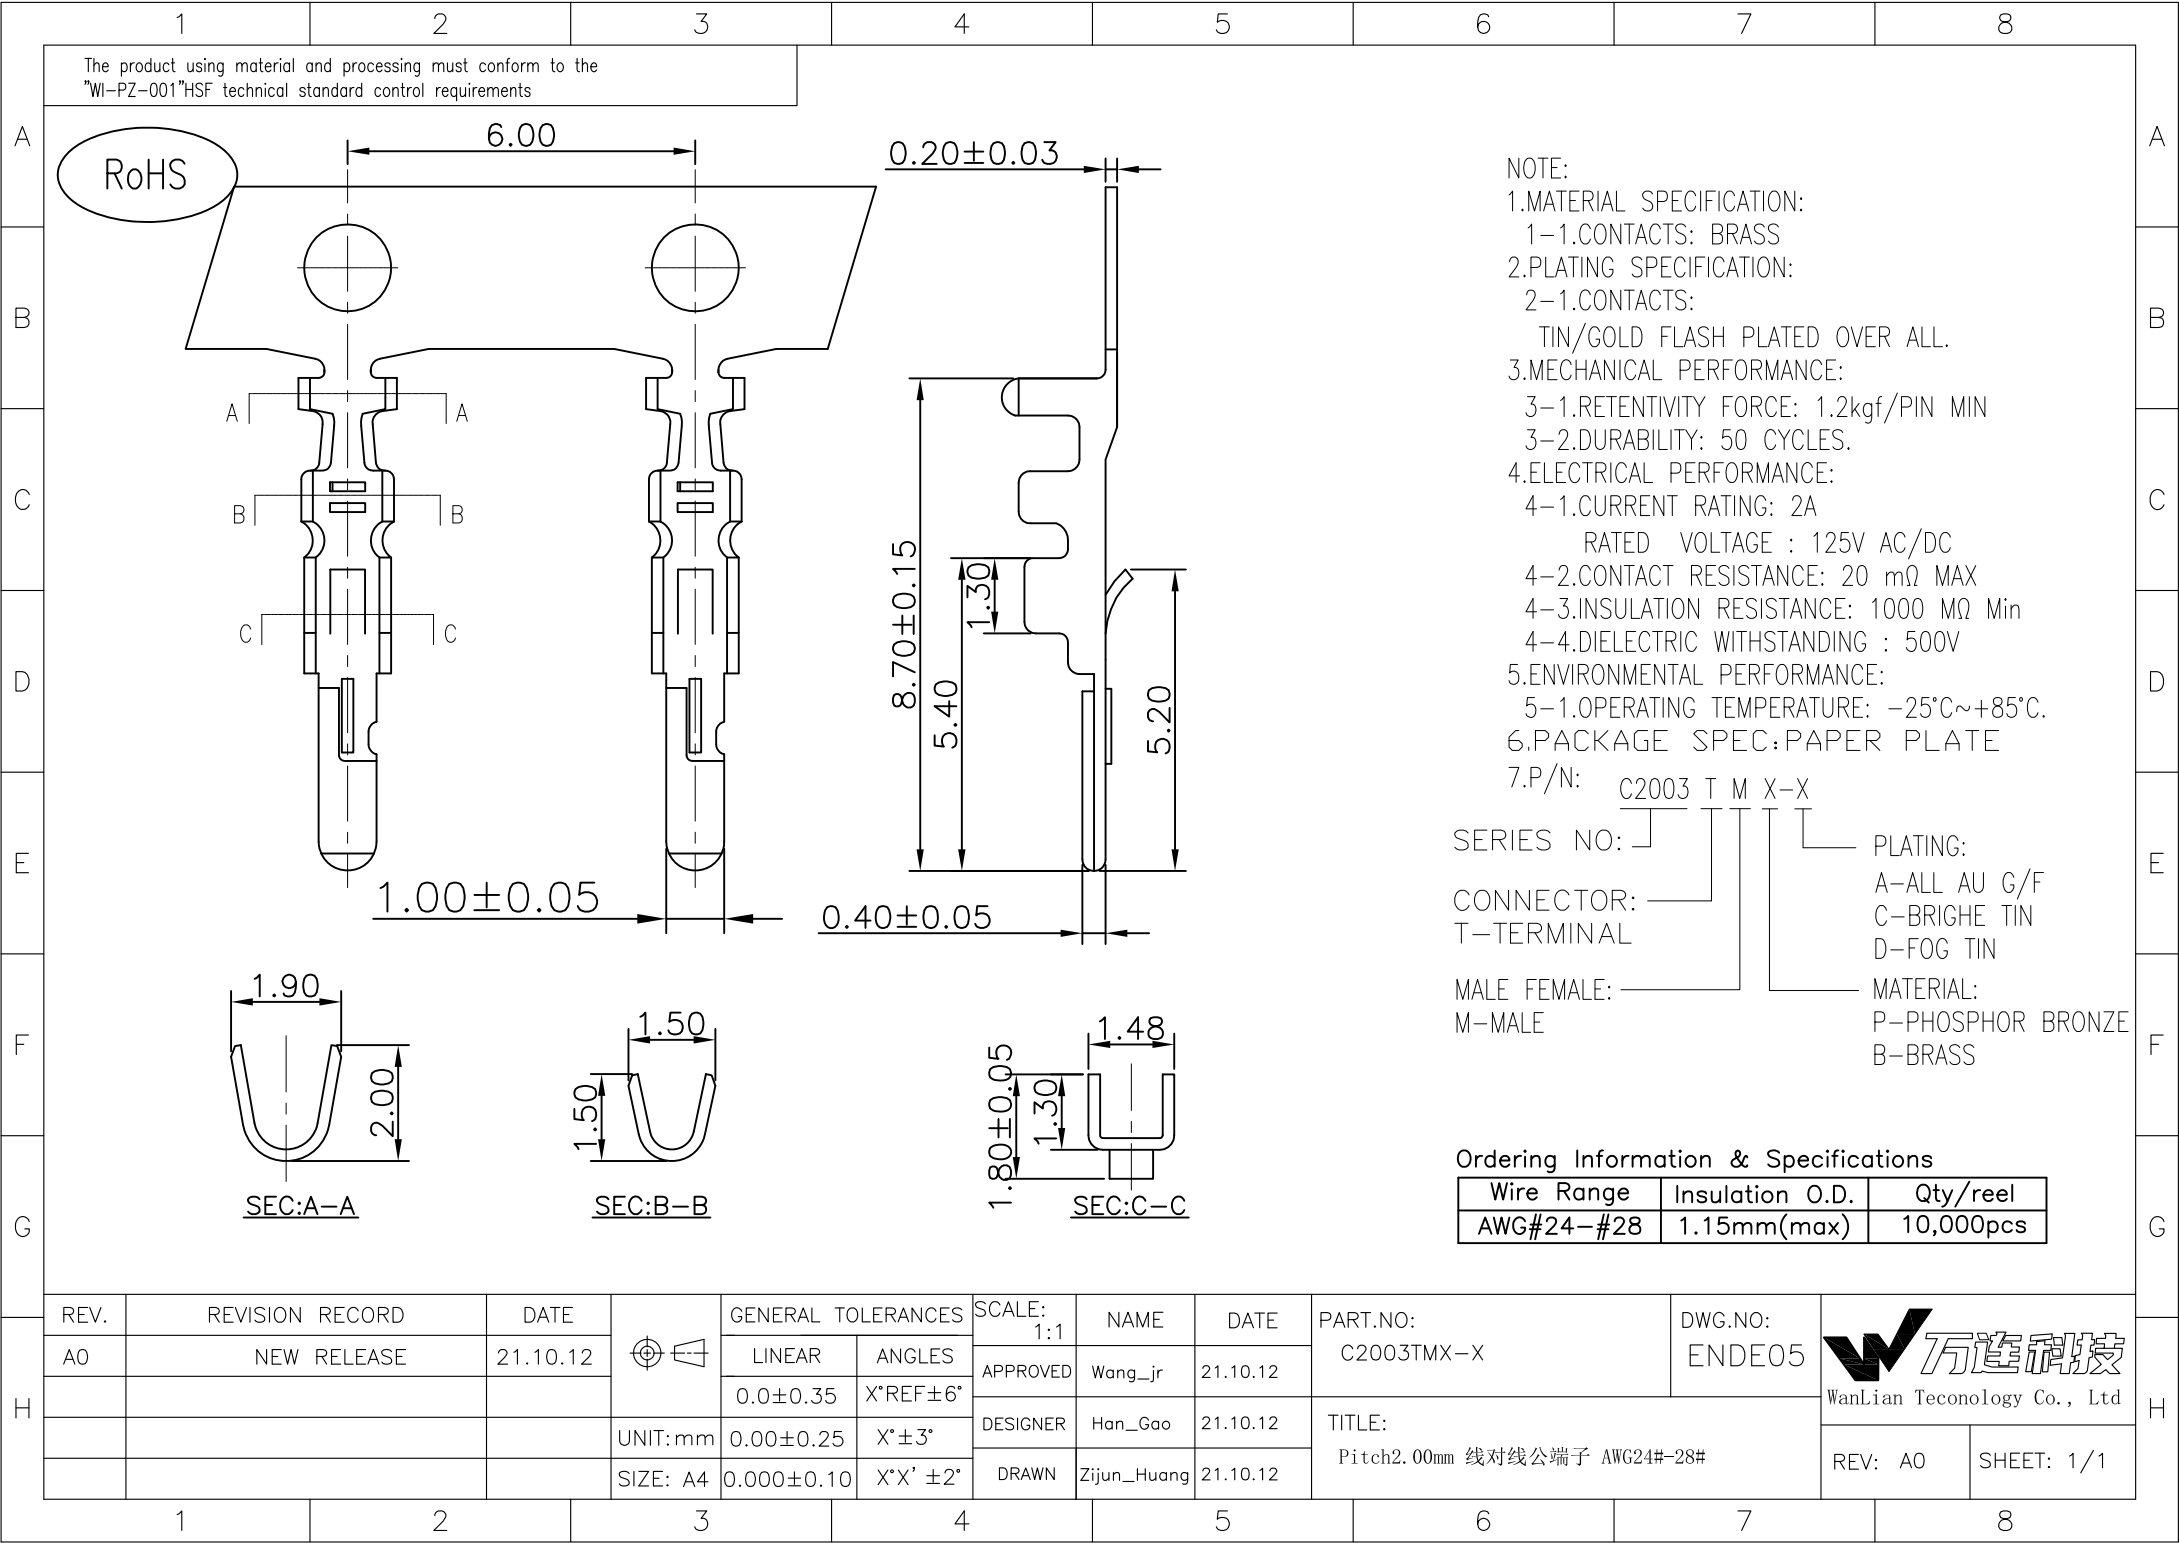

NOTE:

1.MATERIAL SPECIFICATION:
1-1.CONTACTS: BRASS

2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.2kgf/PIN MIN
3-2.DURABILITY: 50 CYCLES.

4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 125V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000 MΩ Min
4-4.DIELECTRIC WITHSTANDING : 500V

5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.

6.PACKAGE SPEC:PAPER PLATE

7.P/N: C2003 T M X-X

SERIES NO: T M X-X

CONNECTOR: T-TERMINAL

MALE FEMALE: M-MALE

PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-FOG TIN

MATERIAL:
P-PHOSPHOR BRONZE
B-BRASS

Ordering Information & Specifications

Wire Range	Insulation O.D.	Qty/reel
AWG#24-#28	1.15mm(max)	10,000pcs

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C2003TMX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12			
				0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch2.00mm 线对线公端子 AWG24#-28#	REV: A0	SHEET: 1/1
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.10.12			
			SIZE: A4	0.000±0.10	X°X' ±2°						