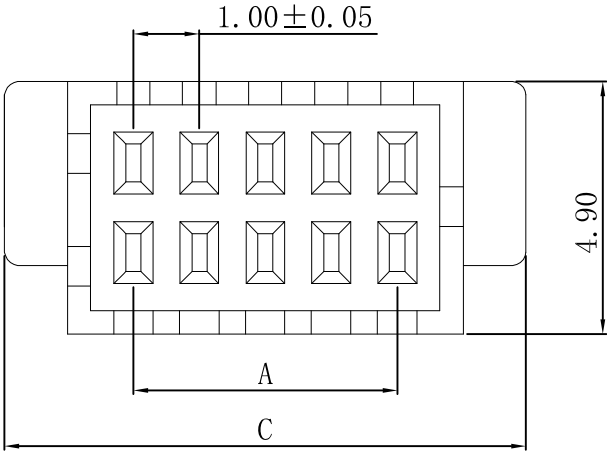
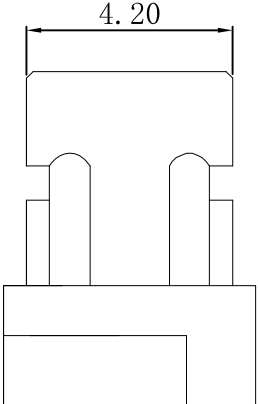
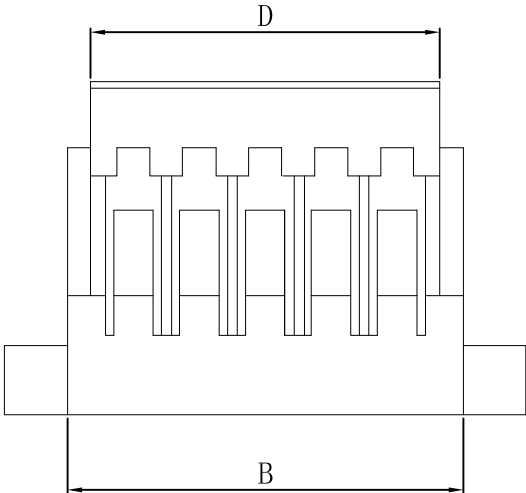



1	2	3	4	5	6	7	8					
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements			NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: PBT,UL94V-0 2.MECHANICAL PERFORMANCE: 2-1.RETENTIVITY FORCE: 0.5kgf/PIN MIN 2-2.DURABILITY: 30 CYCLES. 3.ELECTRICAL PERFORMANCE: 3-1.CURRENT RATING: 1A RATED VOLTAGE : 50V AC/DC 3-2.CONTACT RESISTANCE: 20 mΩ MAX 3-3.INSULATION RESISTANCE: 100MΩ Min 3-4.DIELECTRIC WITHSTANDING : 500V 4.ENVIRONMENTAL PERFORMANCE: 4-1.OPERATING TEMPERATURE: -25°C~+85°C. 5.PACKAGE SPEC: PE BAG 5.P/N: A1003 H M-2 XX X 0 SERIES NO: _____ CONNECTOR: _____ H-HOUSING MALE FEMALE: _____ M-MALE ROW NO: _____ 2-DOUBLE ROW COLOR: A-BLACK K-WHITE S-NATURE Poles: 08-50PIN									
A	RoHS					A						
B								B				
C								C				
D								D				
E								E				
F								F				
G								G				
REV.		REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO		NEW RELEASE	21.10.12	LINEAR 0.0±0.35		ANGLES X°REF±6°	APPROVED	Wang_jr	21.10.12	A1003HM-2XXX0		
				UNIT:mm		0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch 1.00mm 180°SHD双排带凸台胶壳	
				SIZE: A4		0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.10.12		
1		2	3	4	5	6	7	8				