

1-SINGLE ROW

PART NO.	Dimension mm			Q'ty/BAG
	A	B	C	
02	3.70	2.40	1.00	1000PCS
03	4.70	3.40	2.00	1000PCS
04	5.70	4.40	3.00	1000PCS
05	6.70	5.40	4.00	1000PCS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	REV: A0	SHEET: 1/2
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	A1008HM-1XXX0	ENDE05			
				0.0±0.35	X*REF±6°								
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE:			
				SIZE: A4	0.000±0.10	X°X'±2°	DRAWN	Longcan_Liu	21.01.13	PITCH 1.00mm 180°MX单排带小扣无卤胶壳			



WanLian Teconology Co., Ltd

REV: A0

SHEET: 1/2

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

A

B

C

D






E

F

G

H

RoHS+HF

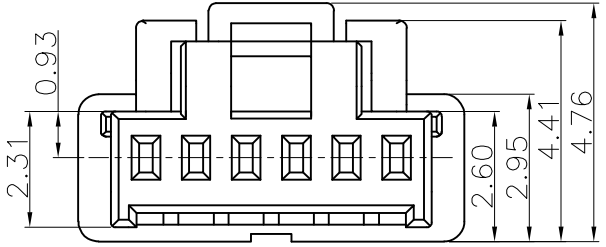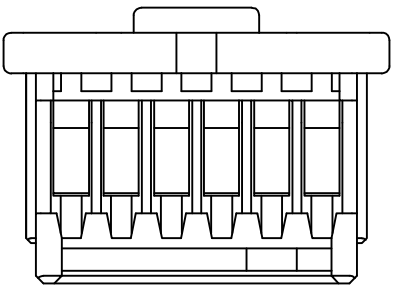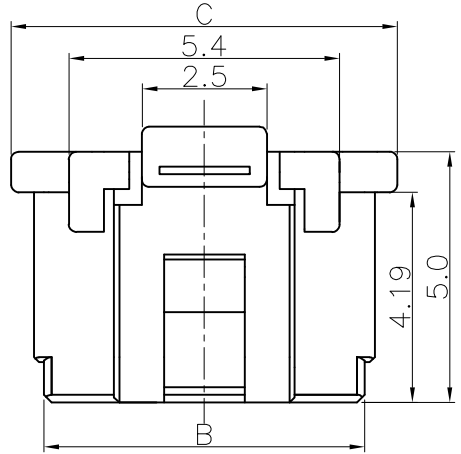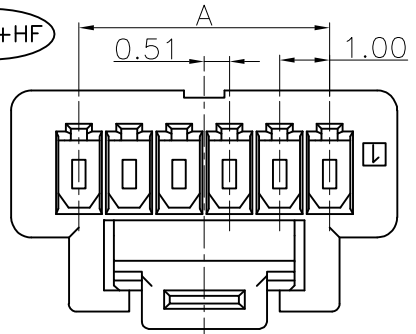

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66,94-V0
2.MECHANICAL PERFORMANCE:
2-1.INSERTION FORCE: 0.2KGF/PIN MAX
2-2.REMOVAL FORCE: 0.03KGF/PIN MIN
2-3.DURABILITY: 50 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 1A AC,DC
RATED VOLTAGE : 50V AC,DC
3-2.INSULATION RESISTANCE: 100MΩ MIN
CONTACT RESISTANCE : 20mΩ MAX
3-3.WITHSTANDING VOLTAGE:500V AC/MINUTE
4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC:PE BAG
6.P/N: A1008 H M-1 XX X 0
SERIES NO: | | | | |
COLOR:
A-BLACK
K-WHITE
S-NATURE
CONNECTOR:
H-HOUSING
MALE FEMALE:
M-MALE
PIN Q'PY:
02~16
ROW NO:
1-SINGLE ROW

TABLE:

PART NO.	Dimension mm			Q'ty/BAG
	A	B	C	
06	5.00	6.40	7.70	1000PCS
07	6.00	7.40	8.70	1000PCS
08	7.00	8.40	9.70	1000PCS
09	8.00	9.40	10.70	1000PCS
10	9.00	10.40	11.70	1000PCS
11	10.00	11.40	12.70	1000PCS
12	11.00	12.40	13.70	1000PCS
13	12.00	13.40	14.70	1000PCS
14	13.00	14.40	15.70	1000PCS
15	14.00	15.40	16.70	1000PCS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1008HM-1XXX0	DWG.NO: ENDE05
				LINEAR	ANGLES					
A0	NEW RELEASE	21.01.13		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.01.13		
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: PITCH 1.00mm 180°MX单排带扣无卤胶壳	
			UNIT:mm	0.000±0.10	X°X'±2°	DRAWN	Longcan_Liu	21.01.13		

WanLian Teconology Co., Ltd

REV: A0

SHEET: 2/2