

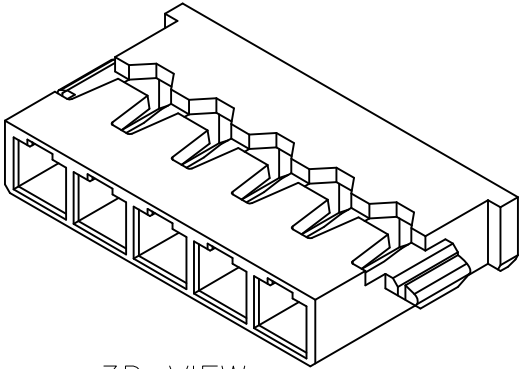
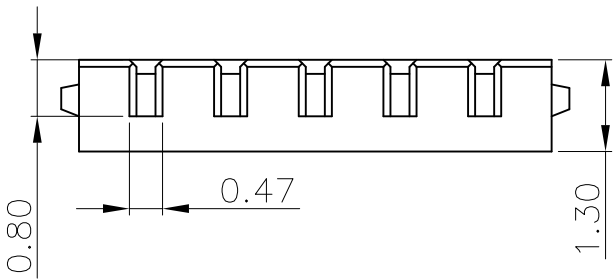


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

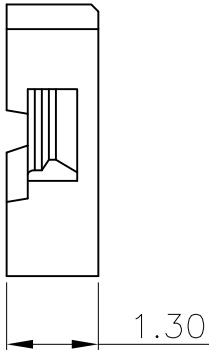

3D VIEW

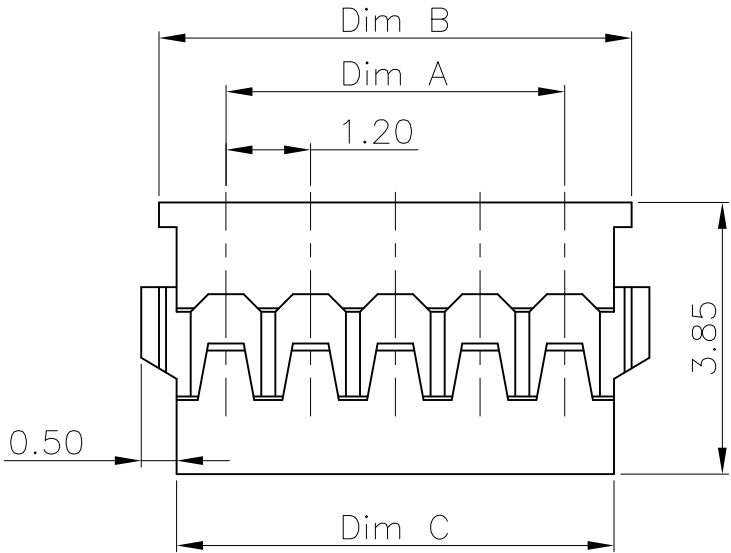

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: LCP,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 0.05KGF/pin min
2-2.DURABILITY: 10 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1.5A AC/DC
RATED VOLTAGE : 50V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 100MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N: A1201 H M-1 XX X 0
SERIES NO: H M-1 XX X 0
COLOR:
A-BLACK
K-WHITE
S-NATURE
CONNECTOR: H-HOUSING
PIN Q' PY: 02~07,10
MALE FEMALE: M-MALE
ROW NO: 1-SINGLE ROW

Part No.	Dimensions (mm)		
	A	B	C
02P	1.20	3.10	2.60
03P	2.40	4.30	3.80
04P	3.60	5.50	5.00
05P	4.80	6.70	6.20
06P	6.00	7.90	7.40
07P	7.20	9.10	8.60
09P	9.60	11.50	11.00
10P	10.80	12.70	12.20

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1201HM-1XXX0	DWG.NO: ENDE05	
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09			
				0.0±0.35	X*REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.05.09	TITLE: Pitch 1.20mm MX 180° Single row Housing	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.05.09	REV: A0		SHEET: 1/1