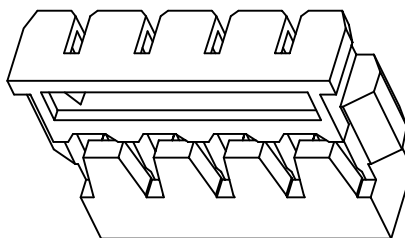


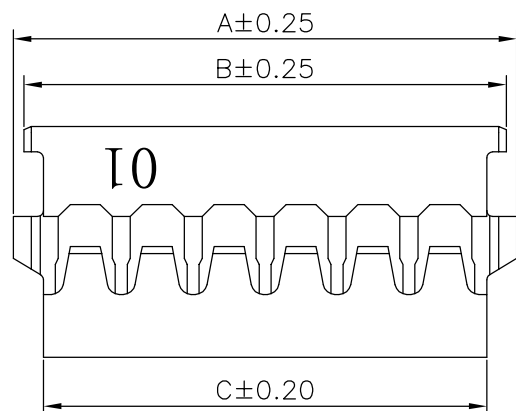
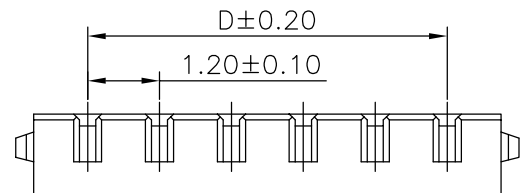


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

$$(R_0HS + HF)$$


3D View

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: LCP,UL94V-0

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 1.5A

RATED VOLTAGE : 50V

2-2.CONTACT RESISTANCE: 20 mΩ MAX

2-3.INSULATION RESISTANCE: 100MΩ Min

2-4.DIELECTRIC WITHSTANDING : 500V AC

3.ENVIRONMENTAL PERFORMANCE:

3-1.OPERATING TEMPERATURE: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

4.PACKAGE SPEC: PE BAG

5.P/N:

SERIES NO: A1201 H M-1 XX X 1

— COLOR:
A—BLACK
S—NATURE

CONNECTOR:-

H-HOUSING

— PIN Q' PY:
02~06

MAIF FFMAIF:

M—MALE

—ROW NO:

1-SINGLE ROW

Ordering Information & Dimensions

Circuit	Dimensions(mm)			
	A	B	C	D
02	3.60	3.25	2.60	1.20
03	4.80	4.45	3.80	2.40
04	6.00	5.65	5.00	3.60
05	7.20	6.85	6.20	4.80
06	8.40	8.05	7.40	6.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1201HM-1XXX1	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19				
				0.0±0.35	X*REF±6°							
			UNIT: mm	0.00±0.25	X*±3°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 1.20mm MX 单排 胶壳			
				SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	LanXuan_Hou		22.03.19		
											REV: AO	SHEET: 1/1