




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

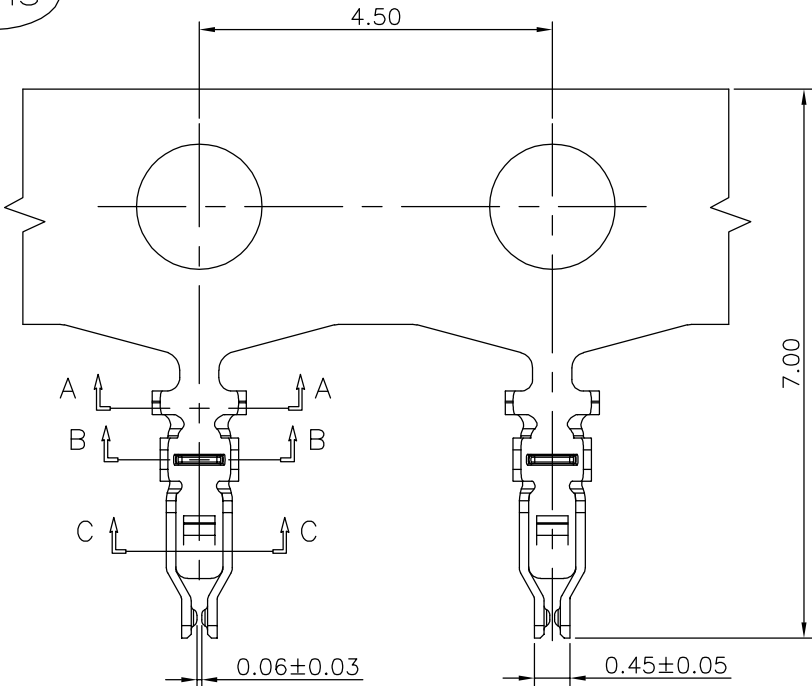


SECTION:A-A



SECTION:B-B



SECTION:C-C

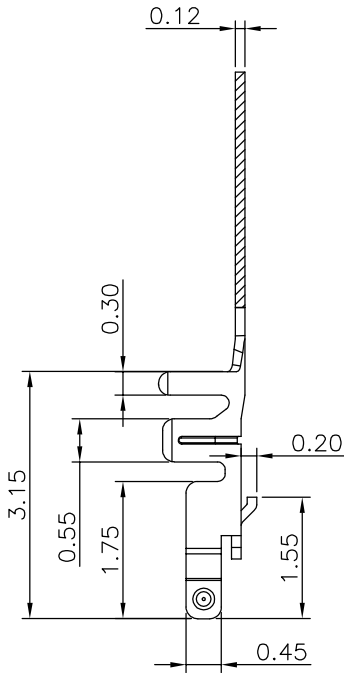

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.TERMINAL: PHOSPHOR BRONZE
 - 2.PLATING SPECIFICATION:
 - 2-1.TERMINAL:
 - TIN/GOLD FLASH PLATED OVER ALL.
 - 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1.5A
 - RATED VOLTAGE : 50V
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 100MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V AC
 - 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - 5.WIRE RANGE: AWG28#~30#
 - 6.PACKAGE SPEC: REEL
 - 7.P/N:

SERIES NO: A1201 T 1 F X-X


CONNECTOR: T-TERMINAL

TYPE CODE

MALE FEMALE: F-FEMALE M-MALE

PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE TIN

METAL: P-PHOSPHOR BRONZE B-BRASS

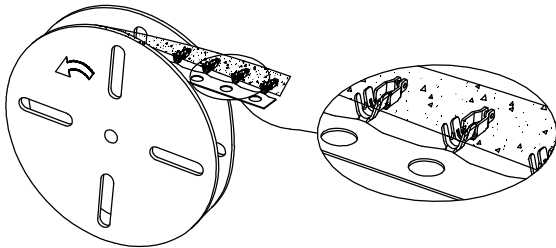

SCALE 4:1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1201T1FX-X	DWG.NO: ENDE05		
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19				
				0.0±0.35	X°REF±6°				CHECK	XueZe_Ma	22.03.19	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou				22.03.19
			SIZE: A4	0.000±0.10	X°X' ±2°	TITLE: Pitch 1.20mm MX 母端子 AWG#28~#30				REV: A0	SHEET: 1/1	