

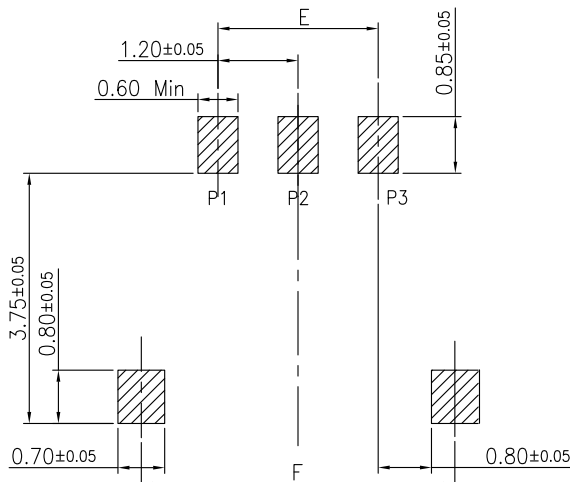
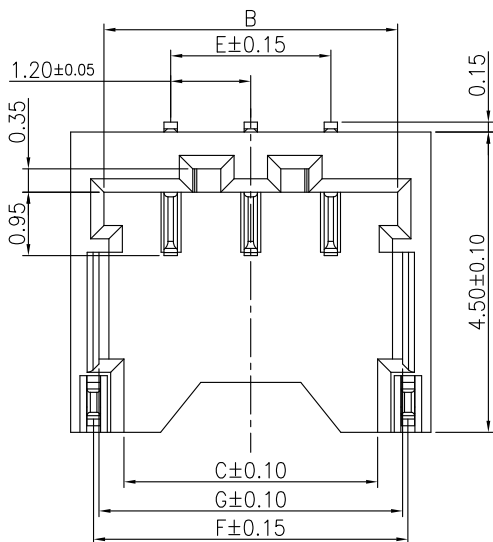


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

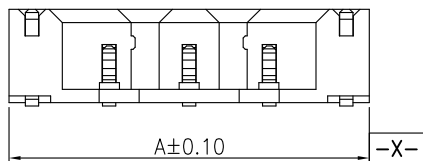

RECOMMENED PCB LAYOUT
GENERAL TOLERANCE ±0.05

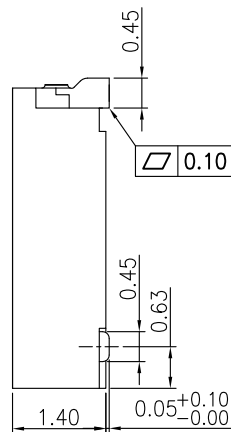

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING: LCP 94V-0
- 1-2.CONTACTS: BRASS
- 1-3.SOLDERING LUG: BRASS

2.PLATING SPECIFICATION:

- 2-1.CONTACTS:
Au PLATED OVER ALL.
- 2-2.:SOLDERING LUG:
Sn PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

- 3-1.CURRENT RATING: 1.0A
- 3-2.VOLTAGE RATING: 125V MAX
- 3-3.CONTACT RESISTANCE: 40mΩ Max.
- 3-4.INSULATION RESISTANCE: 100MΩ MIN
- 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -20°C~+85°C.

5.PACKAGE SPEC:REEL

6.P/N ORDER:



A1203 W 9-1 XX 2 X X 0

SERIES NO:

CONNECTOR:
W-WAFER

ANGLE:
9-90°

ROW NO:
1-SINGLE ROW

PIN Q'PY:
02~16

COLOR:
A-BLACK
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin

TERMIPOINT:
2-SMT

Circuit	A	B	C	E	F	G
2	4.20	3.20	2.60	1.20	3.50	3.10
3	5.40	4.40	3.80	2.40	4.70	4.30
4	6.60	5.60	5.00	3.60	5.90	5.50
5	7.80	6.80	6.20	4.80	7.10	6.70
6	9.00	8.00	7.40	6.00	8.30	7.90

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.01.13
A1	PART NUMBER RENEWAL	23.10.09



GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X'±2°

SCALE:
1:1

APPROVED

DESIGNER

DRAWN

NAME

Wang_jr

Han_Gao

Zijun_Huang

DATE

23.10.09

23.10.09

23.10.09

PART.NO:

A1203W9-1XX2XX0

TITLE:

WAFER PH1.2 CONN WITH GROOVE





DWG.NO:

ENDE05

万进科技
WanLian Technology Co., Ltd

REV: A1

SHEET: 1/2

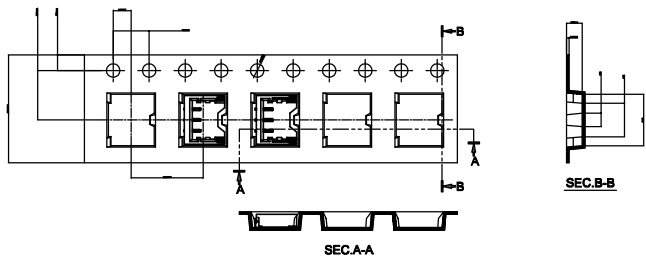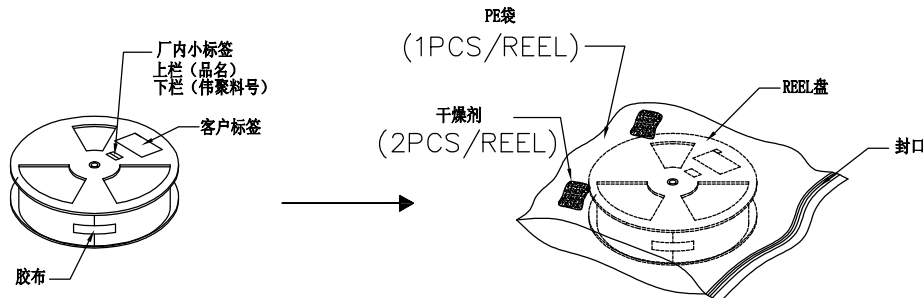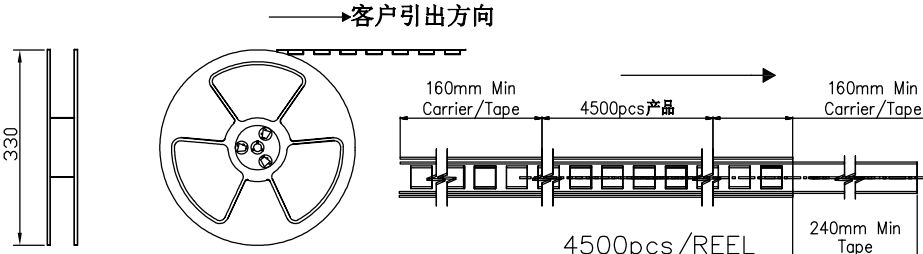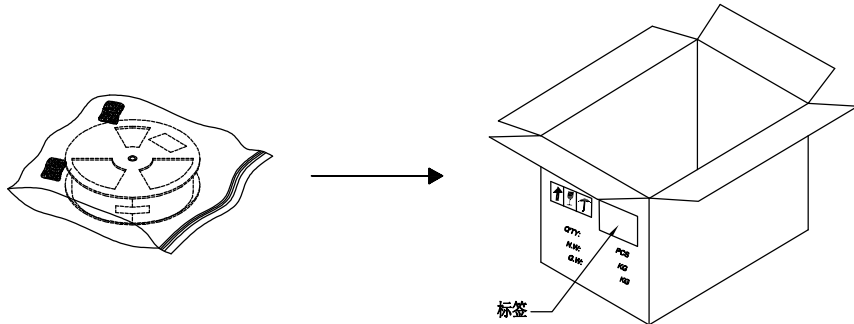1	2	3	4	5	6	7	8																																																										
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																																	
一、载带 Pitch: 14.40mm, 如下图。 				三、胶盘上贴成品包装标签, 注明料号、数量及制造日期。然后将REEL 盘装入防水袋内, 并放入2袋干燥剂, 并用热封机将PE 袋封口。 																																																													
二、包装开始载带及盖膜需预留约160mm Min 之空带, 并用胶布将其粘紧于胶盘轴心。将成品如图一所示方向, 依次放入载带。包装最后载带需预留约160mm Min 之空带, 上盖膜需预留比载带长240mm Min。 一卷REEL可放置数量为: 4500 PCS, 如下图。 				四、将装有REEL 盘的PE 袋装入纸箱内, 放满为止。然后用胶带将纸箱封口, 并在指定位置贴上标签, 写明品名、料号、数量、生产日期等信息。 																																																													
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td>PART.NO:</td><td>DWG.NO:</td><td rowspan="2"></td></tr><tr><td>A0</td><td>NEW RELEASE</td><td>21.01.13</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>23.10.09</td><td>A1203W9-1XX2XX0</td><td>ENDE05</td></tr><tr><td>A1</td><td>PART NUMBER RENEWAL</td><td>23.10.09</td><td>0.0±0.35</td><td>X°REF±6°</td><td>DESIGNER</td><td>Han_Gao</td><td>23.10.09</td><td colspan="2" rowspan="2">TITLE: WAFER PH1.2 CONN WITH GROOVE</td><td rowspan="2">REV: A1</td><td rowspan="2">SHEET: 2/2</td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>X°±3°</td><td>DRAWN</td><td>Zijun_Huang</td><td>23.10.09</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>												REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	APPROVED	Wang_jr	23.10.09	A1203W9-1XX2XX0	ENDE05	A1	PART NUMBER RENEWAL	23.10.09	0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.10.09	TITLE: WAFER PH1.2 CONN WITH GROOVE		REV: A1	SHEET: 2/2				UNIT:mm	X°±3°	DRAWN	Zijun_Huang	23.10.09				SIZE: A4	0.000±0.10	X°X' ±2°						
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:																																																							
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.10.09	A1203W9-1XX2XX0	ENDE05																																																							
A1	PART NUMBER RENEWAL	23.10.09		0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	23.10.09	TITLE: WAFER PH1.2 CONN WITH GROOVE		REV: A1	SHEET: 2/2																																																					
				UNIT:mm	X°±3°	DRAWN	Zijun_Huang	23.10.09																																																									
			SIZE: A4	0.000±0.10	X°X' ±2°																																																												
1	2	3	4	5	6	7	8																																																										